JUN 6 1942

electronics

REFERENCE and DIRECTORY *Issue*

JUNE • 1942

PRICE ONE DOLLAR

McGRAW-HILL PUBLISHING CO., INC.

Pioneering in development of the frequencies of the future

Even as Amperex engineers distinguished themselves by exclusive developments in the design and structure of ultra-high frequency transmitting tubes . . . so are they now intent upon exploring the infinitely higher frequencies.

While these improvements originating in our research and engineering departments are entirely restricted to military operations, they will be released, in due time, for broadcast, industrial and electro-medical application.

AMPEREX ELECTRONIC PRODUCTS

79 WASHINGTON STREET **BROOKLYN, NEW YORK**

A McGRAW-HILL PUBLICATION

electronics

Vol. 15 No. 6

CONTENTS—JUNE, 1942

Reference and Directory Issue

ELECTRONICS REFERENCE ISSUE 51

Section I Industrial Tube Characteristics 52

A not-too-technical discussion of the characteristics of electron tubes and their determination by measuring the input and output voltages and currents to obtain input, output and transfer effects. From this point of view most electron tubes may be regarded as simple circuit elements whose voltage-current relations are usually expressed by graphical plots. Vacuum and gaseous tubes are treated as impedances, whereas phototubes and cathode-ray tubes behave as energy converters to change light into electrical energy and vice versa

Section II Tubes and Their Functions 61

A discussion of the electron tube as a circuit element in industrial applications. Based on the tube characteristics described in Section I, the fundamental operations of tubes as relays, rectifiers, amplifiers, light-operated controls, and waveform analyzers are enumerated. The conditions of best operation of an amplifier as the plate load is varied, and the use of the tube as a measuring instrument are covered. Two-element and control type gaseous rectifiers, phototube, and cathode-ray tube circuits are treated

Section III Tubes at Work 70

The electron tube roll's up its sleeves, puts on its overalls, and goes to work to aid production. The applications outlined in this section are typical of the innumerable uses to which tubes can be used for the measurement, control, or instrumentation of industrial operations, but they are, by no means, exhaustive. All of the examples illustrated represent practical industrial applications whose merit and utility have been proven in actual operation

ELECTRONICS DIRECTORY OF MANUFACTURERS ..... D-1 to D-37

An alphabetical index of American manufacturers of:
- Basic commodities used in the fabrication, assembly, and maintenance of electronic devices
- Test and measurement items used in the design, production and adjustment of electronic devices
- Devices having electronic operating principles

DEPARTMENTS

TUBES	128	NEW PRODUCTS	156
ELECTRON ART	140	BACKTALK	166
NEW BOOKS	146-B	PATENTS	169
NEWS OF THE INDUSTRY	152	INDEX TO ADVERTISERS	222

KEITH HENNEY
Editor

Donald G. Fink, Managing Editor (on leave)
Beverly Dudley, Acting Managing Editor
W. W. MacDonald, Associate Editor
Craig Walsh, Associate Editor
M. L. Mattey, Assistant Editor
J. M. Heron, Assistant Editor

Harry Phillips
Art Director

•

H. W. MATEER
Publisher

Wallace B. Blood
Sales Manager

J. E. Blackburn, Jr.
Director of Circulation

Contents Copyright, 1942, by McGraw-Hill Publishing Company, Inc.

McGRAW-HILL PUBLISHING COMPANY, INC.

JAMES H. McGRAW
Founder and Honorary Chairman

Publication Office
99-129 North Broadway, Albany, N. Y.
U. S. A.

Editorial and Executive Offices
330 West 42nd St., New York, N. Y., U.S.A.
James H. McGraw, Jr., President
Howard Ehrlich, Executive Vice President
Mason Britton, Vice President
B. R. Putnam, Treasurer
Joseph A. Gerardi, Secretary

Cable Address:
MCGRAWHILL, New York
Member A. B. P. Member A. B. C.

ELECTRONICS, June, 1942, Vol. 15; No. 6. Published monthly, price 50c a copy. (Reference and Directory Issue, $1.00 a copy). Allow at least ten days for change of address. All communications about subscriptions should be addressed to the Director of Circulation, 330 West 42nd Street, N. Y.

Subscription rates—United States and possessions, Mexico, Central and South American countries, $5.00 a year, $8.00 for two years, $10.00 for three years, Canada (Canadian funds accepted), $5.50 a year, $9.00 for two years $11.00 for three years. Great Britain and British possessions 36 shillings for one year, 72 shillings for three years. All other countries, $6.00 for one year, $12.00 for three years. Entered as Second Class matter, August 29, 1936, at Post Office, Albany, New York, under the Act of March 3, 1879. BRANCH OFFICES: 520 North Michigan Avenue, Chicago; 68 Post Street, San Francisco; Aldwych House, Aldwych, London, W.C. 2; Washington, Philadelphia; Cleveland; Detroit; St. Louis; Boston; Atlanta, Ga.; Los Angeles.

UTC
Leads the field
UNITED TRANSFORMER CO.
150 VARICK STREET ★ NEW YORK, N. Y.
EXPORT DIVISION: 100 VARICK STREET NEW YORK, N. Y. CABLES: "ARLA

to Electronic Readers

This issue of ELECTRONICS—largest ever published—includes 125 pages of advertising messages from almost 200 manufacturers.

In these pages is a wealth of information, designed not only to make it easier for you to know more about the equipment and material which you may need in your vital war work, but also to give you ready and intelligent information on the sources of supply.

Thus, through this instrument of communication, your valuable time is conserved. Keep this useful issue within hand's reach throughout the year. It will serve you well.

A McGRAW-HILL PUBLICATION
ABC ABP
330 West 42nd Street, New York, N. Y.

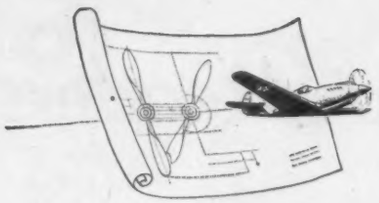

A Simple Blueprint...with a Mallory Complete Contact Assembly ...May Save Many a Flier's Life!

One of the principal manufacturers of variable pitch propellers utilizes electrical contacts to actuate changes in pitch. The electrical contact assembly on this job has to be sure-fire . . . or a pilot can be in the soup before you stop blinking.

Mallory engineers went to work with this aircraft propeller manufacturer's designers when their detailing was still on the drafting boards. Together, Mallory contact specialists and the aircraft engineers developed a new electrical contact assembly, designed for rotary action. Biggest problem was abrasion on the revolving contact surface.

Happy solution came when Mallory created a tri-metallic contact assembly incorporating three Mallory-developed alloys with exactly the right electrical *and* abrasion-resistant properties.

This example of Mallory's complete contact assembly service can mean plenty to you . . . if you're planning production of almost any electrically-actuated device. See us *before* you finish your blueprints. Your Mallory representative is "on call".

Data At Your Elbow! Mallory Contact Catalog.

Complete information on every phase of electrical contact selection, design and service. You need it for your technical library. Write today. No obligation.

P. R. MALLORY & CO., Inc., INDIANAPOLIS, INDIANA • *Cable Address* — PELMALLO

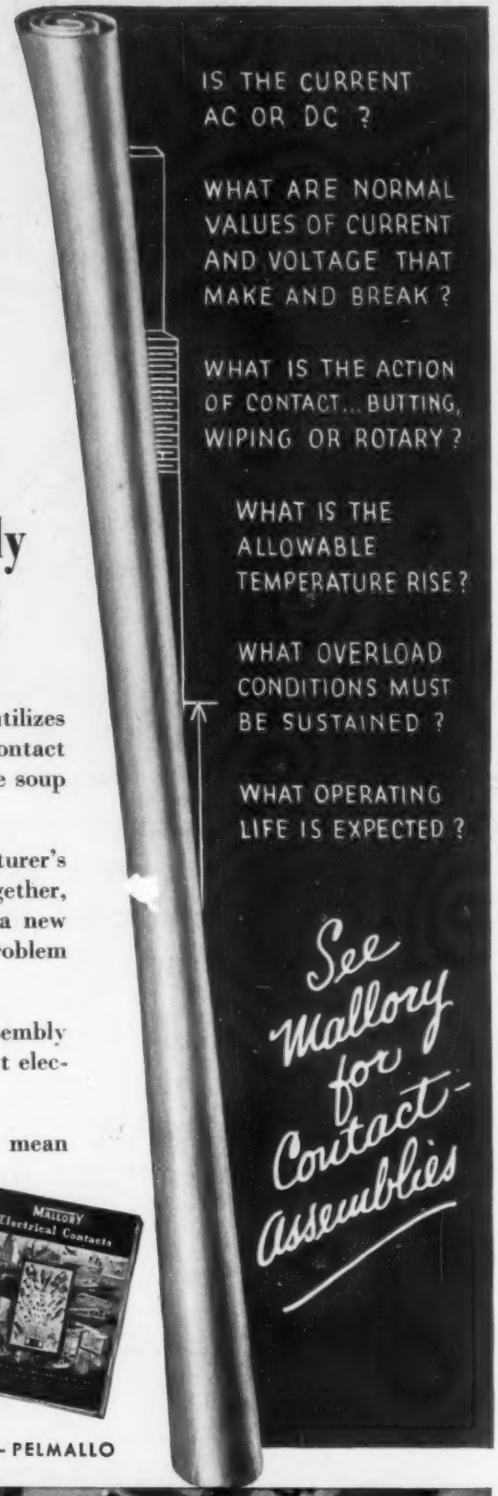
IS THE CURRENT AC OR DC ?
WHAT ARE NORMAL VALUES OF CURRENT AND VOLTAGE THAT MAKE AND BREAK ?
WHAT IS THE ACTION OF CONTACT... BUTTING, WIPING OR ROTARY ?
WHAT IS THE ALLOWABLE TEMPERATURE RISE ?
WHAT OVERLOAD CONDITIONS MUST BE SUSTAINED ?
WHAT OPERATING LIFE IS EXPECTED ?
See Mallory for Contact Assemblies

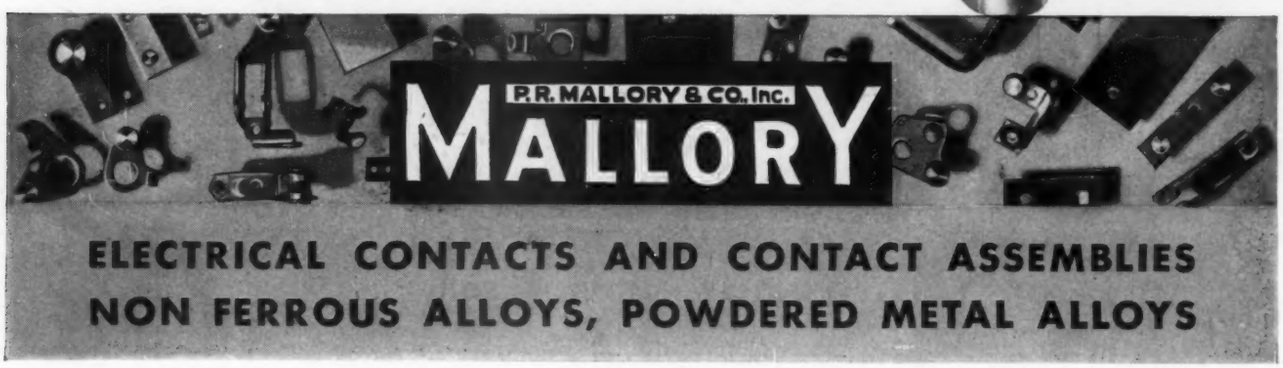

This advertisement also appeared in:
NEW YORK TIMES
CLEVELAND PLAIN DEALER
CHICAGO DAILY NEWS
DETROIT FREE PRESS
WASHINGTON POST

You Expected to Read This NEXT YEAR!

Industry after industry is beating its promise as America's war production sets new world's records . . . Management, labor, W. P. B., Army, Navy, the Maritime Commission and other government departments are cooperating to make next year's headlines come true THIS year.

In World War I, the Kaiser feared American manpower. In World War II, Hitler is even more fearful of our rapid transition from peace to war production. . . . He has reason to be afraid.

Printing press factories are exceeding quotas on anti-aircraft gun parts.

Spark plug manufacturers are setting new speed records in machine gun production.

The heavy-transportation industry is making giant chassis for big guns at a faster rate than all the Axis powers combined.

In this industry, men who used to make locomotives and tractors are changing "Too Little and too Late" to read "Too Much and too Soon," from the enemy's viewpoint.

Starting just a few months ago, with a bale of blueprints and a knowledge of how to build such things as road-scrapers, power-shovels and trucks, the heavy-transportation industry is turning out mobile artillery that will shake the earth in more than a literal sense.

• • •

The story of how this industry joined the army carries a significance which should be understood and remembered.

The significance is that America has solved the problem of exchanging production techniques between specialized industries. This process went on unnoticed in peacetime. War gave it prominence.

OVER

▶When the bales of blueprints were first delivered, and the heavy-transportation industry started on its job of producing prime-movers and chassis for big guns in quantity, new production techniques were needed in a hurry.

▶Here are some of the questions that arose:

"How do you weld such heavy sub-assemblies?"

"What welding fixtures will handle these parts so that our workmen can always weld down-hand?"

"How can we make these long, heavy welds and have sound metal from one end to the other?"

"What's the best technique for testing welded parts? Shall we x-ray, or use the magnaflux process?"

"What's the best way to support these welded assemblies for machining?"

That's just a few of the thousands of questions that arose in the minds of experienced men when they had to solve new problems.

They illustrate the fact that American production methods depend upon specialized techniques and machines.

Each man with such a problem knew that someone, somewhere, had solved his problem, or might solve it before he could work out his own answer.

Therefore he turned to the source of industrial information he had always used when he wanted to know what others were doing . . . his industrial magazine.

Ever since the Maginot Line was flanked, the Industrial Press of America has been helping rookie industries to become veterans in the battle of war production.

▶It doesn't do this by exhortation or command, but by answering thousands of specific questions.

Just as newspapers keep their war correspondents at the front, Industrial Magazines keep their "war-production-correspondents" in the plants where weapons and equipment are made. McGraw-Hill editors are mobilized for war as literally as though they were firing weapons instead of helping to produce them. More than 90% of the time of McGraw-Hill's 153 editors and 725 engineer-correspondents is devoted either to visiting war-production plants (to study production techniques) or in writing "war stories" on how production problems were solved.

"Know-how" is the secret of the amazing records now being made by American Industry. And "know-how" comes from thousands of "little facts" like this:

Information on tool shapes for cutting the harder steels of war is vital literature to the engineer, designer or production man with the particular problem of cutting those steels confronting him.

The industrial editor does not work alone in giving vital information to men on the production line. In much the same way, manufacturers are war-converting their industrial advertising to show their readers how to use their products more effectively. For instance:

A business-paper advertisement showing how to make old taps and dies last longer has no glamour for anyone but the man who must rush production with an inadequate supply of new ones. To him it has enough "oomph" to be clipped and placed on his office wall.

To the casual observer, the Industrial Press is about as exciting as the rows of wires that stretch along every road and railway. . . . The simile is very apt. Both exist solely for the interchange of ideas. Both are typically American in the extent to which they have been developed and applied to the whole economy. . . . *This advertisement published by the McGraw-Hill Network of Industrial Communication.*

• • •

THE McGRAW-HILL NETWORK

23 PUBLICATIONS WHICH HELP MORE THAN 1,000,000 EXECUTIVES, DESIGNERS AND PRODUCTION MEN TO EXCHANGE IDEAS ON WAR-PRODUCTION PROBLEMS

American Machinist • Aviation • Bus Transportation • Business Week • Chemical & Metallurgical Engineering • Coal Age • Construction Methods • Electrical Contracting • Electrical Merchandising • Electrical West • Electrical World • Electronics Engineering & Mining Journal • E. & M. J. Metal and Mineral Markets • Engineering News Record • Factory Management & Maintenance • Food Industries • Mill Supplies • Power • Product Engineering • Textile World • Transit Journal • Wholesaler's Salesman. Also publishers of thousands of books for technical and engineering schools and colleges, as well as for general business use.

McGRAW-HILL PUBLISHING COMPANY, INC.

330 WEST 42nd STREET, NEW YORK

Electron Tubes in Overalls

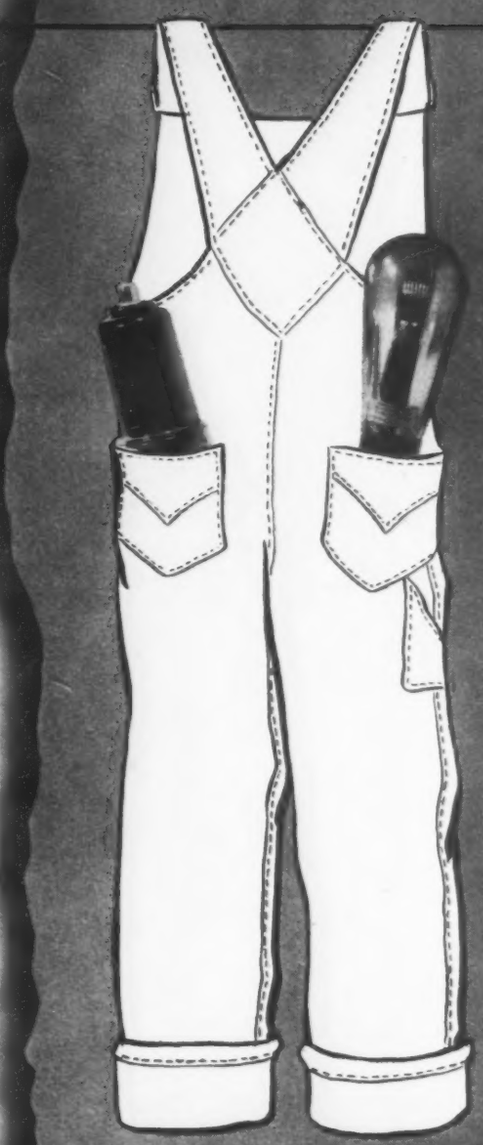

THE electron tube is one of the most versatile and flexible man has produced. In communication it performs duties impossible for any other mechanism. In industry it saves time, it saves in the cost of things, it protects life and property. The tube does many things better, cheaper, quicker than older devices. Many industrial jobs are performed by the tube which cannot be done in other ways. In wartime, the speed-up of production made possible by the electron tube may prove to be its greatest contribution. Tubes have gone into overalls.

It is impossible to give examples of all of the things tube can do within the confines of a single issue of ELECTRONICS. The applications described are typical, and the selection is designed to show not only the ingenuity of engineers working with tubes but the versatility and flexibility of these devices whose motivating force is the ultimate building block of the universe itself—the electron.

C O N T E N T S

SECTION I.....Industrial Tube Characteristics.. 52

SECTION II.....Tubes and their Functions..... 61

SECTION III.....Tubes at Work..... 70

CLASSIFICATION OF ELECTRON TUBES

INPUT	ELECTRICAL ENERGY															RADIANT ENERGY (Light)			
OUTPUT	ELECTRICAL ENERGY												RADIANT ENERGY (Light)		ELECTRICAL ENERGY				
SOURCE OF ELECTRONS	Thermionic Cathode							Pool Cathode			Cold Cathode		Thermionic Cathode		Photoelectric Cathode		Metallic Contact		
METHOD OF CONTROL	None			Electrostatic		Electromagnetic		None	Electro-static	Igniter Electrode	None	Electro-static	Electro-static	Electro-magnetic	Radiant Energy (Light)				
CHARACTER OF CONTROLLED REGION OR SPACE	High Pressure Gas	Low Pressure Gas or Vapor	Vacuum	Gas or Vapor	Vacuum	Gas or Vapor	Vacuum	Vapor	Vapor	Vapor	Gas	Gas	Vacuum	Vacuum	Gas	Vacuum	Metallic		
TUBE NAME	Tungar or Rectigon	Phanotron	Kenotron	Thyratron	Pliotron	Permatron	Magnetron	Pool Tube	Grid Pool Tube	Ignitron	Glow Tube	Grid Glow Tube	Cathode Ray Tube	Cathode Ray Tube	Phototube	Phototube	Barrier Layer Cell		
FUNCTION: RECTIFIER OR SWITCH	●	●	●	●	●	●	●	●	●	●	●	●							
FUNCTION: CONTROLLED RECTIFIER				●	●	●			●	●		●							
FUNCTION: AMPLIFIER				●	●														
FUNCTION: OSCILLATOR, GENERATOR OR INVERTER				●	●		●				●	●							
FUNCTION: VOLTAGE REGULATOR											●	●							
FUNCTION: WAVE FORM ANALYSIS													●	● (MAG. DEF.)					
FUNCTION: LIGHT DETECTION AND MEASUREMENT															●	●	●		

In this tabular classification of electron tubes suitable for industrial purposes the graphical symbol for the type of tube in question is used to designate the customary or possible uses to which the tube is put. Tubes having electrical energy in both input and output circuits may be regarded as impedances, while those in which the input or output is radiant energy may be regarded as energy converters

Industrial Tube Characteristics

OF all methods of controlling energy, that afforded by the use of electron tubes is one of the most convenient and effective.

The advantages of control through the use of electron tubes may be summarized as follows: (1) There is a wide variety of energy transforming devices whose output is capable of being associated with electron tubes. (2) The electrical power output of an electron tube is capable of minute and complete control through the employment of a control element usually called a grid. (3) By coupling the appropriate energy converter to a tube, one form of energy may be transformed into an electrical voltage or current which can then be very easily and conveniently modified in almost any conceivable manner. (4) Through use of the electron tube the expenditure of a minute amount of control power may effect the control of a very considerable amount of power in the output circuit because of the amplifying properties of the tube. (5) Through the appropriate energy converting device in the output circuit of an electron tube, the controlled electrical energy may be reconverted into other forms of energy for the measurement, detection, indication, or control of certain physical, chemical, or other properties. (6) The control afforded through the use of a vacuum tube is of a flexibility and convenience not approached by any other control mechanism. (7) For many applications and in many fields of endeavor, the availability of tubes with extremely high input impedance is a decided advantage. (8) The availability of tubes to handle powers from the smallest up to hundreds of kilowatts, enables the advantages of electron tube control equipment to be applied to the power, industrial, or communications fields with equal facility. (9) With proper design, installation, and maintenance, electron tubes make a stable, rugged, flexible and convenient device of long useful life. (10) Certain types of tubes are available in which one form of energy may be directly converted into another form. Thus, phototubes convert light into an electrical current and conversely cathode-ray tubes convert electrical current into variations of light. Through the use of such tubes, vast opportunities are opened up for the industrial uses of electron tubes. (11) Finally, the unique properties of the electron tube enable it to perform a wide variety of functions, all of which are extremely useful. For example, the tube may operate in the following manner:

(a) As an amplifier, over a wide range of frequency and power.

(b) As an oscillator or generator of voltage over a wide range of frequency, power and waveform.

(c) As a trigger or relay circuit or switch.

(d) As a modulator or demodulator to combine or to separate two or more frequencies.

(e) As a measuring instrument, indicator, or comparator.

(f) As a rectifier or inverter over a very wide range of frequencies, currents, or power.

(g) As a frequency converter to change from one frequency to another.

(h) As a visual indicator or image-forming device as in the electron microscope or the television camera or projecting tube.

All of these advantages and operations cannot be obtained in a single tube. Instead, a very great number of tube types in various classifications according to mode of operation are commercially available. Furtherfore, to make an appropriate selection from the tubes already available, and to utilize the tubes advantageously, some knowledge of the method of operation and the characteristics of the most suitable tubes is necessary.

Types of Electron Tubes

The many types of tubes available for industrial service may be classified according to: (1) the type of control stimulus which causes them to perform the industrial job to which they are assigned, (2) the phenomena occurring within the tube itself, (3) the method of operation, or (4) the number of internal elements or electrodes.

Under the first method of classification, most tubes may be regarded simply as electrical impedances in which a voltage and current are applied to the input terminals and a voltage and current are obtained from the output. Another common type of tube is that which also acts as an energy converter. The phototube, for example, converts radiant energy into electrical energy, while the cathode-ray tube converts electrical energy into light.

In the second classification, we may have vacuum tubes providing smooth instantaneous control of output, or gaseous tubes providing control of the average (but not instantaneous) value of the output power. We may have two electrode tubes or rectifiers in which the useful power output is always less than the input. We may also have control tubes or multi-element tubes, in which the useful output is greater than the input control power, the power sources connected to the tube accounting for the difference.

The classification according to method of operation is largely associated with the use of the tube and will be treated in Section II. Tubes are commonly classified according to the number of electrodes. Depending upon whether they have two, three, four, or five electrodes they are known as diodes, triodes, tetrodes or pentodes. Two element tubes may be regarded as two terminal networks. All commonly used multi-element tubes in which a varying signal is impressed on only one grid, may be thought of as equivalent to a rather special kind of four terminal T or Y network, which can be analyzed by studying the input and output current and voltage relationships.

To obtain a picture of the funda-

mentals of operation, it is desirable to classify tubes according to the phenomena which makes them work.

Fundamental Operations of Control Tubes

All control tubes consist of at least three elements: (1) A source of the electrons (or ions), usually produced by the cathode, which permits conduction of an electric current through the tube; (2) an electrode (plate or anode) to collect the electrons (or ions) within the evacuated space of the tube; and (3) control elements or modifying arrangements (grid) almost always located in the space between the source of electrons and the collector and whose purpose is to modify the flow of current in some manner in accordance with the voltage on this control element. The cathode (which supplies the electrons) and the control element form the input terminals whereas the cathode and the collector form the output terminals of the tube, as usually used. Two-element tubes do not have the control element.

Let us assume that we have the most common type of control vacuum tube securely locked up in a black box with a number of terminals marked on it. Beyond the markings on these three pairs of terminals, we do not care at all, for the moment, as to the nature of the contents of the box. Our primary purpose is to investigate the properties of the device in this box in terms of external conditions which we can easily measure with electrical instruments.

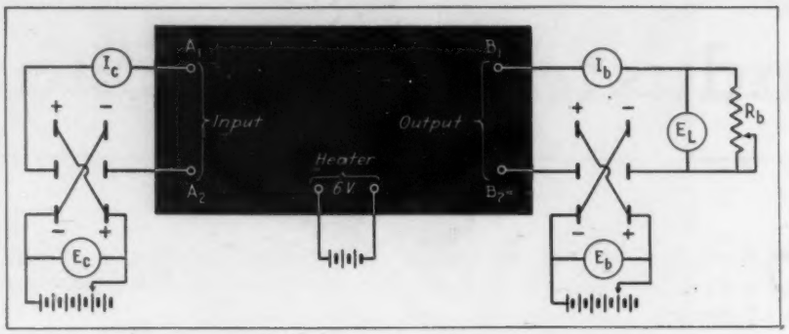

Fig. 1—Schematic wiring diagram for determining the input, output, and transfer characteristics of electron tube contained in the black box

The three sets of terminals are labelled input, output and heater. The heater terminals must be connected to a battery of proper voltage. The instruction book with the black box states that a battery must be placed in series with the output circuit and another in series with the input circuit.

If the box is connected as shown in Fig. 1 and we attach to it certain meters as indicated we are in a position to learn all we want to know about its d-c or static characteristics. All we have to do is to vary the polarity and magnitude of the voltages E_c and E_b and measure the resulting input and output currents.

We shall find that: (1) For all voltages E_c for which terminal A_1 is negative with respect to A_2, the input current (and therefore the input power) is negligible. Therefore we can state that the input impedance of the box is very high. (2) Some current flows in the output circuit if terminal B_1 is positive with respect to B_2. No current flows if this polarity is reversed. (3) For a given resistor R_b, and battery voltage E_b, the plate current, I_b, is a function of input voltage, E_c. Over a certain range, this relationship is more or less linear but in general, the relationship is not linear. (4) For a given input voltage, E_c, and load resistor R_b, the output current depends upon the voltage E_b. The voltage between B_1 and B_2 is not E_b but $E_b - I_b R_b$ since a voltage drop occurs across R_b. The plot of current, I_b, against voltage, E_b, is an S-shaped curve in the majority of cases. (5) For constant values of E_c and E_b, the current in the output, I_b, is a

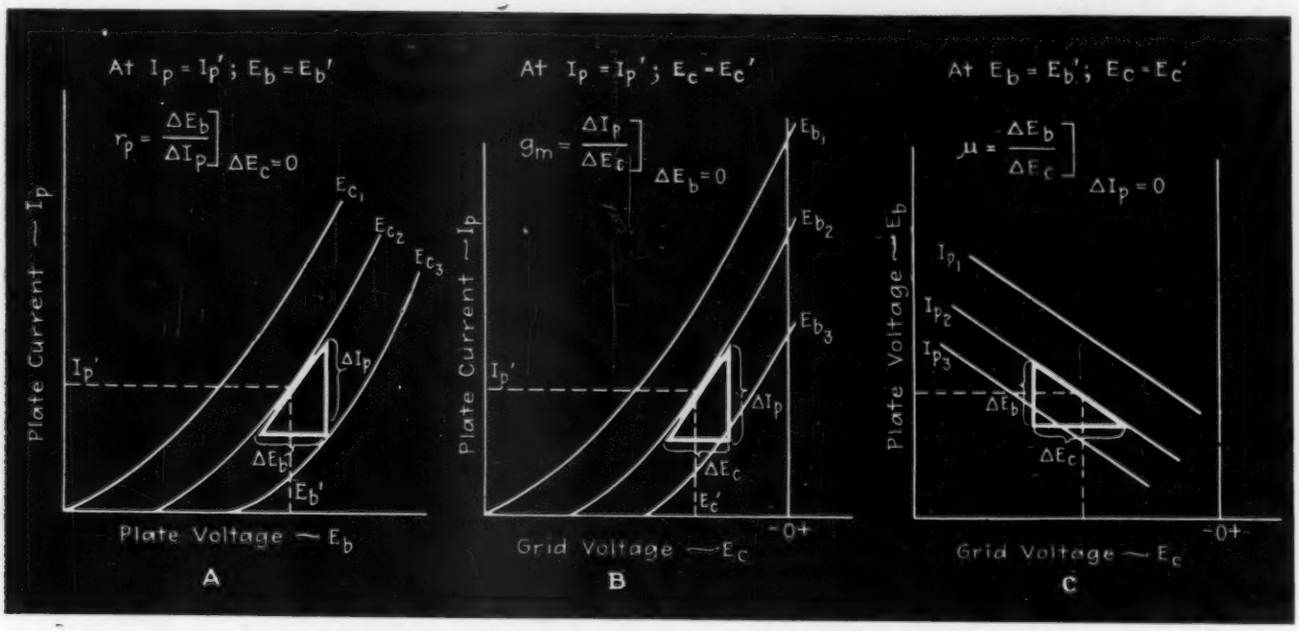

Fig. 2—Output and transfer characteristics of electron tube having characterictics of a triode. Graphical methods of determining plate resistance, r_p, transconductance, g_m, and amplification, μ, are given at *A*, *B*, and *C* respectively

function of the load resistance, R_b. (6) Even a casual examination shows that the output current I_b, is tremendously greater than the input current, and from this we infer that the box may be used as a current amplifier. (7) Voltage variations applied to the input result in a very much larger variation in voltage in the output and measured by E_L. From this, we conclude that the tube in the box may be used as a voltage amplifier. (8) From the last two statements, we conclude that the tube may be used as a power amplifier, since the input voltage and current of minute quantities are capable of controlling a very much larger amount of voltage and current in the output circuit. (9) We note, however, that the polarity of the output voltage across the resistor is opposite from that of the polarity of the input voltages and accordingly, we conclude that the tube operates as a 180 deg. phase shifting network for resistive loads. (10) Electrically we can regard the black box as an impedance, but we note that we must supply sources of power to this impedance for otherwise it will not function properly. In this respect the black box differs from a transformer in which sources of power external to that being transferred are not required to effect the necessary control or transformation. (11) By careful examination of our data, we conclude that the box is, in general, a non-linear device, but that under certain conditions of operation, the relationship between input and output may be made linear. (12) If we were to add an alternating voltage in series with the steady or d-c input voltage, we would measure alternating currents and voltages in the output circuit which are magnified replicas of their input.

If we make a graphical plot of the d-c voltages and currents in the input and output circuits, with the plate resistor short circuited, we obtain the d-c or static characteristics of the tube. The shape of these curves will depend upon the type of tube contained in the box, but the essential concepts of tube operation apply no matter what the curve shape. Typical characteristics for a triode and for a pentode are shown in Figs. 2 and 3. These static characteristics suffice to give us all the important information we need to know concerning tube operation, for from them we can obtain knowledge of: (1) the important tube parameters, amplification factor, μ, plate resistance, r_p, and transconductance, g_m, (2) the required d-c operating voltages for desired operation of the tube, (3) the mode of operation of the tube with any kind of load in its output circuit, and (4) the mode of operation of the tube with any kind of time-varying input signal applied to the grid or input.

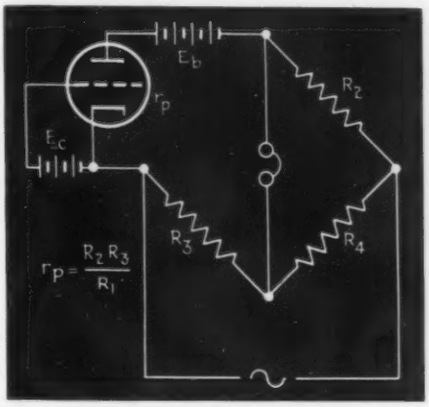

Fig. 4—Bridge circuit for measuring plate resistance for selected grid and plate operating voltages, E_c and E_b

Operating Coefficients for Vacuum Tubes

Since the plate current is a function of the plate voltage, even if the load resistance, R_b of Fig. 1, is short circuited, the plate circuit must have some internal resistance. Its d-c resistance may be determined from Ohm's law, but this value is seldom of any use to the designer and will not be found in manufacturers' literature. The resistance for small changes of plate voltage, and with the grid voltage maintained constant, is very important. It may be measured by the circuit of Fig. 4, for the operating voltages E_c and E_b, since the cathode-plate circuit takes the place of the unknown re-

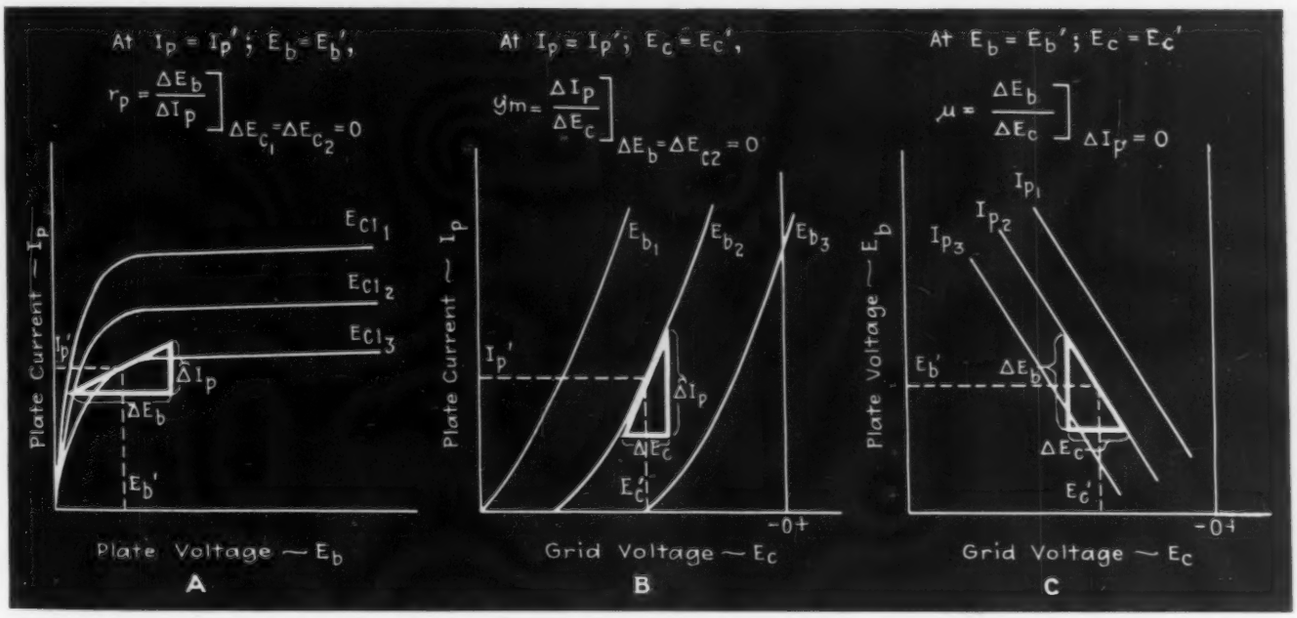

Fig. 3—Output and transfer characteristics of electron tube having characteristics of a pentode. Graphical methods of determining plate resistance, r_p, transconductance, g_m, and amplification factor, μ, are given at A, B, and C respectively

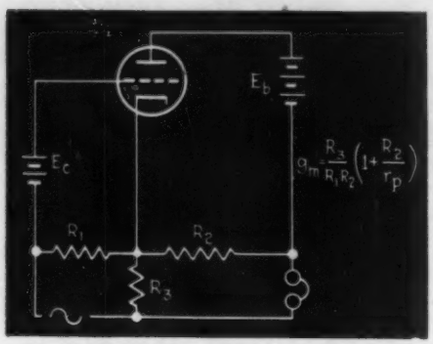

Fig. 5—Circuit for measuring transconductance for grid and plate operating voltages, E_c and E_b, respectively

sistor in one arm of the a-c Wheatstone bridge. In general, a different value of plate resistance is obtained for each new value of E_c and E_b, so these operating voltages should be specified when the plate resistance, r_p, is measured.

The plate resistance is defined as the ratio of the change in plate voltage to the corresponding change in plate current produced, all other voltages being maintained constant. The mathematical definition is given in Fig. 2A and 3A which also shows that the plate resistance at any operating point specified by the dashed lines, may be determined from the inverse slope of the E_b-I_p characteristic at this point. (This is, of course, measured in terms of voltage and current changes as measured on the graph, and not by measuring angles with a protractor.)

For a fixed value of plate voltage, the plate current is a function of the grid voltage, and it is convenient to have a tube factor, which designates the ability of the grid to control the plate current. This term, called the transconductance (formerly called mutual conductance) may be measured by the circuit of Fig. 5. It is defined as the ratio of the change in plate current to the change in grid voltage causing it, under the condition that all other electrode voltages remain constant. As shown in Figs. 2B and 3B, the transconductance is measured by the inverse slope of the E_c-I_p curve, at the point of the characteristic determined by the operating voltages (shown by the dashed lines). The unit of transconductance is the mho or reciprocal ohm, although the terms milliamperes-per-volt and micromho are also employed, since they are more convenient submultiples of the mho.

Finally, we may determine the relative effect of the grid and plate voltages upon the plate current. This is the slope of the constant-current curves of Figs. 2C and 3C, is called the amplification factor, and is designated by the Greek letter μ. The amplification factor may be measured with the circuit of Fig. 6, or it may be determined graphically, as indicated in Figs. 2C and 3C. The amplification factor is a numeric, having no dimensions; it is merely a voltage ratio.

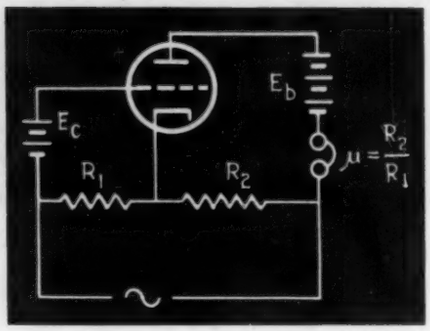

Fig. 6—Simple bridge circuit for measuring amplification factor for grid and plate operating voltages, E_c and E_b

An interesting relation connects these three tube coefficients, for

$$\mu = g_m r_p$$
$$g_m = \mu / r_p$$
$$r_p = \mu / g_m$$

Consequently, if we know the values of any two at the same operating voltages, we can easily calculate the value of the third at the same operating conditions. Tubes may have values of μ from 3 to several thousand (values of 10 for triodes and 800 for pentodes are typical); values of transconductance from 500 to 10,000 micromhos, with 1,500 micromhos a typical value; and values of plate resistance from 500 ohms to 100,000 ohms for triodes and up to several megohms for pentodes. Table I shows operating characteristics for a few typical vacuum tubes.

TABLE I — OPERATING CHARACTERISTICS OF TYPICAL VACUUM TUBES

Type No.	Description	Heater Voltage E_H (Volts)	Heater Current I_H (Amps)	Grid Voltage $-E_{c1}$ (Volts)	Anode Voltage E_b (Volts)	Screen Grid Voltage E_{c2} (Volts)	Anode Current I_b (Ma.)	Amplification Factor μ	Plate Resistance r_p (Ohms)	Transconductance g_m (μ mhos)	Plate Dissipation P_L (Watts)
	Diodes										
6H6	Full Wave Rect.	6.3	0.3	.....	117*	.....	4	.....	.....	.....	.....
12Z3	Half Wave Rect.	12.6	0.3	.....	250	.....	60	.....	.....	.....	.....
219	" " "	22.0	24.5	.....	50,000	.....	2,500	.....	.....	.....	.....
F103A	" " "	28.0	51.0	.....	50,000	.....	9,000	.....	.....	.....	.....
WL-660	" " "	10.0	10.5	.....	230,000	.....	30	.....	.....	.....	.....
	Triodes										
PJ10	Det. Amp. Osc.	5.0	0.25	−9.0	135	.....	3	8	10,000	1,250	.....
6C5	" " "	6.3	0.30	−8.0	250	.....	8	20	10,000	2,000	.....
6F5	" " "	6.3	0.30	−2.0	250	.....	0.9	100	66,000	1,500	.....
89	Amp. Osc.	6.3	0.40	−31.0	250	.....	32	4.7	26,000	1,800	8
841	" "	7.5	1.25	−9.0	425	.....	2.2	30.	40,000	750	12
842	" "	7.5	1.25	−96.0	425	.....	28.	3.	2,500	1,200	12
849	" "	11.0	5.0	*	2,500	.....	350	19.	*	*	400
848	" "	22.0	52.0	*	15,000	.....	1,000	8.	*	*	10,000
862	" "	30.0	325.0	*	20,000	.....	1,500	10.	*	*	125,000
	Tetrodes and Pentodes										
FP-54	Low Grid Cur.	2.5	0.09	*	6	.....	.....	1.0	.....	40	.....
6D6	Voltage Amp.	6.3	0.30	−3.0	250	100	8.2	1,280.	800,000	1,600	1.0
25A6	" "	25.0	0.30	−18.0	160	120	48.	100.	42,000	2,375	5.3
6L6	" "	6.3	0.90	−18.0	350	250	54.	170.	33,000	5,200	19.
813	Beam Tetrode Amp.	10.0	5.0	*	2,000	400	100	*	*	*	100.

* Depends upon method of operation

Characteristics of Gaseous Tubes

If we proceed in the manner already outlined to study the characteristics of gas tubes, we shall obtain results which at first appear to be somewhat erratic but which are, none the less, subject to an orderly and systematic classification.

If we have a two-element tube (i.e. not a control tube) in a blue box the input terminals can be short circuited and we can obtain all of the information we desire from a study of the output voltage and current.

For low values of plate voltage E_b any current which flows at all is measured in microamperes or at most a very few milliamperes. As E_b is increased, a critical value is obtained at perhaps 10 to 25 volts beyond which the current suddenly rises to a rather high and constant value determined by the external resistance R_b and the voltage E_b, according to Ohm's law. Increasing the voltage beyond the critical value will increase the current as calculated on the basis of Ohm's law, taking account only of the resistor R_b and neglecting the tube resistance. On the basis of this operation we conclude that, after the critical voltage has been reached or exceeded, the internal resistance of the gas tube had suddenly decreased to an extremely small value from its previous value of several hundred or several thousands of ohms. The relatively large current will continue to flow in R_b until E_b is reduced to a fairly low value, when the current will suddenly decrease to a negligible value.

This operation of a two-element tube indicates that it can be used as a voltage control switch. The smooth type of voltage-current control possible with vacuum tubes has now been lost and for most practical purposes the tube can be used to conduct current on an all-or-nothing basis.

If we place a control type of gas tube in a blue box with the grid and cathode connected to the input terminals and the plate or anode and cathode connected to the output terminals, the operation becomes more complicated. Let us apply steady voltages to the input and output circuits and measure the input and output currents as these voltages are varied. Again, at a given grid voltage the tube suddenly conducts at some critical value of positive plate voltage. Likewise, for a given positive plate voltage, the tube suddenly conducts at some critical grid voltage. The breakdown now depends not only upon the magnitude of the plate voltage but also upon the magnitude of the grid or input voltage. Over a considerable range of values the critical grid voltage which initiates conduction is some fairly definite fraction of the applied plate voltage. This critical grid voltage may be either positive or negative, depending upon the type of tube within the box. It will also be observed when the plate circuit of the tube becomes conducting that there is also a relatively large input or grid current flowing, even though the grid of the device is negative.

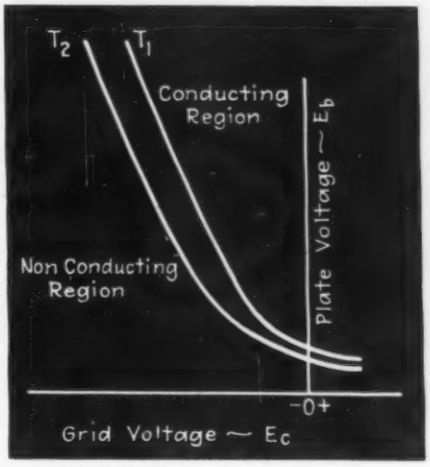

Fig. 7—Voltage control characteristics for gaseous control tube, for two different operating temperatures, T_1 and T_2

Thus, before the critical grid voltage is reached the input resistance of the tube may be fairly high but beyond the critical grid voltage it becomes relatively low. Thus, the "switch action" observed in the output circuit is also apparent in the input circuit and it will be observed that both input and output current increase simultaneously. If the tube contains mercury vapor, it will be found that the critical grid and plate voltages also depend somewhat upon the temperature at which the tube is operated.

It is convenient to plot the grid and plate voltages for the condition at which the tube suddenly becomes conducting. Such a set of curves (Fig. 7), divides the tube characteristics into two essential regions. For those conditions of voltage occurring to the left of curve, the tube is nonconducting and no appreciable current will flow through it. On the other hand, if the voltages occur to the right of the curve, the tube becomes conducting and passes a current which is limited only by the external load and by the ability of the cathode to supply electrons. Thus, Fig. 7 may be regarded as a type of "trigger diagram" to indicate the conditions under which the tube conducts. Once the gas within the tube becomes conducting the grid loses control and the tube can in general, be made non-conducting only by removal of plate voltage. The region between the various curves depends upon the ambient temperature of the tube surroundings.

For an appreciable portion of the curve of Fig. 7, a linear relation exists between the grid and plate voltages which produce breakdown. For a given temperature, the ratio of the plate voltage to the grid voltage required to initiate ionization is called the control factor. It is analogous to the amplification factor in the high vacuum grid tube, and is determined in much the same way. For gaseous conduction tubes there are no significant coefficients analogous to the transconductance and plate resistance of the vacuum tube.

When the gas within the tubes becomes ionized gaseous tubes have much lower internal resistance than vacuum tubes. Consequently greater currents may be passed through them than through vacuum tubes of equivalent structure. However, for gas or vapor tubes having pressures of a fraction of a millimeter, the maximum obtainable current is equal to the current which the cathode can supply. On the other hand, tubes containing gas or vapor at a pressure of about 5 centimeters of mercury can rectify currents of larger magnitude than the cathode emission current since the pressure of the gas tends to prevent excessively rapid evaporation of particles from the cathode. Such tubes are suitable for use only in low voltage circuits such as battery chargers.

In large industrial rectifiers, a mercury pool is frequently used instead of a hot cathode, and conduction takes place by virtue of a mercury arc between the pool and the anodes, of which two are required to maintain the device in continuous operation. Such mercury vapor rectifiers are often encased in metal tanks.

TABLE II — OPERATING CHARACTERISTICS OF TYPICAL GAS TUBES

Type No.	Description	Heater Voltage Volts	Heater Current Amps	Plate Peak Volts	Max. Av. Plate Amps	Max. Peak Plate Amps
	Diodes					
866	Half Wave Rect.	2.5	5.0	7,500	0.25	1.0–2.0
869	" " "	5.0	18.0	20,000	2.50	10
870	" " "	5.0	65.0	16,000	75.0	450
WL-670	Full Wave Rect.	2.5	24.0	1,000	9.5	.3 per anode
	Triodes					
885	Negative Grid	2.5	1.4	350	0.075	0.300
FG-17	" "	2.5	5.0	2,500	0.50	2.0
GL-414	" "	5.0	20.0	2,000	12.5	100
KU-634	" "	5.0	11.5	7,500	1.25	5.0
KU-610	Positive Grid	2.5	6.5	500	0.10	0.40
	Tetrodes					
FG-98A	Negative Grid	2.5	5.0	500	0.5	2.00
FG-154	" "	5.0	7.0	500	2.50	10.0
FG-95	" "	5.0	4.5	1,000	2.50	15.0
FG-172	" "	5.0	10.0	1,000	6.40	40.0

Instead of providing the source of electrons by means of a hot cathode, they may be provided by a cold cathode with electrons supplied by field emission. Two and three element tubes of this variety are available. Of course, such tubes would not require any cathode heating battery if connected to the circuit of Fig. 1.

The igniter principle, long used in mercury vapor rectifiers, has been applied to the ignitron. The ignitron is a gas discharge tube having a pool type cathode in which an ignition electrode is employed to control the starting of the unidirectional current flow in each operative cycle, the igniter electrode initiating the conducting arc. The ignitron has important applications as a rectifier for industrial uses.

All gas or vapor filled tubes are incapable of giving instantaneous control of current, but are capable of controlling the desired average current. Consequently, they are given average current ratings. Operating characteristics for several typical gas tubes are given in Table II.

Characteristics of Phototubes

Another electron tube of very great industrial use is the photoelectric tube or phototube. Let it be placed in a white box. It has no terminals marked heater nor has it any input terminals. It does have output terminals but where the input terminal should be, there is nothing but a piece of plane glass, or perhaps a magnifying glass. The interior of the box is completely dark.

We connect up the device as shown in Fig. 8, duplicating the connection of Fig. 1 so far as the output terminals are concerned. If B_2 is positive with respect to B_1 we find that a small current may flow, but if the polarity is reversed, no current flows.

A casual examination of the characteristics of the device with the terminal B_2 positive with respect to B_1 results in values of output current which, while they depend upon the value of the output voltage, E_b, at first do not appear to be constant. Instead they appear to vary more or less at random, even being subject to our proximity to the white box. A closer examination will show that these current variations are associated with the amount of light falling upon the glass or lens of the input circuit. By following out this line of reasoning, we find that the output current is a function of the light incident upon the lens. We have now a totally new type of device in which the output current depends upon (1) the plate voltage, if the light intensity is constant, or (2) the light intensity if the plate voltage is constant.

Suppose we maintain a steady beam of light on the lens of our white box and observe the current as the voltage is changed. Since the maximum current which we can obtain is in the neighborhood of 25 microamperes or so, we conclude that the output of the device is of extremely high impedance, especially since the voltage E_b may be as high as several hundred volts. In general, the characteristic we obtain is one which rises quite sharply for low values of voltage and then, for increased voltages, results in no appreciable increase in current. This is a typical saturation curve. If the tube is a vacuum device, then the current will be essentially constant for voltages above about 50 volts, but if the tube contains gas, we shall find that the current continues to rise concave upward as the voltage is increased. These characteristics are shown in Fig. 9 for both tubes.

If the voltage is maintained constant above the knee or saturation value and the light intensity is varied, it will be found that the current is directly proportional to the intensity of the light beam so long as the external plate resistance, R_b does not have too high a value. Even for a load resistance of 1 to 2 or perhaps 5 to 10 megohms there is a reasonably good linear relationship between output current and incident light, but not for higher resistances. This linear relationship holds true only for vacuum phototubes as shown in Fig. 10. If a gaseous phototube

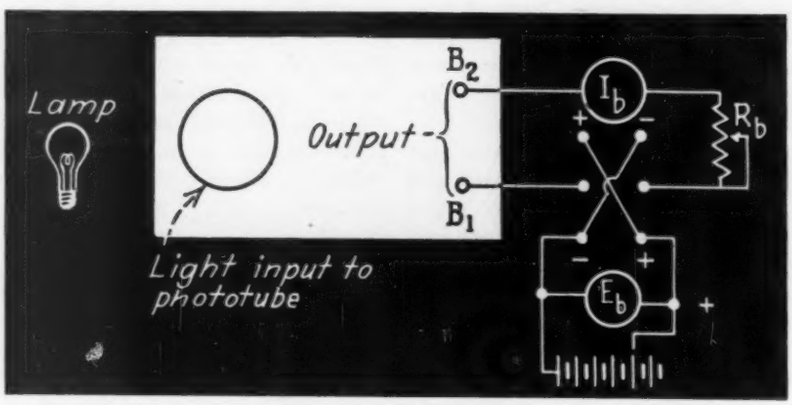

Fig. 8—Schematic diagram for determining the luminous sensitivity and electrical output characteristics of an emissive phototube. By omitting the voltage source, E_b, the same circuit could be used to determine the characteristics of barrier layer types of photoelectric cells

is used, the relationship between output current and input light is not linear, but may increase concave upward as the light intensity is increased. This immediately suggests to us that a vacuum phototube provides a very simple and convenient means for determining light intensity by electrical means. The gaseous tube is not so convenient because the relationship between input light and output current is not linear (Fig. 10).

The output current is also a function of the wavelength of light falling upon the device. Certain types of phototubes are sensitive to infrared radiation, some are sensitive throughout the visible range, whereas others (in fact practically all of them) have an appreciable sensitivity in the ultraviolet region. The relative sensitivity of the phototube to various wavelengths will be found to be a characteristic of the tube under consideration. Nevertheless, the fact that the phototube is differentially sensitive to radiation of different wavelengths indicates that the composition of the light reaching the tube must be maintained constant if we are to use the phototube as a precise light measuring instrument.

When we consider the magnitude of the current derived from the phototube and when we consider its resistance, it is apparent that the external load circuit must have a very high resistance (megohms) if maximum power is to be derived from the phototube. Even then the power available in the external circuit is extremely small. However, we may apply the output voltage developed across the resistor R_b to the input of a vacuum tube to control power in the output circuit of the vacuum tube. In this way, we can use the phototube indirectly to control sizeable amounts of power by variation of the light beam falling upon the phototube.

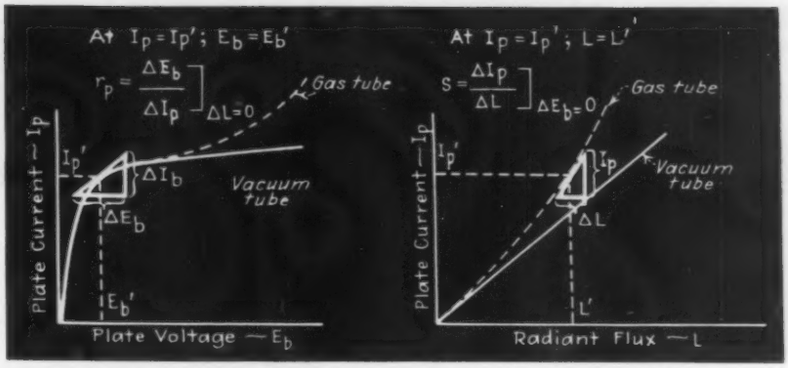

Fig. 9—Resistance or output characteristics of vacuum or gaseous phototubes may be determined from the slope of the E_b-I_p characteristics, left.

Fig. 10—The luminous sensitivity of vacuum or gaseous tubes may be determined from the slope of the current-flux characteristic, right.

As shown in Fig. 9 and Fig. 10, there are two characteristics of phototubes which are important. The first of these is called the variational resistance of the phototube and is defined as the ratio of the change in plate voltage to the corresponding change in current, for a specified incident light flux falling on the tube. The graph of Fig. 9 shows this resistance determined for the knee of the curve, but it could also be determined for any other part of any of the curve. The other tube characteristic is its luminous sensitivity which, for a specified plate voltage, may be defined as the ratio of the change in plate current to the corresponding change in luminous flux producing it. For the vacuum phototube this luminous sensitivity is constant, whereas it increases with increasing illumination for the case of a gaseous phototube. In all of these specifications for phototube factors, it is assumed that the quality of the light used in making the measurements is unchanged. The measurements are usually made with light produced by an incandescent filament operated at some specified temperature near 2,700 or 2,800 deg. F. Operating characteristics for a few typical phototubes are given in Table III.

Another type of photoelectric device, which incidentally can hardly be classed as an electron tube, is of importance in industrial applications of electronic devices. This is the barrier layer type of photoelectric cell which has considerable application in portable photographic exposure meters and light meters. This cell requires no external source of voltage for its operation but converts radiant energy directly into electric energy. The device is essentially a low impedance circuit element, and for this reason the output voltage, which is in the neighborhood of millivolts, cannot be conveniently amplified through the use of electron tube amplifiers. Currents of several hundred microamperes (enough to operate sensitive relays) are available from these devices, whose great virtue is that they operate without external sources of power applied to them. In many types of such devices, the spectral response is more nearly like that of the eye than is true for the emissive type of phototube already described. This type of light-sensitive device has many uses.

TABLE III — OPERATING CHARACTERISTICS OF TYPICAL PHOTOTUBES

Type No.	Cathode Surface	Max. Anode Voltage Volts	Max. Anode Current μA	Typical Sensitivity μA/L	Window Area Sq. In.	Region of Max. Sensitivity
	Vacuum Tubes					
PJ-22	Cs-O-Ag	200	20	5	0.9	Deep red & ultraviolet
SR-50	Cs-O-Ag	500	20	15	1.1	
917	Cs-O-Ag	500	30	20	0.9	3,000-11,000
CE	Cs-O	90	20	30	...	A deep red & ultraviolet
5A	Cs-O	180	100	20	...	
GL-441	Coesium	200	...	45	0.9	.....
	Gas Tubes					
PJ-23	Cs-O	90	20	50	0.9	Deep red & ultraviolet
918	Cs-O-Ag	90	5	110	0.9	3,000-11,000
CE	Cs-O	90	20	150	...	Deep red & ultraviolet
6-A	Cs-O	90	10	60	...	.....

Characteristics of Cathode-ray Tubes

In line with our previous investigations let us determine the characteristics of a cathode-ray tube. We shall find that the cathode-ray tube box contains a number of input voltage terminals and that in place of the output terminals we are faced with a circular glass disk (screen) having a white appearance as if the inner surface were frosted. From our study of phototubes we have already been accustomed to electron devices which convert energy from one type to another. We surmise therefore that electrical energy fed into the device may be converted into radiant energy manifested by light of various intensities on the glass screen. We note that the cathode-ray box is marked to be connected to a 110-volt a-c line and from this, as well as from the fact that the box is quite heavy, we infer that the box contains more than the tube itself. In fact, there is an internal power supply provided for the tube and the three pairs of output terminals are simply provided to enable us to control the pattern on the screen.

We begin our investigation by applying voltages to the two terminals marked control grid. If we apply a direct voltage, a spot of light appears in the center of the screen. By varying the control voltage we have a means of varying the intensity of the light on the screen. The current taken by the control grid is practically zero with one condition of polarity and fairly small with another so the impedance of this electrode is high.

Now, if we apply direct voltages to the two terminals marked *H*, we shall find that the spot of light is displaced in a horizontal direction across the screen in a manner which is proportional to the voltage applied to the *H* or horizontal terminals, the direction of the displacement depending upon the voltage polarity.

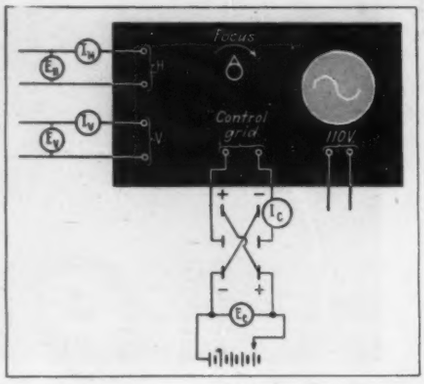

Fig. 11—Circuit arrangement for determining the intensity and deflection characteristics of a spot on the screen of a cathode-ray tube, in terms of intensity control voltage, E_c, and horizontal and deflection voltages, E_h and E_v, respectively

Likewise the vertical displacement of the spot depends upon the magnitude and polarity of the direct voltage applied to the two terminals marked *V* or vertical. The impedance of the *H* and *V* electrodes are both high as is indicated by very small currents I_H and I_V, even for voltages large enough to deflect the spot off the screen.

Now, we have three input voltages which we may control at random and independently of one another and therefore there are three possible modes of varying the spot. We can either vary the horizontal displacement of the spot or its vertical displacement and we can control its intensity. If we apply an alternating voltage to the vertical terminal and direct voltage to the horizontal terminal we shall find that the spot is lengthened out to a fine line whose length is proportional to the peak value of the voltage. If the direct voltage is applied to the vertical terminal and an alternating voltage applied to the horizontal terminal, the spot will become a thin horizontal line. If alternating voltages are applied to both the horizontal and vertical terminals, we obtain a wide variety of patterns which, if the frequencies are integrally related are known as Lissajous' figures. If we apply an alternating voltage to the control grid, then it will be possible, under certain values of adjustment, to make a portion of the Lissajous' figures disappear and to make other portions of the figures brighter than normal.

Using the three control voltages, it is possible to obtain a wide range of patterns of varying intensities on the screen. The patterns thus produced are extremely useful to one who is accustomed to their correct analysis.

The spot of light may be green in color or white or blue or perhaps some other, although less common, color. With different screen materials the image may not immediately remove itself from the screen when the control voltage is sufficiently negative. Instead, the spot tends to linger and to gradually decrease in intensity after the voltage is increased beyond its cut-off value. Such a tube would be well suited for the photography of a phenomenon which produces a stationary pattern on the screen, but would produce objectional blurring if our patterns were subject to rapid spatial changes on the screen of the tube.

For a given voltage applied to the *H* and *V* terminals, we always obtain the same spot displacement or deflection (assuming the line voltage and internal adjustments remain unchanged). It does not necessarily follow that a given voltage applied to the horizontal terminals will produce the same absolute value of displacement as when applied to the vertical terminals although usually the difference will not be more than about 20 percent. By determining the displacement of the spot for a given voltage we can specify the deflection sensitivity of the device.

In some tubes, using magnetic deflection, the deflection of the spot is controlled by current flowing through coils near the tube. In such cases the deflection depends upon the currents in the *H* and *V* coils whose impedance may be quite low. Otherwise the mode of operation is like that already described for tubes with electrostatic deflection.

The operating characteristics of a few typical cathode-ray tubes are given in Table IV.

For a list of bibliographical references relating to the material in this section, see page 69.

TABLE IV — OPERATING CHARACTERISTICS OF TYPICAL CATHODE-RAY TUBES

Type	Heater Voltage E_H (Volts)	Heater Current I_H Amps	First Anode Voltage E_1 (Volts)	Second Anode Voltage E_2 (Volts)	Approx. Sensitivity mm/volt or mm/NI	Screen Color	Screen Size
906	2.5	2.1	1,000	1,500	0.041	Green	3
1803-P4	2.5	2.1	1,900	7,000	.....	White	12
54-11-T	6.3	0.6	.....	3,000	.....	.....	5

Tubes and Their Functions

HAVING discussed the characteristics of various members of the electron tube family, let us consider the tube as part of a circuit. All high vacuum tubes have input impedances which are high (megohms) so long as the grid is maintained negative and this is the usual way of using the tube. The output impedances are high, of the order of thousands of ohms to several megohms. Both input and output impedances act like high resistances shunted by small capacitances. These capacitances may be neglected in all but unusual industrial applications.

Gas tubes have high input impedance up to the moment of conduction, and then the tube may draw appreciable current from the input circuit (milliamperes). The internal resistance of gaseous tubes is of the order of 15 to 25 ohms while the tube conducts and is very high during the non-conducting condition.

A high vacuum control tube may be regarded as a one-way device for all frequencies and applications useful to industrial processes. Very little of the output energy gets back to the input through the tube itself. The amplifier tube acts as a 180 deg.-phase shifting network for resistance loads. An amplifier tube operated over the linear part of its input-output characteristic may be looked at as a generator of voltage μe_g in series with the plate resistance of the tube; μ is the amplification factor and e_g is the applied alternating voltage.

A gaseous control tube acts as a single pole single throw switch. A phototube is an energy converter of high impedance, producing electrical energy from radiant energy. Microamperes of current can be secured from it; its output must be amplified for industrial purposes. The output of the vacuum type phototube is independent of applied voltage above about 50 volts. A linear relationship exists between input energy and output current for a high vacuum tube; but the relation is not linear for a gas phototube. The photovoltaic type of light sensitive device is essentially a low impedance device with higher current output than the phototube but delivering lower output voltages. Its output may be used with a sensitive relay which acts as an amplifier, in turn operating a heavier relay.

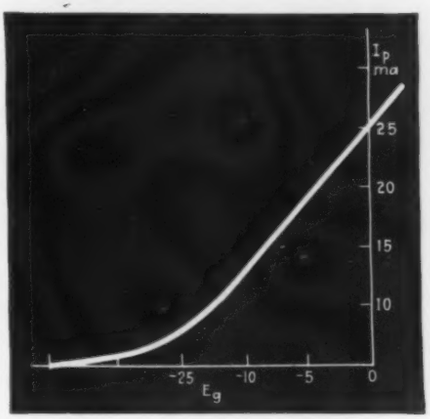

Fig. 1—Curve showing relation between input (grid) voltage, E_g, and output (plate) current, I_p, for a typical triode amplifier

How to Make the Tube Work

In industrial applications, tubes perform essentially two different types of functions. In some cases, as in rectifiers, the output of the tube is used directly, power flowing from the tube to the work to be done. In others, the tube acts merely as an accessory piece of equipment, responding to some sort of stimulus (obtained from the work to be done) and in responding releasing energy from a local source; this energy performing the desired job.

Whatever the job to be done, therefore, some means must be found for deriving from it a stimulus that can be applied to the tube, such as a voltage or illumination change. Interrupting a beam of light by an object to be counted is one method; another is to make the object to be counted change the voltage (phase, frequency or other electrical quantity) applied to the tube. Any physical quantity, such as weight, color, velocity, size; or any electrical quantity, such as voltage, phase, frequency; or any chemical quantity, such as the pH or conductivity of an electrolyte, etc., may be converted to an appropriate electrical change which will cause a tube to act.

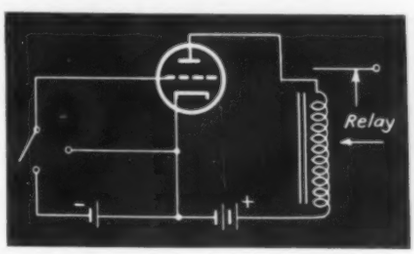

Fig. 2—Simple relay circuit using tube between a stimulus voltage and an electromagnetic relay

High Vacuum Tubes

Use of the Tube as a Relay

Consider the curve in Fig. 1, the characteristic of a typical amplifier tube. This curve expresses the relation between the voltage input and current output for a given plate voltage. Note that there is a continuous relation between current output (known as plate current or I_p and voltage input or grid voltage E_g). Thus when the grid voltage is —10 volts, the plate current is 13 milliamperes and when the grid voltage is zero the plate current has increased to 25 ma. In tubes of this type the plate current increases continuously as the grid voltage is made less negative or is made positive with respect to the cathode.

The plate circuit of the tube is the work circuit. The grid circuit is the control circuit. All that is necessary to put the tube to work as a relay tube is to change the voltage on the grid from say—10 to 0 and to use in the plate circuit an electro-mechanical relay which will remain open when 13 ma flow through it but which will close when 25 ma flow through it or vice versa. Current or power to perform the final work to be done is controlled by contacts on the relay. It is immaterial to the tube how the engineer decides to get the required input

voltage change of 10 volts. For example, an extremely simple method is to have a 13 volt battery between cathode and grid with a switch which can connect the grid directly to cathode when desired. This switch could be closed by a cam arrangement, say on a cylinder of a printing press. Once in each revolution the switch connects the grid directly to the cathode, and a counter in the plate circuit rings up another newspaper off the press.

A logical question at this point is to ask why, if 10 volts are available to control the tube, this voltage change is not applied directly to the relay and thus eliminate the tube. Certainly there is no need to use a tube if we can avoid it; and industrial engineers use tubes only if they perform jobs which cannot be done in any other way, or if they are done better by tubes—i.e., either faster, cheaper, or safer.

In this case it is power that operates the relay and not current or voltage. The 10 volt change placed upon the tube input terminals may come from a source of extremely limited power; for example the output of a phototube. The phototube current change may be of the order of 10 microamperes which is not sufficient current to operate the relay. This current, however, may be caused to flow through a 1-megohm resistance. Across this resistance will appear a 10-volt change and this in turn may be applied to the control grid of the tube.

The power through the relay may be figured as follows. If it has a resistance of 500 ohms, and if a current change of 12 ma is sufficient to make it operate, the power required to make the relay operate is 72.0×10^{-3} watts (I^2R). Now the input power required to make the tube operate works out to be 100×10^{-6} watts ($10^2 \times 10^{-6}$) so that the tube produced a power amplification of some 720 times—and this is why the tube is used.

Use of the Tube as an Amplifier

The tube has an extremely important ability—to amplify voltage changes placed upon its grid circuit. Across a load in the plate circuit appear voltages which are magnified images of the voltage changes placed upon the grid circuit. These images can be almost exact replicas of the input voltages, or they can be distorted in almost any manner desired. It is this amplification ability that has made radio broadcasting possible, and it is also of very great value to industrial applications.

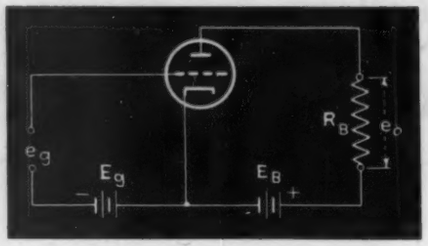

Fig. 3—Fundamental amplifier diagram. Here R_B is the load resistance across which the output alternating voltage, e_o, appears

In Fig. 3 is a simple tube amplifier circuit with a resistance load R_B. In series with the fixed grid voltage (known as a bias) is a source of alternating voltage. If the a-c terminals are shorted a steady value of plate current will flow, its value depending upon the plate voltage, upon the grid voltage, upon tube characteristics, and R_B. But if alternating voltage is applied to these terminals, the plate current will rise and fall about its former fixed value as a base. Looked at in another way, the plate circuit will have two currents in it, one a direct current and the second an alternating current.

This alternating current flowing through the plate load resistance produces a voltage drop along this resistance; and this alternating voltage will be greater than the alternating voltage placed upon the grid terminals if R_B is not too small.

Effect of Tube Resistance. The tube has an internal resistance (r_p) through which the plate current must flow. The relative value of this internal resistance and that of the load resistance govern both the magnitude of the alternating voltage developed across R_B and the power developed in R_B.

If the tube is properly biased and operated so that the plate current does not drop to zero on the negative half cycles of input alternating voltage, and the grid is always negative with respect to the cathode, the output alternating voltage, current and power are respectively

$$e_o = \frac{\mu e_g R_B}{r_p + R_B} \; ; \; i_p = \frac{\mu e_g}{r_p + R_B}; \qquad P_o = \frac{\mu^2 e_g^2 R_B}{(r_p + R_B)^2}$$

The maximum output voltage across R_B will be secured when R_B is large compared to r_p. The maximum power in R_B will be secured when R_B is equal to r_p. Then the power output is

$$P_{o\,max} = \frac{\mu^2 e_g^2}{4 R_B}$$

where e_g = rms input grid voltage or

$$P_{o\,max} = \frac{\mu^2 e_g^2}{8 R_B}$$

where e_g = peak input grid voltage.

Under no conditions can the amplification of voltage (e_o/e_g) be greater than the amplification factor of the tube and approaches this value only when R_o is much greater than r_p. If $R_o = 3r_p$ the amplification will be 75 percent of the amplification factor of the tube.

If the load resistance is much less than the tube resistance (as is frequently the case in using certain tubes with very high internal resistance) the voltage amplification is approximately equal to

$$e_o/e_g = g_m R_B$$

where g_m = transconductance of the tube, and here again the maximum amplification depends upon how large the load resistance is.

Plate Battery Requirements. It is a disadvantage to place too high a load resistance in the plate circuit of a tube, especially when using the low resistance tubes. This arises from the fact that the plate current not only flows through the tube but through the load too, and for every milliampere of current drawn

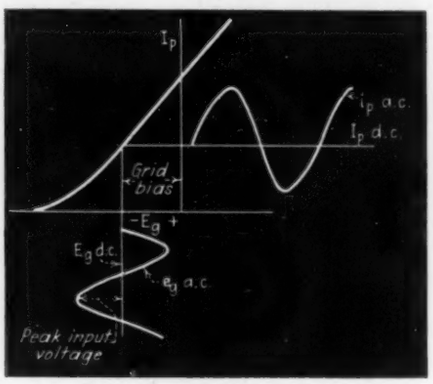

Fig. 4—Tubes usually operate with a fixed direct voltage on both plate and grid. In addition, alternating voltages may be placed upon the grid circuit. Then alternating currents will flow in the plate circuit. Here E_g and I_p are steady values of grid voltage and plate current; e_g and i_p are peak values of alternating grid voltage and plate current

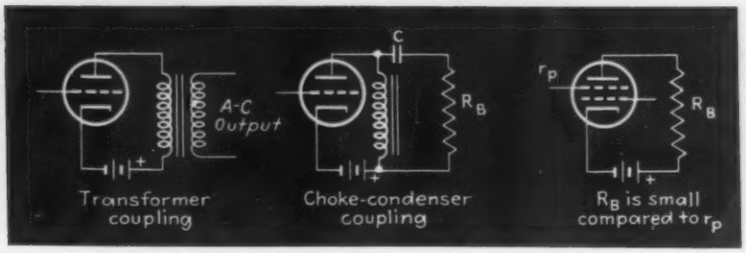

Fig. 5—Ways of avoiding use of high plate battery voltage with resistance loads. The resistance of the choke (center) is low, its inductance high

through a thousand ohms of resistance, 1 volt is lost—it does not appear across the cathode-plate path. Thus if 10 ma flow through 10,000 ohms, 100 volts appear across R_B. If the tube requires 250 volts across the resistance of the tube and if 100 volts are lost across R_B, the plate battery must supply 350 volts.

It is worth noting here that there is but a single source of voltage in the plate circuit—the plate battery. Current from this battery flows through the tube and through the load resistance. The way in which the total plate circuit voltage divides, part appearing across the tube and part across the load, depends upon the relative resistances of the tube and the load but the sum of the two voltages is never greater than the plate battery voltage. When the voltage drop across the load is high due to high plate current, the voltage across the tube is low and vice versa.

Use of high resistance loads which cause large voltage drops which must be supplied by high plate battery voltages can be avoided by: (1) use of a transformer between the tube and the load so that the desired a-c power is developed in the load without the steady plate current having to flow through it; (2) use of a low-resistance inductance through which the direct current flows as in Fig. 5; (3) use of tubes of high intrinsic plate resistance with loads which have resistances lower than that of the tube. Then the tube acts more or less like a constant-current source and variations in load voltage with consequent variations in plate voltage are much less important.

Tube Efficiency. If $R_B = r_p$, the efficiency of the plate circuit is 50 percent since half the power developed will be lost in the tube and half will be usefully developed in the load resistance. Greater efficiency can be had by raising the value of R_B, but less power will be secured thereby unless the plate voltages and currents are increased.

The amount of power that a tube can deliver depends upon how much it can safely dissipate on its own plate and its efficiency of operation. A tube that can safely dissipate 10 watts can also deliver 10 watts to a load at 50 percent efficiency; but at higher efficiencies, higher power can be developed in the load without raising the 10 watt limit in plate dissipation.

In most industrial cases, it is more important to get the maximum power into a load (such as an electro-mechanical relay) rather than to achieve efficiency and in this case the load must be adapted to the tube or vice versa. This means that the resistance of the load should approximate the resistance of the tube. The reduction in power is not very great if the load resistance is greater than that of the tube by 2 or 3 times, but considerable loss occurs if R_B is very much less than r_p.

Where maximum voltage output (contrasted with maximum power output) is desired, R_B must be high compared with r_p if possible. This is not possible with pentode tubes and here R_B should be as high as possible or convenient.

Tubes in Parallel or Push-pull. If more output is desired than a single tube will deliver, two or more of them may be operated in parallel. Under these conditions the effective internal resistance of the tube part of the circuit goes down; and if one

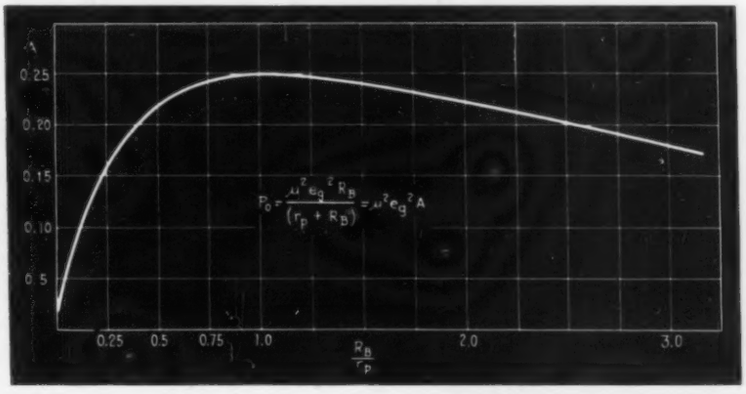

Fig. 6—Power output from an amplifier tube depends upon the relative values of the internal tube resistance, r_p, and the load resistance, R_B. Maximum power output occurs when R_B is equal to r_p

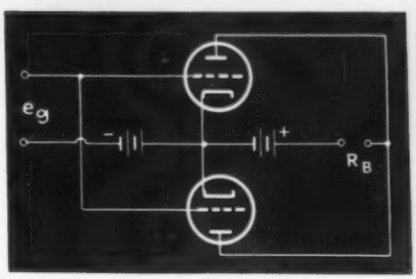

Fig. 7—Use of tubes in parallel to increase output over that obtainable from a single tube

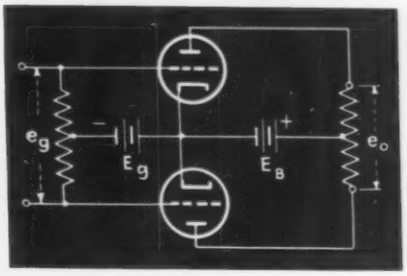

Fig. 8—Push-pull arrangement of tubes decreases harmonic content of output and increases power output over that obtainable from a single tube

tube will deliver 10 watts, two of them will deliver 20 watts—if the output circuit is appropriately changed to take account of the decreased tube resistance.

It is often more economical to use two or more tubes in parallel than using a single tube of greater output power.

Tubes may also be operated in push-pull. More power output may be secured; but the big advantage is the fact that the waveform of the output can be made to resemble more closely the waveform of the original. This is not a matter of great importance to industrial applications, except in unusual cases.

Tubes can also be connected with their grids in parallel and plates in series or with grids in series and plates in parallel.

Use of Tube as Generator. Because a tube will amplify, it will also generate alternating currents from direct currents. A voltage applied to the grid of the tube results in a larger voltage appearing in the output. If a part of this output is fed back into the input in the proper phase, this portion of the input will reappear in the output in amplified form. If the amount of energy fed back is sufficient to overcome all the losses in the input circuit, it will be found that the initial driving voltage applied to the tube from an external voltage supply may be eliminated and the tube will continue to develop power in the load. In practice no external exciting grid voltage need be applied to start oscillations since any small instability (such as mechanical, thermal or electrical change) will set the circuit into oscillation.

Fig. 9—Simple half-wave single-phase rectifier comprising anode and cathode only. Output load is in series with anode

The tube is now acting as a generator, the frequency of the generated power depending upon the inductance, capacitance and resistance of the circuit elements attached to the tube. The amount of power developed in the load depends upon the tube, the voltages used and the load characteristics.

Alternating currents of practically any frequency, of practically any waveform, or of any power may be produced in this manner. Direct potentials need to be applied to the tube, some sort of energy feedback from output to input must be provided, and as a result alternating currents will be produced.

Tubes can be made to generate oscillations in other ways (dynatron, Barkhausen oscillators, etc.) but these methods are not used industrially at the present time.

Tube as a Frequency Converter. Suppose a tube has two grids and that voltages of different frequencies are placed upon these grids. Now if the plate circuit can be explored with some sort of frequency discriminating detector, two (or more) frequencies will be discovered. If there exists a linear relation between each grid and the output, only the two input frequencies will be detected; but if any non-linearity exists between the input and output, or in the output E_p-I_p curve, then the detector will indicate not only the original input frequencies but others as well. Among the new frequencies found may be the sum and the difference of the two input frequencies.

This is known as frequency conversion, since we convert two originating frequencies into other frequencies with totally different values. This is the principle of the superheterodyne radio receiver; but the principle has some application to laboratory and industrial problems as well. The two voltages can differ widely in frequency or can be alike or very nearly alike in frequency. One can be variable and the other fixed so that a variable frequency, differing from either originating frequencies, can be secured from the converter.

Modulation. If a high frequency and a low frequency are "mixed" properly, the high frequency will act as a carrier for the lower frequency (as in radio or carrier telephone communication). This process is called modulation and can be performed by varying the amplitude, the phase or the frequency of the carrier by the modulating frequency.

Conversely, if two frequencies have been mixed, they can again be separated by going through an inverse process. Thus from a modulated carrier, the modulating frequency can be secured and put to whatever use is desired.

Other Tube Functions. High-vacuum control tubes can also be used as frequency multipliers or dividers to deliver to a load higher or lower frequencies which may or may not be integral multiples of the originating frequency. The number of the output frequencies is practically unlimited.

When properly associated with other circuit elements, the tube can be made to perform an extremely wide variety of useful functions. For example tube circuits can be made to count impulses occurring

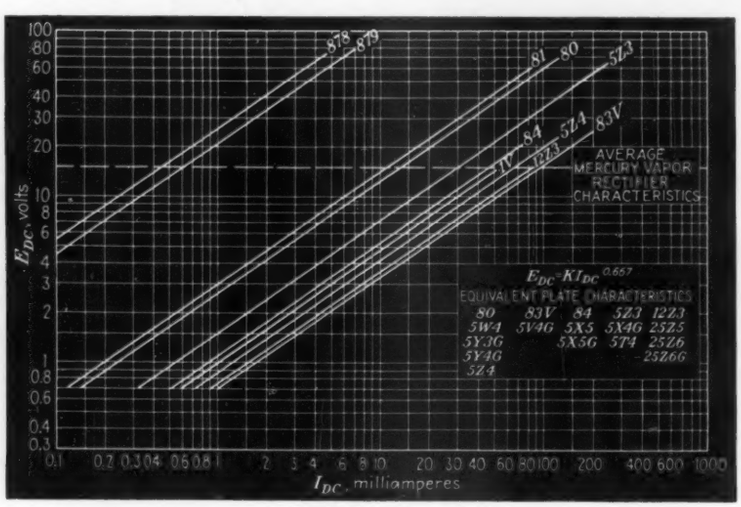

Fig. 10—Current-voltage characteristics of typical rectifier tubes. Current output is proportional to the 3/2's power of plate voltage

much too rapidly for any mechanical counter, to differentiate or integrate mathematical expressions descriptive of electrical, mechanical or other phenomena, can be used as a variable reactance and is widely used through laboratory practices as a measuring tool.

High Vacuum Tube Limitations. The high vacuum tube is a low current-high voltage device. If high currents at low voltages are desired, some other means must be used. Since the tube amplifies, and since a considerable amount of amplification can be secured with a single tube and its accompanying apparatus, care must be taken that the grid or input circuit has impressed on it only the desired voltages and that it be protected from stray fields, such as power line fields, etc. Since the output is a function of the plate voltage, the plate voltage must be steady if a steady output is necessary. If the tube is to amplify (and not to generate oscillations) care must be taken to see that none of the output voltage is allowed to get back into the input circuit in phase with the input voltage.

Rectification

Since the tube conducts current only when its plate is positive with respect to the cathode, an alternating voltage placed between a tube and a load will cause current to flow through the load on the half cycles when the plate is positive. On the half cycles of the alternating voltage when the plate is negative with respect to the cathode, no current will flow in the load. The tube acts as a one-way switch or like a check valve in a pump. This tube phenomenon is called rectification. Only two electrodes are necessary—a cathode to supply electrons and a plate to collect them.

There are two kinds of rectifier tubes, high vacuum tubes and gas tubes. Some rectifiers have control grids in them so that control over the output current is possible. These will be discussed below.

Half-wave Rectifier. In this case a single tube is used and only one half of the a-c cycle is rectified. Current flows in spurts through the load. If continuous current is desired through the load, the output of the rectifier may be put through a filter and then into the load. The filter smoothes out the spurts of current so that the load current resembles that from a d-c source.

The half-wave single-phase rectifier is simple and inexpensive. Its output is relatively difficult to filter and is seldom used.

Full-wave Rectifier. In this case two tubes are used (or a single tube with two sets of elements) and both halves of the a-c cycle are rectified, each tube conducting current when its anode is positive and remaining non-conducting while the other tube conducts. Output from this rectifier is relatively easy to filter and is widely used where currents of 1 ampere at 1000 volts or less are desired.

When a half-wave rectifier works directly into a resistance load without any intervening filter circuit, the average current passed through the load is

$$I_{av} = \frac{0.45\,(V_{rms}) - V_{drop}}{R_L}$$

where V_{rms} is the rms voltage across the power transformer secondary terminals, V_{drop} is the voltage drop across the rectifier tube, for the average current passing through the tube, and R_L is the resistance of the load. V_{drop} is obtained from Fig. 10.

When mercury vapor rectifiers are used, V_{drop} is about 15 volts and is independent of the current drawn from the tube.

In full-wave circuits, the average current is twice that given by the half-wave equation. In this case V_{rms} is the rms voltage between the center tap and one end of the transformer secondary.

$$V_{av} = I_{av} R_L \text{ volts}$$

Polyphase Rectifiers. In polyphase circuits, half- or full-wave rectifiers may be provided for each phase. Such polyphase rectifiers are of considerable industrial application where high power direct current is to be obtained. The output from polyphase rectifiers is often used without filtering, although if filtering is required, this can be carried out relatively easily because the output voltage is relatively high throughout the cycle and because the frequency components to be filtered are higher multiples of the supply frequency.

Voltage Doubler. In this circuit two rectifier units are used. The output voltage is approximately

TABLE I — RECTIFIER CIRCUITS

	Circuit A	Circuit B	Circuit C	Circuit D	Circuit E
Average d-c volts, E_a	0.45 E_{rms} 0.32 E_{max}	0.90 E_{rms} 0.64 E_{max}	1.07 E_{rms} 0.83 E_{max}	1.07 E_{rms} 0.83 E_{max}	2.32 E_{rms} 1.65 E_{max}
Peak volts across tube	3.14 E_a	1.57 E_a	2.09 E_a	2.09 E_a	1.05 E_a
Secondary kva*	1.57	1.11	1.48	1.48	1.05
Primary kva*	1.11	1.11	1.21	1.05	1.05
R-m-s ripple, % of E_a	48	48	18	4	4

Note: Drop through rectifier tubes neglected.
* Per kw power delivered to load, transformer losses neglected.

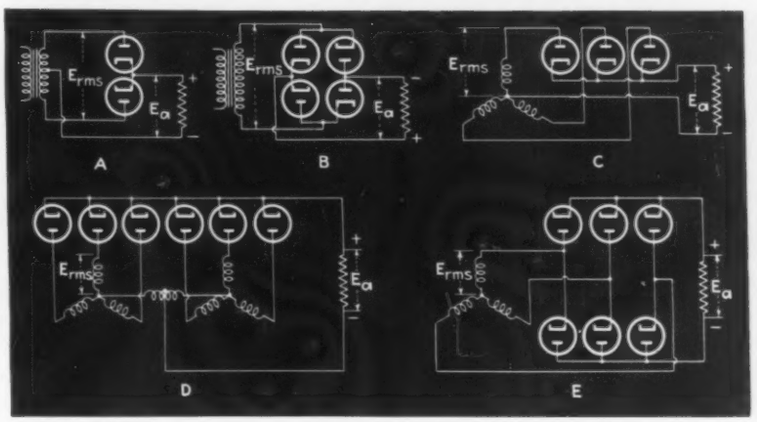

Fig. 11—Several rectifier circuits including. *A*, full-wave single-phase circuit; *B*, bridge arrangement; and *C*, *D* and *E*, polyphase circuits

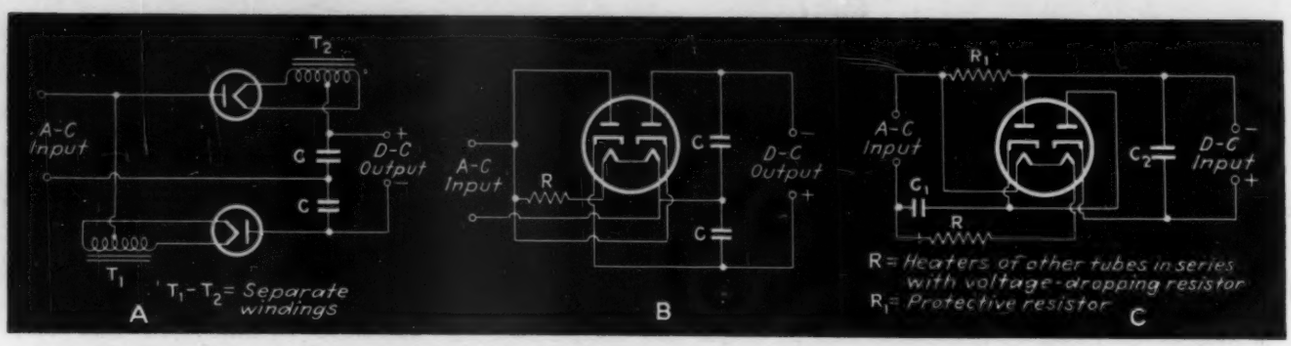

Fig. 12—Voltage doubler circuits. In *A*, separate filament transformer windings are necessary. This circuit is called a full-wave doubler because each tube conducts current to the load on each half of the a-c input cycle. In *B* and *C* both tubes are placed in a single bulb. In *B*, the d-c load cannot be grounded or connected to one side of the a-c supply line. *C* gets around this difficulty but is a half-wave rectifier since rectifitd current flows to the load only on alternate half cycles of the a-c input cycle

twice the alterating voltage supplied to the rectifier. This is because each condenser (Fig. 12) is charged to the full voltage delivered by the transformer but since the two condensers are in series the total voltage across them is twice that across either.

The voltage doubler is often used where voltages of about 250 are to be obtained from the 110 volt a-c line in the most economical manner. Voltage is fed to the tubes directly from the power line, no transformer being needed. Economy is the reason. This rectifier is also employed in x-ray work where a single tube cannot deliver the required direct voltage output.

Filters for Rectifiers. The smoothing circuits, known as low pass filters, consist of series inductances (or resistance when the current output is small) and shunt capacities. These series and shunt elements tend to maintain the voltage across the output and the current through the output constant, independent of the spurts of current as supplied by the tube. With sufficiently good filtering the output from the filter can be as free from ripple as desired.

Rectifier Applications. The obvious use for a rectifier is to supply direct current from an a-c source. A rectifier, however, can perform other functions than as a source of direct-current power. For example, a d-c meter in the plate circuit of a rectifier will read a current which is some function of the alternating voltage applied to the tube. Thus the tube may be calibrated as an a-c voltmeter by merely placing various known alternating voltages on the tube and noting the rectified current that passes through the meter.

Gaseous Tubes

If a gas, or a vapor such as mercury vapor, is admitted to the tube after all other gases have been pumped out, the characteristic of the tube changes radically. This change in characteristic requires certain changes in the way the tube is used, and enables the tube to perform functions not possible with vacuum tubes.

Gas tubes either conduct or they do not conduct—there is no smooth control of current from zero to the maximum value as is true with high vacuum tubes. When conducting, the voltage drop across the tube is fairly low (15 to 25 volts), fairly constant and independent of current taken from the tube. The current output is limited only by the output load and by the ability of the cathode to supply electrons. Very much higher currents may be supplied by gas tubes than by high vacuum tubes.

Proper Operating Conditions. Since the current during the conducting period is often very high, the cathode may be injured unless means are taken to prevent too great a current flow in case the load should be short circuited. Such means can be a resistance in series with the tube and the load; or an overload circuit breaker or fuse, etc. Furthermore the tube should not be allowed to pass current to the load until the cathode is at the proper temperature. A time delay relay placed between the tube and the load serves this purpose.

Gas tubes are prone to cause radio interference; small inductances in series with the anodes and physically close to them will eliminate this trouble.

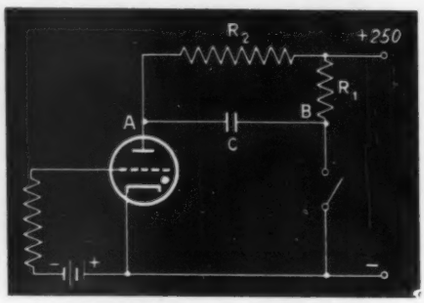

Fig. 13—Control of thyratron tube by suddenly lowering voltage of plate below point at which the tube will conduct

Control-type Gaseous Rectifiers

D-c Operation. Two or more grids in a gaseous rectifier make it possible to control the starting of conduction but not to control the stopping of conduction. In general the only way to stop the tube from conducting is to remove the plate voltage or make it negative. Furthermore a definite time is required for the grid to re-establish control after the plate voltage has been removed. This time is required for the ions to diffuse and leave the vicinity of the grid. This time is of the order of a few micro- or milliseconds and is known as the deionization time. This brief interval between removal of the plate voltage and the establishment of control by the grid limits the frequency of operations the gas tube can control.

In Fig. 13 is shown a simple method of controlling a gas tube. If d-c power is connected to the plate and cathode terminals, and if the

grid voltage is correct, anode current will flow. Removing or changing in any way the grid voltage will not have any effect upon the plate current. If, however, the switch is closed the tube will stop conducting.

When the tube conducts, the drop across it will be of the order of 15 volts. The rest of the line voltage, say 250 volts, is impressed across resistance R_2. Terminal A of the condenser is at the same voltage as the anode (15 volts) and terminal B is at line voltage (250) being charged through R_1. Now if the switch is closed, B becomes zero and terminal A will suffer an instantaneous drop in voltage equivalent to $-250 + 15$ volts or to the value of minus 235 volts. The plate has now, for an instant, become negative with respect to the cathode and conduction ceases. If the time taken to recharge the condenser through R_1 is greater than the de-ionization time of the tube, the grid will regain control and conduction will not start until the grid voltage is again the proper value.

R_1 should be high enough in resistance so that closing the switch does not blow the line fuses or circuit breakers.

If a glow tube (a tube with two elements in a gaseous atmosphere which conducts current only when a certain voltage is impressed across the elements) is placed across the switch terminals, the gas tube can be started and stopped intermittently. As soon as the condenser voltage becomes equal to the voltage at which the glow tube conducts, current flows through the glow tube, reducing the voltage across it sufficiently to cause the plate voltage to become negative. The gas tube goes out, de-ionization takes place, the condenser recharges and when the plate is again at a potential higher than that necessary to cause conduction (as controlled by the voltage on the grid) the tube conducts again, and the cycle is repeated. A 1-microfarad condenser and a 874 glow tube will cut off a 1-ampere current in an FG-67 tube.

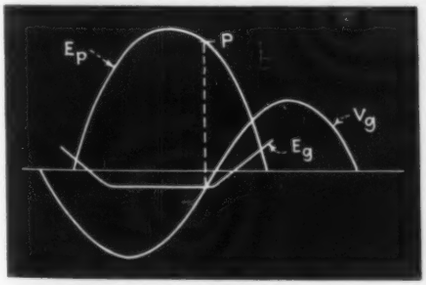

Fig. 14—Control of thyratron by alternating voltages. E_g is the voltage that must be on the grid to start current flow at the value of plate voltage immediately above it. V_g is the control voltage applied to tube. Where E_g and V_g cross, the tube will conduct or "fire"

A-c Operation. If direct voltage is placed upon the grid and alternating voltages upon the plate, conduction will take place whenever the proper relative values of grid and plate voltage occur. If the grid voltage is such that conduction occurs for any positive value of plate voltage, then current will pass through the tube on the entire half cycles which make the plate positive.

If, however, the grid is at such a potential that conduction will not occur at the highest positive voltage placed upon the plate (the peak value of the alternating voltage applied) then conduction will not occur in any part of the positive half cycle of alternating voltage.

Conduction can take place for all of the half cycle or any part of it or none of it, as desired; conduction can be prevented from taking place for all of the half cycle (180 deg.) or for 90 deg. or less than 90 deg., that is, if the tube conducts at all it will do so for 90 or more degrees of the half cycle.

Phase Control. A more elegant way to control the time in the cycle at which conduction begins, and therefore the portion of the half cycle during which conduction takes place is to use alternating voltages on both plate and grid. By adjusting the phase between these two voltages and their relative magnitudes, the average current flowing during a half cycle may be adjusted to any value from zero to the maximum corresponding to conduction for a full 180 deg.

Consider Fig. 14. Here E_p is the anode potential which can have any waveform, and E_g is the grid bias which will just prevent the tube from conducting at the value of E_p shown on the curve. V_g is a sine wave of grid voltage (other waveforms can be used). V_g may be moved along the time axis so that it can be moved into or out of phase with E_p. The tube will fire (conduct) at the earliest point in the cycle at which V_g *crosses* E_p; in the figure point P. By advancing the phase of the grid voltage with respect to the plate voltage, current can be made to pass through the tube for a longer and longer period until the entire 180 deg. is a conducting period. If the grid and plate voltages are out of phase, current does not pass at all. The average current flowing may be found from

$$I_{av} = I_{peak}\frac{(1 + \cos \phi)}{\pi}$$

where ϕ = angle at which tube starts to conduct.

A simple way in which this phase control can be effected is shown in Fig. 15.

The phase-shift method of control is the preferred method, and should be used where a continuous control of power is required. This method permits fixing the time of starting of anode current anywhere in the positive half cycle of anode voltage. The average value of the anode current may be controlled completely from zero to maximum. Some of the more usual methods of obtaining phase shift are (1) an induction phase shifter, such as a Selsyn motor on a polyphase source; (2) capacity-inductance-resistance bridge; (3) by combining two alternating voltages which are out of phase and by varying the magnitude of one of them; (4) by a saturable peaking transformer having a d-c winding and varying the amount of direct current (5) combining an alternating voltage, which is out of phase with the anode voltage, with a d-c bias voltage.

It is good practice to supply the grid with voltages considerably

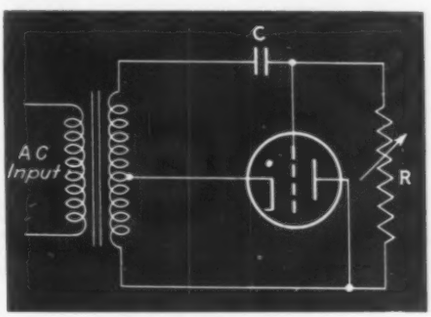

Fig. 15—Method of regulating phase between grid and plate voltages for controlling time in cycle when conduction starts

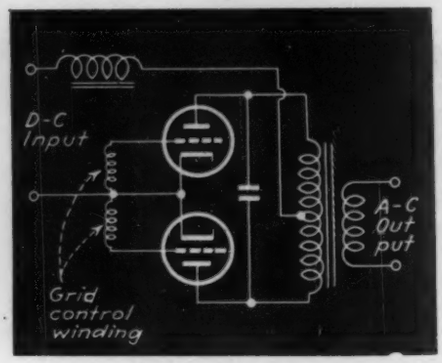

Fig. 16—Elementary circuit showing use of gas triode as an inverter—i. e., a tube which produces alternating currents from a direct voltage input. An actual inverter circuit would be more complex than this

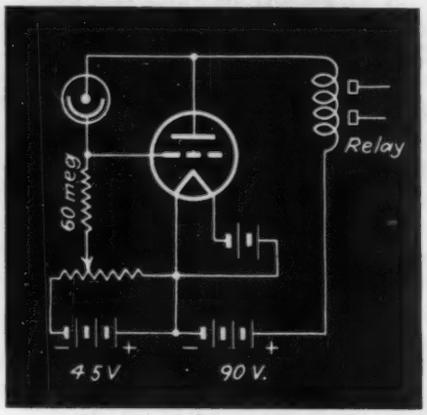

Fig. 17—Simple phototube-amplifier-relay circuit using direct voltages

greater than that just required to start conduction; this practice insures conduction when desired.

Inverter Service. Gas-filled tubes may be used also in tube inverter circuits for conversion of direct current to alternating current. As there are many types of inverter circuits, it is impossible here to do more than cover the fundamental principles.

In all such circuits direct current is applied to the anodes of the tubes and the grid is supplied with the desired frequency, either from an external exciter or by means of coupling with the output circuit. In this respect an inverter may be considered also as an amplifier or oscillator. The function of the tubes is to commutate or, in other words, to perform a switching operation. In all inverters some form of power storage is necessary to supply power during the commutation period, e.g., from static condensers, from a power system, or from rotating apparatus.

The fundamental action of inverters may be illustrated by the simplified, single-phase case of Fig. 16 although, in practice, the larger sizes are polyphase. The anodes of both tubes are positive. Let it be assumed that the grid of the upper tube is positive. Current will flow from the positive d-c source through the transformer to the negative d-c line by way of this tube. The grid of the lower tube is negative and allows no current to pass. The condenser is charged with the potential drop across the output transformer owing to the current flow in the upper half of the winding, the upper terminal of the condenser becoming negative, and the lower positive. Toward the end of the cycle the grids exchange polarity because of reversal of the exciting voltage. This action has no direct effect on the current flow through the first tube, but allows current flow through the second, which in effect connects the lower side of the condenser to the negative lead. This places a negative voltage of short duration on the upper anode, allowing the upper grid to regain control and terminate a half cycle of the a-c output. Corresponding actions in inverse order result in producing the following half cycle of a-c output.

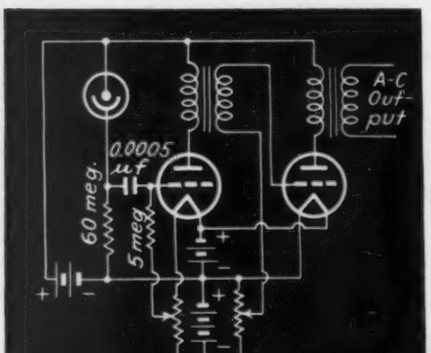

Fig. 18—Phototube circuit useful when alternating voltages secured from a modulated light beam are to be used

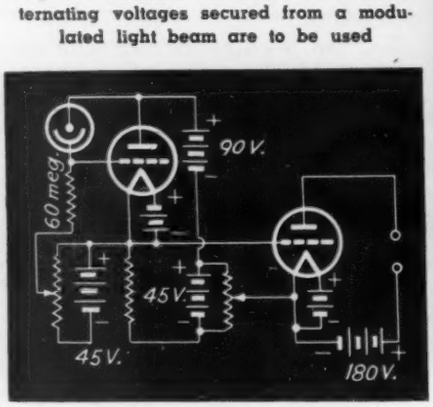

Fig. 19—Circuit useful in amplifying direct voltages. Voltage across resistor in cathode circuit of first amplifier is applied to the second amplifier

Phototube Applications

Phototubes can be used to initiate any electrical control desired by means of light impulses. If the linear relation between light intensity and current output is to be utilized (as in measurements), the tube should be operated with direct voltages; but if a relay is to be operated as a result of a change in illumination intensity (as for door opening, counting, etc.) alternating voltages may be used. In Fig. 17 will be found a circuit useful for d-c operation. Care must be taken to see that the maximum voltage rating of gas tubes is not exceeded.

In Fig. 20 is a typical a-c operated circuit. Since the output of the amplifier is pulsating direct current (rectified current), the relay will chatter unless a condenser is placed across its coil. The variable resistance between amplifier cathode and grid (through the phototube) provides bias; the sensitivity of the circuit may be controlled by varying the capacity of the grid condenser.

If modulated light impulses are to be employed, the circuit of Fig. 18 may be used. This is a straight transformer-coupled amplifier, the only difference being the phototube connection to the first tube. Where direct currents are to be amplified, Fig. 19 is satisfactory. Circuits amplifying direct currents are not as stable as when alternating currents are employed and are to be avoided if possible.

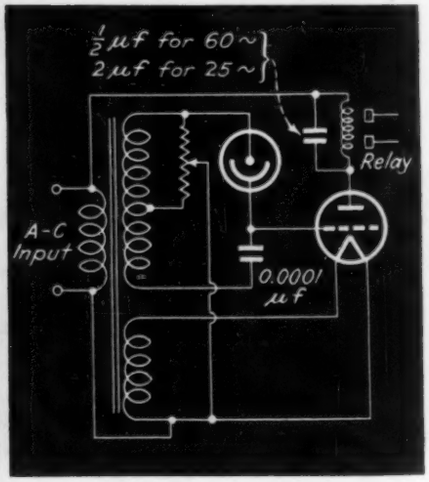

Fig. 20—Alternating current operated phototube relay. The tube rectifies the alternating voltage placed upon it: the voltage appearing across the condenser is then applied to the grid of the amplifier

Light-relay design. The amount of illumination change necessary to cause a tube to close an electro-mechanical relay may be found from

$$L = \frac{E_c}{SR_c} \text{ lumens}$$

Where L is the increment in light falling upon the phototube cathode, required to actuate the relay, S is the luminous sensitivity of the phototube in microamperes per lumen, R_c is the coupling resistance in megohms, and E_c is the increment in grid volts required to actuate the relay. The amplifier current increases if cathode of phototube is connected to the amplifier grid; decreases when phototube anode is connected to amplifier grid.

Cathode-Ray Tubes

Because of their ability to produce a wide variety of traces over a very wide range of frequencies, cathode-ray tubes are extensively used where visual comparisons of electrical operations are to be made, or where the voltages or currents in a circuit are to be examined. The phenomenon to be studied is applied as a voltage to one set of deflecting plates, usually the vertical plates, while some convenient standard of comparison, or a timing wave, is applied as a voltage to the horizontal pair of deflecting plates.

A fundamental circuit for the operation of the cathode-ray tube is shown in Fig. 21 for a tube having electrostatic deflection. This simple circuit is useful for the comparison of two voltages applied to the two pairs of deflecting plates, the image on the screen depending upon the relative magnitudes, frequencies, and phase displacements of the two voltages under comparison. This simple circuit is not suited for the examination of a single voltage or current as a function of time, since no timing wave is provided to form the reference axis.

Many types of sweep circuit generators can be used to provide suitable timing axes, the charging and discharging of a condenser through a gaseous tube forming a very simple and common method. The sweep circuit diagram of Fig. 22 is an improvement over the simple gas tube generators and provides a timing axis which is very convenient for the examination of recurrent phenomena.

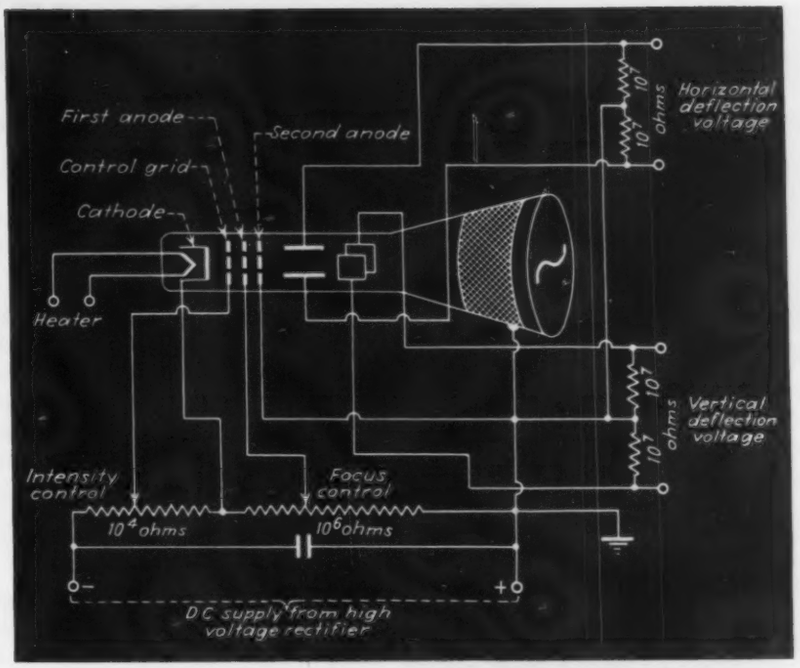

Fig. 21—Circuit arrangement of cathode-ray tube having electrostatic deflection

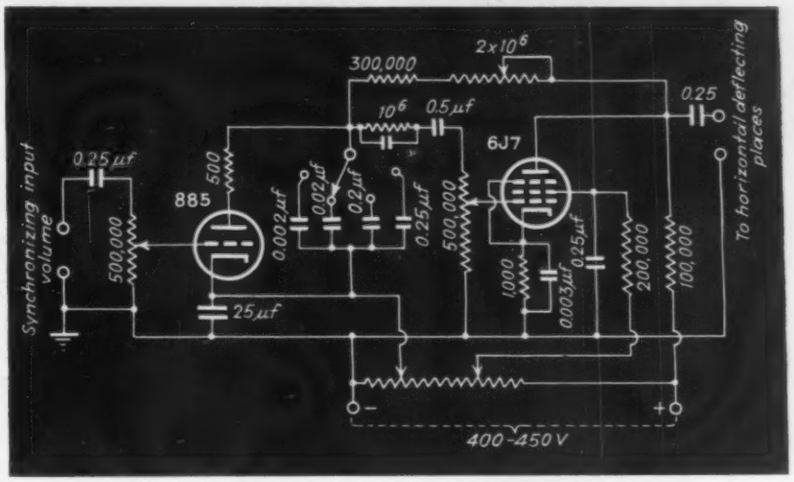

Fig. 22—Sweep circuit generator with amplifier for supplying a cathode ray tube setup with a time basis

BIBLIOGRAPHY

(1) Richardson, O. W.: "Emission of Electricity from Hot Bodies", Longmans, Green and Co., New York

(2) Reimann, A. L.: "Thermionic Emission", John Wiley and Sons, New York

(3) Allen, H. S.: "Photoelectricity", Longmans, Green and Co., New York

(4) Hughes, A. L. and DuBridge, L. A.: "Photoelectric Phenomena", McGraw-Hill Book Co., New York

(5) Millikan, R. A.: "The Electron", University of Chicago Press, Chicago

(6) Dow, W. G.: "Fundamentals of Engineering Electronics", John Wiley and Sons, New York

(7) Fink, D. G.: "Engineering Electronics", McGraw-Hill Book Co., New York

(8) Millman, Jacob and Seely, Samuel: "Electronics", McGraw-Hill Book Co., New York

(9) Koller, L. R.: "The Physics of Electron Tubes", McGraw-Hill Book Co., New York

(10) McArthur, E. D.: "Electronics and Electron Tubes", John Wiley and Sons, New York

(11) Chaffee, E. L.: "Theory of Thermionic Vacuum Tubes", McGraw-Hill Book Co., New York

(12) Reich, H. J.: "Theory and Practice of Electron Tubes", McGraw-Hill Book Co., New York

(13) Eastman, J. Y.: "Fundamentals of Vacuum Tubes", McGraw-Hill Book Co.

(14) Albert, A. L.: "Fundamentals of Electronics and Electron Tubes", MacMillan Co., New York

(15) Anderson, J. S.: "Photoelectric Cells and Their Applications", Physical and Optical Societies, London

(16) Campbell, N. R. and Ritchie, D.: "Photoelectric Cells", Isaac Pitman and Sons.

(17) Zworykin, V. K. and Wilson, E.: "Photocells and Their Application", John Wiley and Sons, New York

(18) Walker, R. C. and Lance, T. M. C.: "Photoelectric Cell Application", Isaac Pitman and Sons, New York

(19) Jolley, L. B. W.: "Alternating Current Rectification", John Wiley and Sons, New York

(20) Guntherschulze, A.: "Electric Rectifiers and Valves", John Wiley and Sons, New York

(21) Marti, O. K. and Winograd, H.: "Mercury Arc Power Rectifiers", McGraw-Hill Book Co., New York

(22) Prince, D. C. and Vodges, F. B.: "Principles of Mercury Arc Rectifiers and Their Circuits", McGraw-Hill Book Co., New York

(23) Henney, Keith: "Electron Tubes in Industry", McGraw-Hill Book Co., New York.

(24) Knowlton, A. E.: "Standard Handbook for Electrical Engineers", McGraw-Hill Book Co., New York

(25) Technical literature, General Electric and Westinghouse Companies.

(26) Pender, Harold and McIlwein, Knox: "Electrical Engineers' Handbook Vol. V", John Wiley and Sons, New York

Tubes At Work

Stimulus—ELECTRICAL

Carbon Arc Electrode Feed Control

THE LENGTH OF THE gap between the electrodes of a carbon arc operated on d.c. has a direct bearing upon illumination intensity, steadiness, formation of craters at the positive electrode and the rate at which carbons are consumed. Such arcs are more critical with respect to current density than to voltage across their electrodes, hence current variations may be employed as a source of energy to automatically adjust the arc gap for optimum performance.

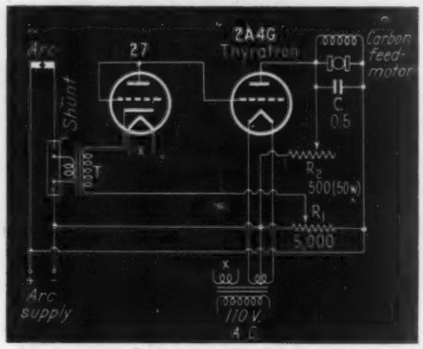

Carbon arc electrode feed control. Change in arc current acts to speed up or slow down the drive motor as carbons burn away and so automatically maintains the most efficient spacing

Where the source of d.c. operating the arc is pulsating in character, as from an unfiltered half-wave rectifier, the circuit shown provides suitable control. A heavy shunt having a value sufficient to produce 10 millivolts drop across the primary of transformer T is connected in series with the power supply feeding the arc. The secondary winding of T delivers 25 volts to the type 27 tube used as a diode rectifier and d-c voltage developed by this rectifier is applied as negative bias to the grid of the 2A4G thyratron.

The arm of R_1 is rotated to the most negative point and, with the arc burning, R_2 is adjusted until the carbon-feed motor driving the electrodes closer together as the carbons are consumed, is just barely turning over. R_1 is then varied until the arc assumes its most efficient length, held at this position until the carbon crater forms and is then re-adjusted for optimum arc length. Thereafter, any increase in arc current caused by too rapid carbon feed develops a higher negative bias on the grid of the thyratron, cuts this tube off and slows down the feed motor. Conversely, any decrease in arc current speeds the motor up.—Flaherty, ELECTRONICS, March, 1942, p. 65.

Auto Distributor Point Checker

ADJUSTMENT OF AUTOMOBILE distributor point spacing by means of a feeler gauge does not insure optimum ignition system performance in high-speed engines. Sparking voltage is dependent upon current flowing in the primary of the ignition coil at the moment the points break and the value to which current may build up is limited by the length of time the points are closed between breaks. The device diagrammed provides a visual indication of the percentage of time points are closed. Its meter may also be calibrated to indicate distributor point driving cam angle, the method of checking preferred by the automotive industry. Voltage developed across a condenser and then discharged supplies motivating energy.

Input terminals D and G are connected across the condenser placed in parallel with the points by the automobile manufacturer to minimize point burning. When the points are closed, or switch S_2 is in the "set" position so that the meter may be adjusted to full scale by varying the 7,500 ohm resistor, the input to the 6H6 rectifier tube is short-circuited and no current flows in the 25,000 ohm resistor constituting the load for this tube. The grid of the 884 thyratron, connected to cathode through this same resistor, receives no bias voltage and the 22½ volt battery potential initiates a discharge and causes anode current to flow through the meter.

When the distributor points open, an oscillation voltage appears across the condenser in parallel with the points. Voltage appears across the input to the 6H6, rectified current flows through the 25,000 ohm resistor and a voltage drop appears across it. The grid of the 884 receives a large negative bias voltage sufficient to stop discharge and cut off anode current flowing through the meter. Ionization of a thyratron operating on d.c. may be stopped in this unconventional manner provided current flowing in the anode circuit is limited as, in this case, by the 7,500 and 1,500 ohm resistors.

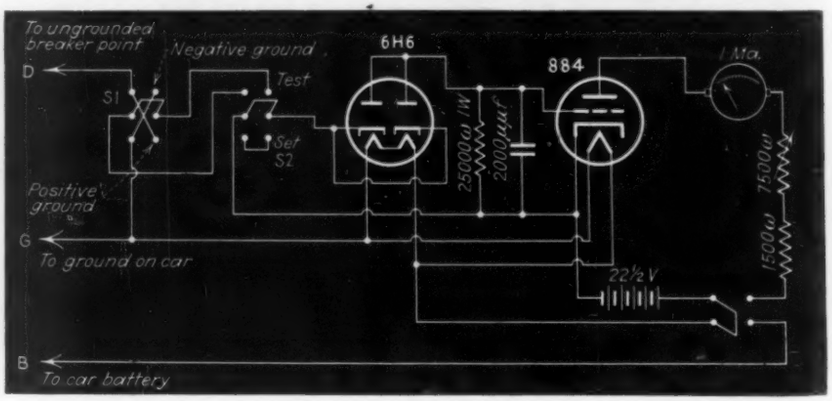

Distributor point checker. It draws only two to three ma from the ignition system to which it is connected and spark intensity is not affected by this negligible primary circuit loading

IN Sections I and II of this discussion of tubes as applied to industrial problems will be found first, a treatment of the several types of tubes used and their characteristics, and second, how these tubes are integrated into electrical circuits; i.e. how tubes act as amplifiers, as rectifiers, as energy converters, etc., and how tubes are associated with relays, resistances, capacitances and other electric or mechanical equipment.

In Section III will be found many typical examples of how tubes are used in industry. No pretense is made that the following pages cover the entire field of electronics in industry. Only a dictionary-sized book could do that. This third section is intended as an idea stimulator; as a place to look when the engineer seeks ways in which tubes might solve problems. Although the applications are specific, the basic phenomenon back of each one of them may be applied in many other ways.

The applications are divided into three major divisions so that the reader may more easily find what he is looking for. These divisions are arranged according to the control stimulus that is available to make the tube perform its job. Thus there are applications depending upon an electrical stimulus; upon a physical or chemical stimulus; and upon a light stimulus. In each case the basic phenomenon is outlined, sufficient detail is given to explain the use to which the tube is put, and a reference tells where the reader may find more complete data.

Extinction of the thyratron discharge does not occur simultaneously with the opening of the distributor points but is slightly delayed. This delay is capable of introducing considerable measurement error. The error is made negligible by the inclusion of the 2,000 $\mu\mu$f capacitor, which delays initiation of the discharge when the points close by approximately the same amount.—Eltgroth, ELECTRONICS, April, 1942, p. 34.

Pinhole Detector

RUBBERIZED CANVAS sheeting is passed between two rollers which are saturated with a conducting liquid. Each roller is connected to the grid circuit of an over-biased amplifier. If there is even an extremely small pinhole in the canvas, the conducting liquid will penetrate it and form a conducting path through the canvas. Thus, a positive voltage, whose value is determined by the voltage divider made up of the 32,000-ohm, the 1,000-ohm, the 5,000-ohm resistors and the conducting liquid between the rollers, is applied to the grid of the pentode. This reduces the bias on the grid and permits an anode current to flow for an instant. This impulse is passed on to the grid of a gas triode which then actuates a relay. The relay operates an alarm or a marking device to locate the defect. This circuit must be operated on a.c. with one side grounded so that the grid of the gaseous triode can gain control after each operation.—*Electronic Engineering* (London), July 1941.

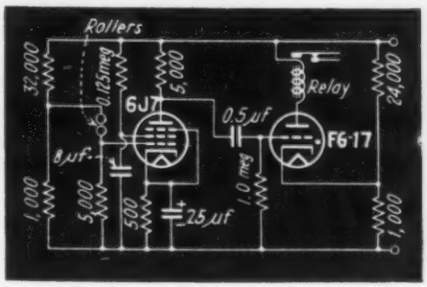

Pinhole detector circuit diagram. This instrument will sound an alarm or mark the location of the pinhole

Power Factor Meter

THIS METHOD OF MEASURING power factor involves the use of a thyratron whose anode current is a function of the phase angle between a voltage and a current. Line voltage, or a voltage having the same phase as the line voltage, is applied to the anode and another voltage whose phase is the same as the load current is applied to the grid. The grid voltage is obtained by passing the load current through a resistor and passing the voltage across the resistor through a step-up transformer to attain the proper value. Since conduction in a gaseous tube cannot ordinarily be stopped by increasing the negative potential of the control grid, lagging power factors cannot be measured because all such factors would give the same indication on the anode current meter. To overcome this an adjustable phase-shifting network is employed in the grid circuit so that any point, preferably the midpoint, of the meter scale may be used to indicate unity power factor with lower anode currents to indicate lagging power factors and higher anode currents to indicate leading power factors. In some cases it may be desirable to have the unity power factor points at different points of the scale. This may be done by proper selection of the condensers of the grid phase shifting networks. The anode current is rectified by a copper oxide rectifier and a d-c meter is calibrated in power factor. The same meter may be used for measuring both the rectified anode current and the a-c grid voltage.—Bereskin, ELECTRONICS, October, 1941, p. 38.

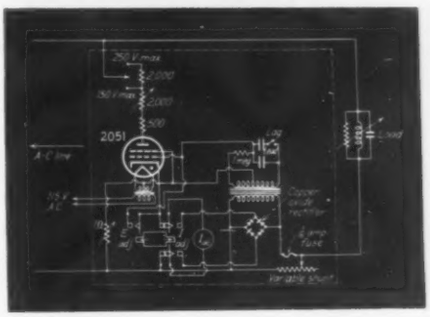

Power factor meter circuit diagram. The anode voltage is in phase with the line voltage and the grid voltage is in phase with the load current. The average anode current is a measure of the phase angle between the load voltage and current

Anti-Electrolysis Relay

WHEN A GAS MAIN IS located close to an electric railway, stray currents from the railway frequently damage the main by producing electrolytic action and corrosion. Damage is done when the main is at positive potential with respect to the rails, causing a current flow from rails to main. It may be avoided by using a directional relay circuit such as the one illustrated which employs a thyratron tube.

When the rails are positive with

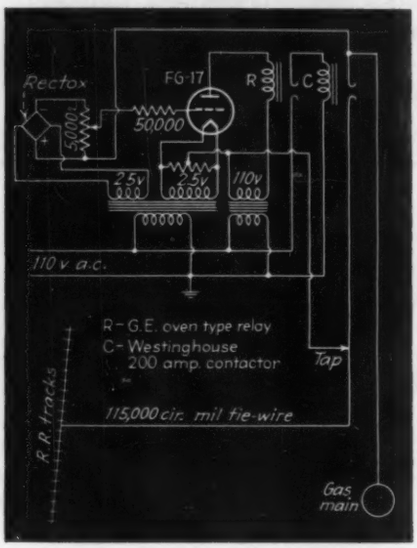

Anti-electrolysis relay. This circuit protects a gas main by preventing current flow from electrified railway tracks to main

respect to the gas main, voltage from the tie-wire tap bucks the fixed bias supplied to the grid of the FG-17 by the Rectox unit, making the grid of the tube less negative with respect to the cathode. The tube conducts and anode current closes relay *R*, which closes contactor *C* and permits current to flow from main to rails. Reversal of external voltage polarity produces an increase in negative bias on the tube, causing it to cease conducting and opening up the tie-wire circuit between main and rails.—Davis and Wainwright, ELECTRONICS, March, 1942, p. 72.

Electrostatic Powder Separator

CERTAIN DRY, POWDERED materials may be separated from each other by electrostatic action. In the chemical field, for example, among the materials which may be separated in this manner are sphalerite and iron pyrites, graphite and mica, biotite micas and muscovites, garnet and metal particles. These have essentially different electrical characteristics and this difference provides a means of attack.

The materials electrically unlike to be separated are passed over or between electrodes charged to about 15,000 volts d.c. One material picks up and retains a charge in its passage over or between electrodes sufficient to cause it to adhere to an electrode. The other material flows unimpeded through the separator to a collecting hopper. High voltage d.c. to operate such separators is readily obtained by stepping up a-c power line voltages through suitable transformers and then rectifying electronically.—ELECTRONICS, January, 1942, p. 58.

Remote Control of Camera Focus

IF ONE OPTICAL element of a complex photographic lens system is substituted for the conventional cone of an electro-dynamic loudspeaker, focus of the lens system may be adjusted by electrical remote control.

A constant d-c potential is fed to the field-coil of the unit. A variable source of d.c. is connected to the coil carrying the movable optical element. By altering the lens-coil potential and/or polarity this coil may be caused to assume various positions with respect to the field coil, hence the movable optical element may be made to assume various positions with respect to the fixed lens elements.

If a.c. is also fed to the lens coil

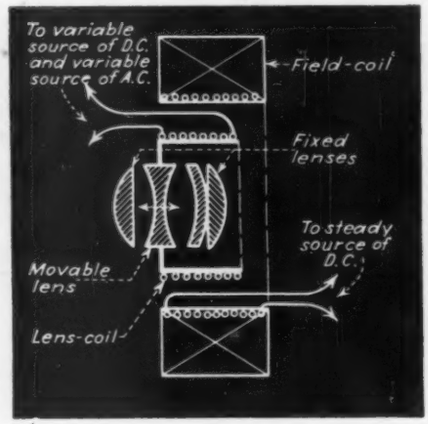

Electronically controlled lens of a motion picture camera. The principle appears to have possibilities for use in connection with other optical devices

this coil may also be caused to oscillate back and forth about an axis, the speed of oscillation being dependent upon the frequency of the supply voltage and the distance of travel being dependent upon its amplitude. If the lens system is designed so that changes in focal length do not result in changes in image size, lens element oscillation can materially increase the depth of focus. The source of a.c., variable with respect to frequency and amplitude, may be a vacuum tube oscillator.—MacDonald, ELECTRONICS, March, 1942, p. 44.

Precipitator for Matter Suspended in Gases

IT IS KNOWN THAT suspended matter in smoke, fumes or fog can be flocculated, or caused to form clouds or masses which precipitate, by high frequency sound vibrations of the order of 17,000 cps. This knowledge has distinct industrial possibilities but one stumbling-block is the design of sound generators which will develop sufficient power for the purpose.

One experimental generator comprises a solid cylinder of duralumin supported in an open-ended housing by an annular web or ring which is an integral part of the cylinder and extends out from its mid-section. A driving ring electrically equivalent to a single-turn coil, also made as an integral part of the cylinder and at its bottom end, projects into the radial gap of a pot magnet energized by a field coil. The ring is inductively excited by an adjacent driving coil. The unit thus resembles a dynamic loudspeaker in construction, the duralumin cylinder taking the place of the conventional diaphragm or cone and the "voice-coil" being driven inductively to eliminate frictional damping.

The cylindrical duralumin cylinder is designed to vibrate at one critical frequency and is an extremely efficient device for translating electrical energy into high frequency sound at this frequency. Efficiency is so critical with respect to frequency, in fact, that it is desirable to use the sound generating device itself as a frequency control element for the electronic equipment which supplies driving power. This is done by placing a small disc of metal on the top of the pot magnet and insulated

from it by a thin disc of Bakelite. This disc, in conjunction with the closely adjacent bottom end of the duralumin cylinder or vibrator, serves as a condenser microphone connected to the input circuit of an associated amplifier. It will thus be seen that the overall equipment operates as a mechano-electronic oscillator, a.c. generated by changes in spacing between the plates of the condenser microphone energizing the amplifier at the resonant frequency of the duralumin cylinder and supplying power for the operation of the sound generator at that frequency.

Amplifier power output used in recent experiments has been about 200 watts. Overall translator efficiency of the order of 30 percent or more has been obtained.—St. Clair, *Review of Scientific Instruments*, May, 1941, p. 250.

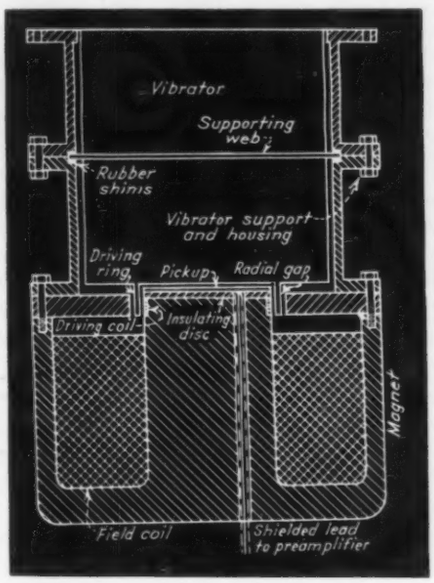

High-frequency, high-power sound generator. Critically resonant, it serves as its own frequency controlling source

Magnetic Field Plotter

THE MAGNETIC FIELD PATTERN of coils may be automatically plotted on paper records by means of the device illustrated here in elemental form.

The coil to be tested is fastened to the center of the turntable shown at the left and energized by a.c. Both turntables are held still and the search coil-recording stylus drive mechanism is started, causing the search coil to approach the center of the test coil turntable while the recording stylus approaches the center of the recording turntable. During this period the recording stylus draws a line from the periphery of the paper disc toward its center. At a point determined by the strength of the test coil field and by the sensitivity adjustment of the amplifier sufficient voltage is induced into the search coil to trip the electronic reversal switch and the mechanical link returns both search coil and recording stylus toward the peripheries of their respective turntables. When the peripheries are reached a mechanically actuated limit switch starts a motor which turns both turntables simultaneously to the next index position, stops them and then starts search coil and stylus once more toward the centers of the turntables.

It will be seen that when this cycling process has been completed for every index position around the entire 360 degrees of turntable rotation the configuration of the test coil field may be determined by noting the shape of the pattern formed by the inner ends of the lines drawn on the paper record. In practice, the stylus of the field plotting device may be a fine metal wire and the paper record may be of high resistance metallic material. If a spark is caused to arc through the paper record at the instant the search coil reaches its innermost point of travel and no record trace is made except at this instant field configuration may be determined as before and the record may be re-used for other positions of the test coil or other test coil plots. It is also practical to energize the test coil with d.c. if the search coil is arranged so that it rotates at a constant and high rate of speed, rotation of the search coil providing the a-c impulses necessary for operation of the amplifier.—Weiller, ELECTRONICS, May, 1942, p. 52.

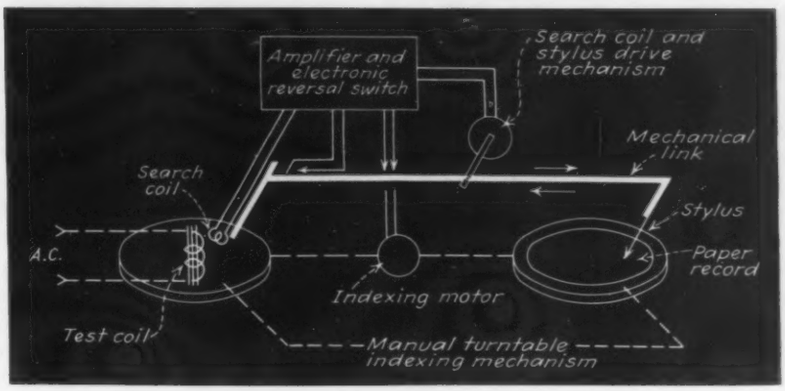

Automatic coil field plotting machine in elemental form

Fader for Neon Signs

THE BRILLIANCY OF neon signs cannot be effectively reduced by cutting down the a-c voltage applied to them by conventional means, such as tapping down on the transformer secondary or introduction of a primary circuit "losser", since ionization producing the characteristic glow will cease before the voltage has been dropped enough to produce perceptible dimming. Brilliancy may, however, be reduced by varying the time in each cycle during which voltage is applied. This amounts to reduction in effective a-c voltage but if a gaseous control tube is used in the primary of the sign transformer to accomplish it the surge voltage introduced by the sharp starting charac-

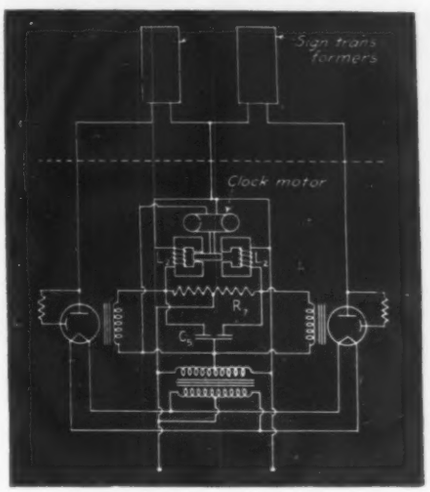

Fader circuit for neon signs, using Permatron magnetically controlled tubes

teristic of the tube will be sufficient to ignite the sign even at low brilliancy levels.

The figure shows a method of fading a neon sign of one color into a neon sign of another color. Permatron tubes are magnetically controlled by a phase-shift circuit consisting of reactors L_s and resistor R_1. The inductance of the reactors is periodically varied in opposite sequence by a synchronous motor-driven cam which moves iron in and out of the gaps in the reactor cores. The amount of inductance in the reactors at a given instant determines the amount of voltage magnetically applied to the Permatrons and therefore controls conduction.

Condenser C_5 resonates the control coils to reduce the load on the phase-shift circuits.—Overbeck, ELECTRONICS, April, 1939, p. 25.

Overvoltage Relay

EQUIPMENT MAY BE protected against overvoltage by a relay making use of a gaseous triode. The line voltage is applied to the anode in series with an electromagnetic relay and a portion of the line voltage is reversed in phase and reduced (in a transformer) to a point near the critical grid voltage for application to the grid. The circuit is shown in the accompanying diagram. A voltage divider consisting of a 400-ohm rheostat and a 40-watt incandescent lamp is connected directly across the line and a step-down transformer is connected across the lamp. The secondary of the transformer applies voltage, its phase reversed, between the cathode and the grid. When the line voltage increases, the grid voltage increases in a negative direction and, at a point determined by the setting of the rheostat, will cause the type 885 tube to cease passing current thereby de-energizing the relay and opening the line switch. The purpose of using the lamp is to magnify the voltage increase somewhat because of the temperature-resistance characteristic of the filament.—Kretschmar, ELECTRONICS, February, 1941, p. 48.

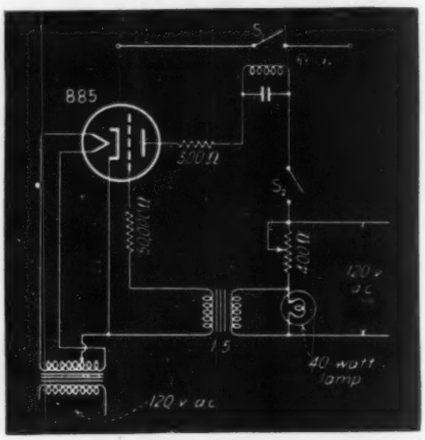

This overvoltage relay reverses the phase of the line voltage, reduces it to a voltage close to the critical grid voltage of a type 885 gaseous triode, and applies it to the grid to control a power line relay

Checking Internal Soldered Joints

THE QUALITY OF THE internal soldered joints between the handle and the tang of a table knife is checked by the degree of absorbtion of x-rays in joint (depends upon the amount of lead present) at the factory of Oneida, Ltd. If such a joint is satisfactory, the x-rays will be almost entirely absorbed, but if the joint is imperfect, x-rays will pass through the knife and into a chamber where the air will be ionized to some degree. If a pair of oppositely charged electrodes are placed within the chamber, a very small current will flow because of the migration of ions to the electrodes. In this particular case the amplitude of the current is of the order of 10^{-9} (one billionth) ampere. To make this current useful in rejecting a defective knife, a vacuum tube amplifier of unusual design is used. A type 954 acorn tube with low voltages applied to the electrodes is used. The plate voltage is 7.7 v and the voltage on the first grid is positive. The filament, however, operates at normal voltage. The ionization current is passed through a 2500-megohm resistor and the resultant voltage is applied to the suppressor grid. This causes a larger current to pass through the tube and to operate a relay in the plate circuit. A second relay actuates the reject solenoid. This device is capable of testing table knives at the rate of 1400 per hour.—Woods and Kenna, ELECTRONICS, April 1941, p. 29.

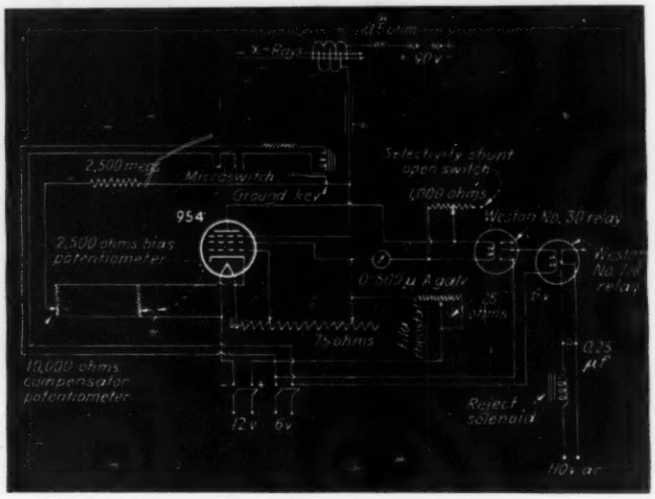

Circuit diagram of the amplifier used to increase the current through the ionization chamber from a value of 10^{-9} ampere to a level which is capable of operating relays and a solenoid

Resistance Welding Control

RESISTANCE WELDING may theoretically be accomplished by connecting welding electrodes to the low-voltage, high-current secondary of a welding transformer and supplying the primary of the transformer with a.c. This would be equivalent to using the upper part of the circuit shown in the accompanying figure, including the connection indicated as a dotted line and excluding everything beneath this line. In practice, satisfactory welds could scarcely be made in this manner due to variations in the resistance of metals to be welded. Extremely low resistance, for example, would permit all the current available from the line and passed by the transformer to flow through the work, with the result that either the work or the electrodes or both would burn up. Some method of controlling the amount of current flowing through the work, or the time during which current flows, or both, is required.

In the basic circuit shown, one leg of the a-c supply line is broken and

(*Continued on page* 98)

Stimulus—PHYSICAL or CHEMICAL

Blood Pressure Recorder

WHEN BLOOD PRESSURE is determined by a physician an inflatable cuff is placed around the arm of the patient and a stethoscope is applied below the cuff. The pressure in the cuff is raised above systolic pressure (heart contracted) and allowed to fall gradually. When pressure in the cuff is slightly below systolic pressure the arterial walls slap together rhythmically and produce sounds which may be heard in the stethoscope until cuff pressure falls below diastolic pressure (heart relaxed), at which time the sounds cease.

Systolic and diastolic blood pressures may be recorded automatically. An air pressure recording instrument is substituted for the gage. A contact microphone or stethophone is substituted for the stethoscope and drives an amplifier, the output of which operates a pen which makes intermittent marks on the edge of the pressure chart so long as sounds are present as outlined above. Thus the physician need not listen for blood sounds but may merely note recorded cuff pressures at points where blood sound stylus marks start and stop.

Recent refinements eliminate the necessity for manipulating the air valves and repeat measurements are made automatically at intervals of a few seconds or minutes. A motor driven switch opens and closes intake valve V_1 at required intervals. A thyratron tube circuit opens and closes outlet valve V_2, starts and stops movement of paper through the recording instrument, controls circuit timing.—Gilson, ELECTRONICS —May, 1942, p. 54.

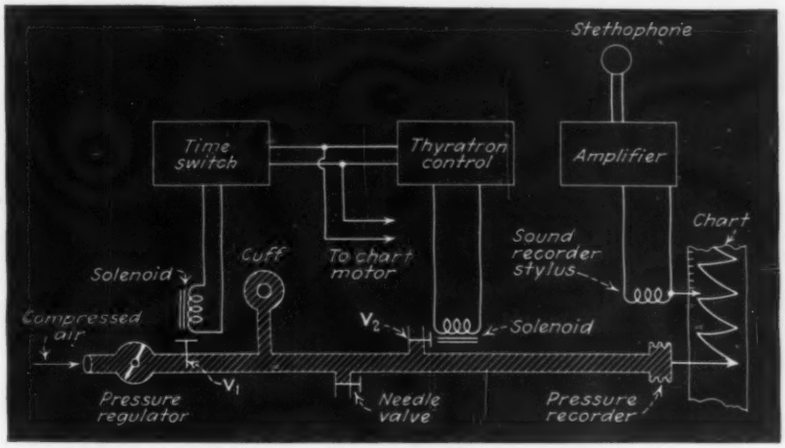

Blood pressures are recorded using an air pressure and sound pressure actuated styli. Cycling of the device is accomplished by electronic control

Capacity Burglar Alarm

IF A WIRE OR ANTENNA is stretched out a few feet above the ground on insulated supports there will be a definite electrical capacity between that wire and the ground. Movement of a foreign body into the field of the wire will increase antenna-to-ground capacity. Weeds growing up beneath the wire, change in ground conductivity due to moisture or formation of ice on the wire will also increase capacity, producing a false alarm unless the circuit is designed to be insensitive to relatively slow capacity changes.

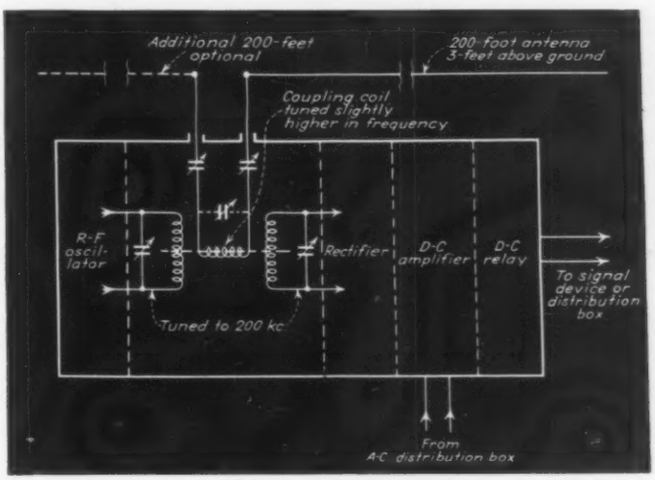

Block diagram of capacity operated alarm designed for outdoor boundary protection service. It employs a circuit minimizing effects of relatively slow changes in capacity caused to growing weeds and by rain, ice and snow

One effective method of accomplishing the above objective is illustrated in the block diagram. A radio-frequency oscillator is tuned to a given frequency and coupled through an intermediate coil to a rectifier tuned to the same frequency. The intermediate coil forms part of the antenna circuit and is tuned to a frequency slightly higher than that of the oscillator and rectifier. The d-c output of the rectifier is amplified, delivering current to the signalling relay only when it receives sharp pulses of input voltage. Slow input voltage changes leak off the coupling capacitors to ground through the amplifier grid resistors before voltage can build up sufficiently to trip the relay.

When an intruder enters the field of the antenna, increased antenna-to-ground capacity is reflected back into the antenna coil. This intermediate coupling circuit more closely approaches the resonant frequency of the oscillator and rectifier, coupling between oscillator and rectifier is increased and the d-c amplifier receives a sharp pulse of input voltage. Or, if the designer so desires, the circuit may be arranged so that when the antenna approaches the resonant frequency of the oscillator sufficient power is absorbed from the oscillator circuit to "rob" the detector of input power and produce a sharp decrease in input voltage to the d-c amplifier. Either method of coupling will actuate such an alarm.—Mac Donald, ELECTRONICS, February, 1942, p. 38.

Hydraulic Flow Indicator

MANY INDUSTRIAL PROCESSES require continuous indication of the rate of flow of a liquid. Others require only

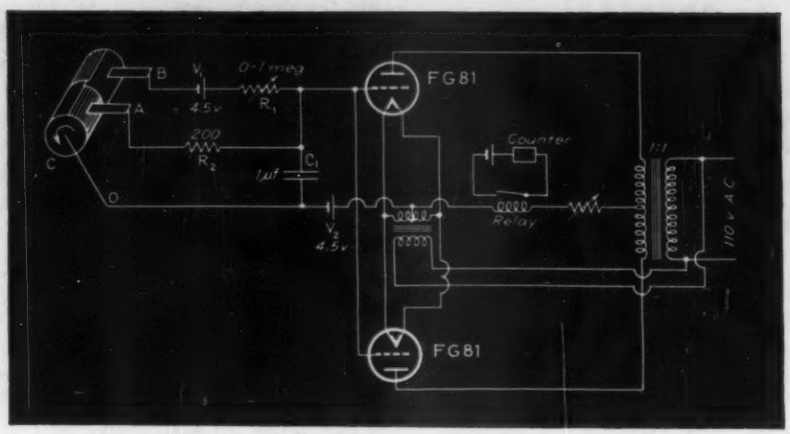

Hydraulic flow indicator. It counts when commutator rotation speed is sub-normal

that sub-normal rates of flow be indicated. This electronic device operates a counter when liquid flow is sub-normal. The portion of time in a given period in which flow is sub-normal may be calculated.

Commutator C is rotated by the flowing liquid in any desired manner. When it is in the position shown, thyratron tube grids are biased sufficiently negative with respect to cathodes by battery V_2 to prevent flow of anode current through the counter. As the commutator rotates, brush A breaks contact with C while brush B makes contact with C. In this position battery V_1 charges capacitor C_1 through variable resistor R_1. If the voltage across C_1 reaches a value sufficient to "neutralize" the negative bias supplied by V_2 the thyratrons fire and their anode current operates the counter.

The time required to charge C_1 is dependent upon the resistance of R_1. To adjust the instrument the commutator is rotated at normal speed and the value of R_1 is set so that the thyratrons are on the verge of firing. If the commutator rotates faster than normal, brush B is in contact with C so short a time in each rotation cycle that the thyratrons cannot fire under any anode voltage condition. Should the commutator revolve slower than normal, however, C_1 charging time is increased so that the tubes fire and the counter operates once each cycle so long as sub-normal liquid flow continues.—Ware, ELECTRONICS, October, 1940, p. 36.

Liquid Level Indicator

WHERE THE LEVEL of a liquid having appreciable electrical conductivity must be continuously measured or recorded and it is desirable that the measurement equipment introduce a minimum of physical disturbance at the surface of the liquid the operating principle of the device shown will be found useful.

The resistance between a sharply pointed metal electrode and the surface of the liquid is used as the variable arm of a bridge circuit energized by a.c. The resistance of the variable arm is dependent upon the area of the metal electrode contacted by the liquid; therefore bridge output voltage is proportional to unbalance caused by rise or fall in liquid level.

Bridge output voltage is amplified and applied to the grids of two thyratron rectifier tubes whose anodes are operated from the same a-c source that drives the bridge. Thyratron grid-anode voltage phase relationship as controlled by the bridge output voltage permits only one thyratron to fire under a given set of operating conditions, the tube fired depending upon the phase of bridge output voltage. If R_1 is greater than R_2 one thyratron rectifier fires and the other remains idle while if R_2 is greater than R_1 the first thyratron cuts off and the second thyratron fires. The metal electrode of the device is geared to a split-field electric motor. One thyratron rectifier supplies d.c. to one of the motor field windings while the other thyratron supplies d.c. to the second field winding. Circuit connections are such that a falling liquid level causes the metal electrode of the device to be driven down toward the liquid surface while a rising liquid level causes the metal electrode to be raised until the bridge balances. Just the tip of the metal electrode touches the liquid surface due to follow-up action.

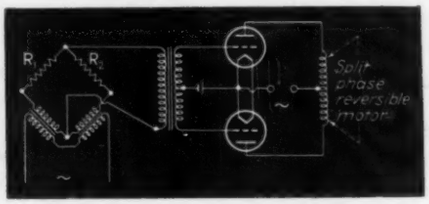

Fundamental circuit often used for controlling direction of rotation of a motor by means of a phase-shifting bridge

Mechanical movement of the metal electrode may be used to move a level-indicating stylus or to actuate a continuous recorder.—Ware, ELECTRONICS, March, 1940, p. 23.

(Continued on page 102)

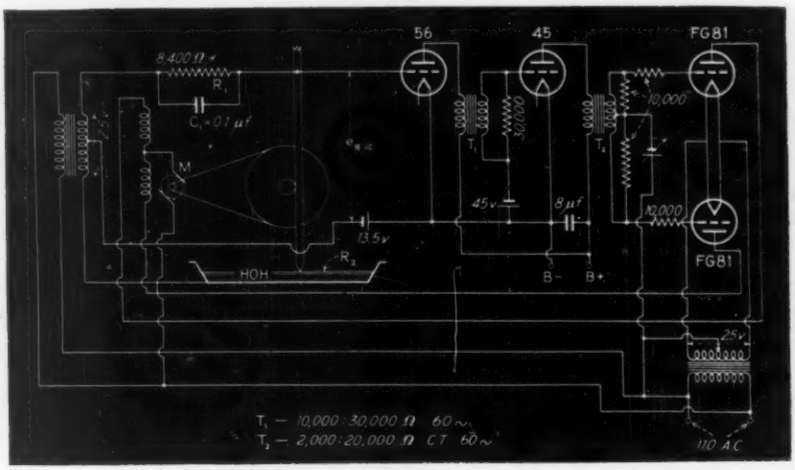

Liquid level indicator. A metal electrode touching the surface of the liquid follows the surface closely as level rises or falls

Stimulus—LIGHT

Control of Bessemer Converter

INVESTIGATION OF THE LUMINOUS energy content of the flame of a Bessemer converter has shown that the quality of the steel produced bears a direct relation to the history of the flame. A record is made by photoelectric means at the steel plant of the Jones and Laughlin Steel Corp. in Pittsburgh, and this record is used in controlling the operation of the converter.

The phototube unit is located in this particular case about 60 feet from the converter and is so arranged that light from other sources do not affect its operation. Suitable filters are used to emphasise the characteristics of the flame which are most important to the characteristics of the steel being produced.

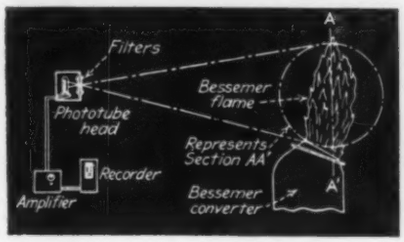

Arrangement of the photoelectric equipment in relation to the flame of the Bessemer converter

In the graph point *A* is the start of the blow and the direction of increasing time is from right to left. *A-B* is called the silicon blow because a large part of the silicon content is burned out during this period. The portion *B-E* is called the carbon blow for similar reasons. The maximum height represents the metal temperature and gives an indication of the nitrogen content of the steel. Near the end of the blow the intensity of the flame dies down and the point where this occurs is referred to as the end point because it has served to indicate when the blow should be turned down. Point *F* is generally called the flash back and is caused artificially or by the flame inpinging against the shield on the wall of the building. This is a valuable reference point for checking the after-blow and a special effort is made to select a filter combination on the phototube housing that shows this clearly.—Work, ELECTRONICS, June 1941, p. 124.

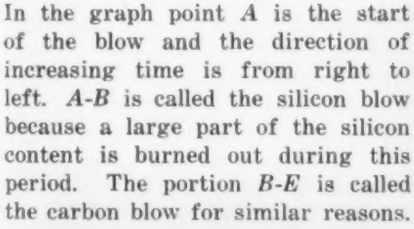

Typical record of luminous energy content of Bessemer flame produced by photo tube equipment

Register Control

COLOR PRINTING BY the rotogravure process requires precise control of register, i.e., successive color impressions must line up. Perfect register is difficult to achieve due to variations in the speed of motors and sag or tension in the paper. It is facilitated by electronic control, one example of which appears here.

In brief, register marks are printed at regular intervals along a margin or fold of the paper web by the cylinder making the first color impression. As the web passes over the cylinder making the second color impression these marks are scanned by a light source and phototube. To one end of the cylinder making the second color impression a disc having slots comparable in number and spacing to the register marks is simultaneously scanned by another light source and phototube. The output of both scanning units is then passed to an impulse timing comparator.

When successive color rolls are operating in exact synchronism and the paper web has not sagged or tightened between cylinders impulses from the two scanning heads arrive at the comparator at the same time and, it might be said, neutralize each other. If impulses from the paper web scanner arrive too early or too late in relation to impulses from the slotted disc at the end of the cylinder a thyratron-controlled pilot motor slows down or speeds up

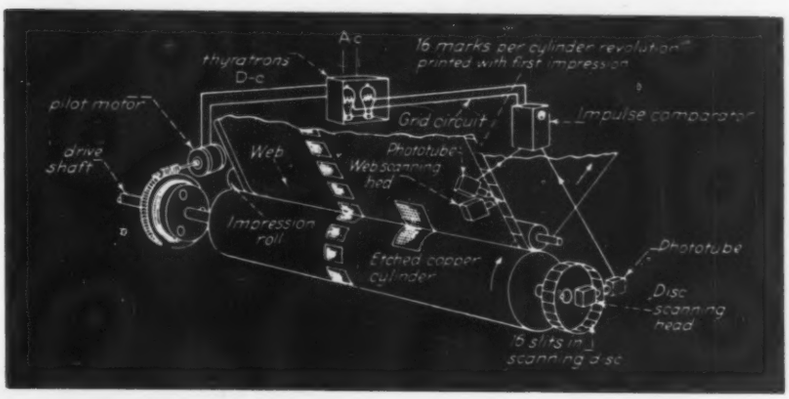

Printing register control using phototubes and thyratrons. The scheme may be applied to four-color presses

the cylinder or moves rolls manipulating the web until synchronism is restored.

Third and fourth impression rolls may be provided with similar slotted discs and scanning heads, the register marks printed with the first color serving as the basis of comparison throughout an entire multicolor printing process.—Wright, *G. E. Review*, November, 1941. (ELECTRONICS, February, 1942, p. 72.)

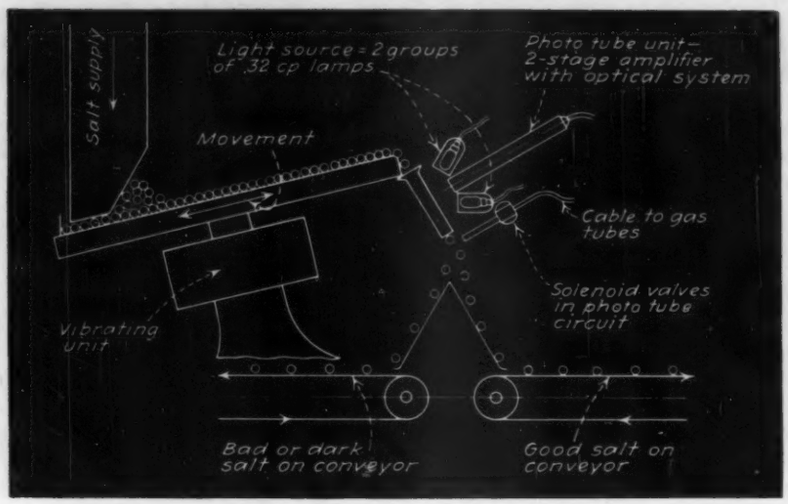
Salt supply
Light source = 2 groups of 32 cp lamps
Photo tube unit — 2-stage amplifier with optical system
Movement
Cable to gas tubes
Solenoid valves in photo tube circuit
Vibrating unit
Bad or dark salt on conveyor
Good salt on conveyor

Method of operation of rock salt sorting machine. The pieces of salt drop one at a time past the photoelectric unit. The dark pieces reflect less light causing a blast of air to blow them off the path of the good pieces

Rock Salt Sorting Machine

ROCK SALT MUST BE sorted to remove the dark colored pieces before it can be sold. A photoelectric method can be used by differentiating between the reflection characteristics of the desired white particles and the undesired dark particles. The particles are about $\frac{1}{8}$ inch in diameter and can be individually examined. Here, the mechanical portion of the system was more difficult to develop than the photoelectric portion. After considerable experimentation the mechanism shown in the diagram was built. The vibrating conveyor feeds the salt in ten individual rows. The salt falls off, one crystal at a time, through the small directional chutes. Each of the ten chutes is arranged with a phototube housing in the form of a 2-inch square stick about 18 inches long. Each phototube unit contains a two-stage amplifier. The power supply and the thyratrons are located at a remote point. If a dark salt crystal appears before any one of the ten photoelectric units, a small fast-acting solenoid valve opens long enough to allow a squirt of air to move that dark crystal out of the normal path of fall. It then falls on one side of a "camel back" while the good pieces fall on the other side. The solenoid air valves must open very rapidly and they operate directly in the anode circuits of the thyratrons. The valves close automatically to eliminate the possibility of rejecting good salt. The valves were designed to open and close 20 times per second against an air pressure of 90 pounds per square inch. By adjustment of the grid bias on the amplifiers and the intensity of the light beam various grades of salt can be sorted for different degrees of purity.—Powers, ELECTRONICS, August 1941, p. 33.

Modulated Beam Photoelectric Alarm

CONVENTIONAL PHOTOELECTRIC burglar alarm systems employ a light source of constant output. Interruption by an intruder of an infrared beam projected to a distant phototube reduces the d-c output of the phototube and its associated d-c amplifier and actuates a relay controlling a signalling device. Such systems are sometimes rendered insensitive by increases in ambient light, such as those caused outdoors by the transition from darkness to daylight or indoors by the turning on of artificial illumination. Ambient light level may become so high that the relay is held open by phototube current even when the beam is interrupted.

This difficulty may be minimized by using modulated light. A motor-

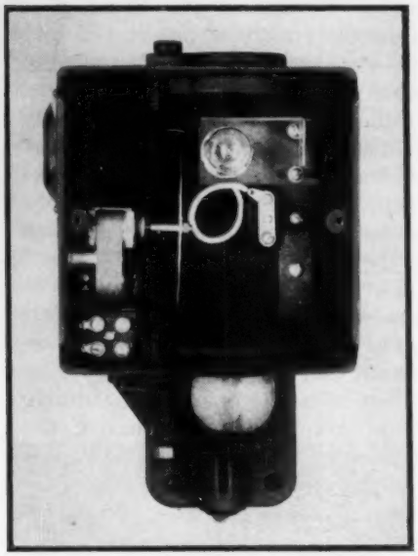

Projector unit of typical modulated-beam photoelectric system. Edge of disc which interrupts light appears as a vertical white line just to the left of center

rotated disc with holes punched in its periphery is introduced between the light source and the projection lens. The projected light beam is chopped up at a rate dependent upon the speed of the motor and number of holes in the disc, usually between 500 and 1,500 times per second. The phototube in the distant receiving unit operates into an a-c amplifier equipped with a band-pass filter which permits amplification only when current delivered by the phototube is modulated at the prescribed

(*Continued on page* 83)

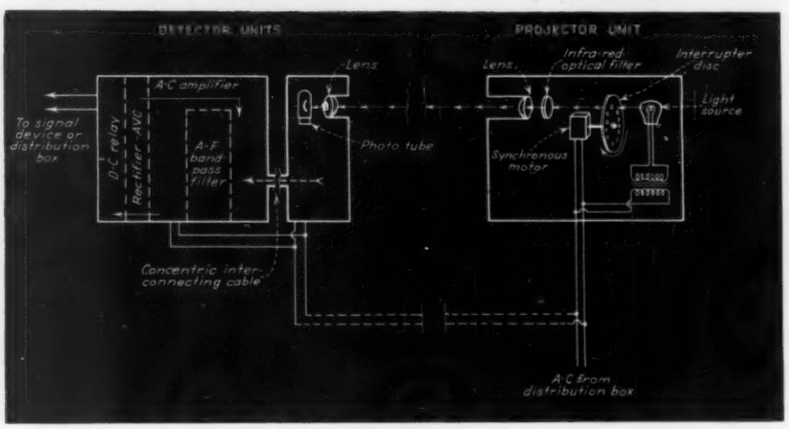

Block-diagram of typical modulated-beam photoelectric alarm system. Beam-throw distances of 1,000 feet or more are proving practical with such systems

(*Continued from page 78*)

rate. The output of the amplifier is rectified and the resultant d.c. keeps the warning device relay open in the usual manner until the light beam is broken.

The warning device relay is held open only when the receiving unit phototube receives light modulated at the prescribed frequency. Light which is unmodulated or light that is modulated at other than the prescribed frequency, such as that from lamps powered by 60 cycle lines, does not paralyze such systems as they are not affected by reasonable variations in light intensity.—MacDonald, ELECTRONICS, February, 1942, p. 38.

Automatic Ship-Steering Device

NO MATTER HOW perfectly designed, a ship set upon a given compass course will not exactly hold that course with the tiller lashed down or the steering wheel locked. The helmsman must continuously correct off-course variations caused by the action of sea or wind upon hull and rudder if the desired course is to be made good. Continuous correction may be accomplished automatically, one device designed for this purpose scanning the ship's compass card photoelectrically and using off-course movement of the card to initiate movement of the rudder in a compensating direction.

The compass card carries a mirror which reflects a beam of light from a source directly above it to a system of prisms and phototubes. When the ship is on her set course the middle phototube is illuminated and this phototube's output current renders automatic steering mechanisms inoperative. A deviation in course throws the light into one of the phototubes to the side of center and the output current of the phototube so illuminated actuates an electronic amplifier which trips a thyratron that operates a split-field motor in the direction necessary to move the rudder so that the ship is brought back on course. When the light shines on the middle phototube, denoting return to the desired course, the automatic mechanism is rendered inoperative until the ship yaws again. —Chance, ELECTRONICS, June, 1939, p. 41.

Mercury Vapor Detector

THE PRESENCE OF SMALL quantities of mercury vapor in air or other gasses may be detected photoelectrically. If, for example, a phototube sensitive to ultraviolet light is exposed to light from an ultraviolet lamp the presence of mercury vapor in the space intervening between phototube and lamp will decrease phototube output because of scattering of the light. This measurement principal is industrially useful since it permits mercury vapor boilers and mercury vapor turbines to be adjusted so that a minimum of expensive mercury goes up the flue.

The device uses a Wheatstone bridge circuit, the 2A6 amplifier tube constituting one arm of the bridge. It is adjusted for operation by balancing the meter to zero through variation of the 100 ohm resistor with the lamp operating and the air intervening between lamp and phototube clear of Hg and then, with the lamp turned off, varying the 20,000 ohm resistor until the meter reads full scale.

In operation after such adjustment, Hg vapor between lamp and phototube causes a reduction of transmitted ultraviolet light, a reduction of phototube current, less negative bias on the grid of the 2A6, more plate current and a meter reading comparable with the quantity of mercury vapor in the air or gas.—Woodson, *Review of Scientific Instruments*, October, 1939, p. 308.

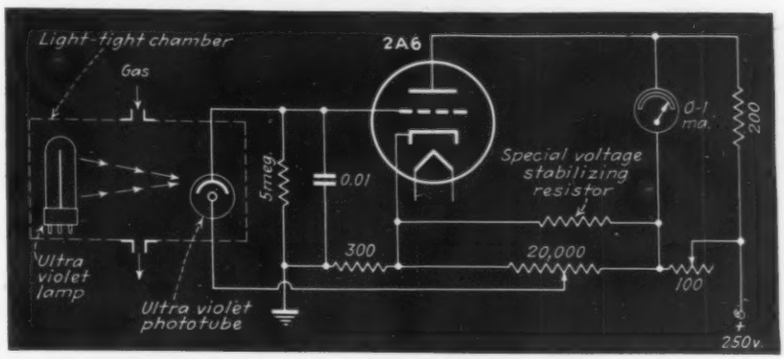

The uv lamp and uv phototube in this mercury vapor detector are placed at opposite ends of a chamber excluding external light. Gas to be checked is introduced into the chamber

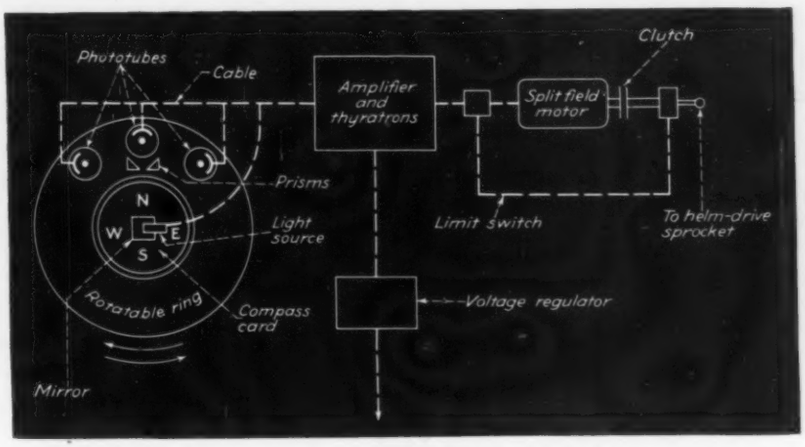

Automatic ship-steering device. When the ship yaws off a set course the light beam illuminates one of the side phototubes, causing the split-field motor to move the rudder in a compensating direction

Dew-Point of Gas Measured by Photoelectric Method

THE INTENSITY OF A light beam after it passes through a film of moisture condensate on the surface of a glass window or mirror is considerably less than if the moisture is not present. This principal is used in the design of a dew-point recorder used by the Colorado Interstate Gas Co., at the Denver metering plant where natural gas arrives from Texas. The purpose of this instrument is to determine the amount of moisture present in the gas and to remove some of it by

NATION-WIDE DISTRIBUTION

GET IN TOUCH WITH YOUR NEARES

The wide-spread distribution of G-E Electronic Tubes is evidence that GENERAL ELECTRIC is recognized throughout the nation as the reliable source of supply for renewal tube requirements.

ALABAMA
Birmingham
*Matthews Electric Supply Co.
Graybar Electric Co., Inc.
Cullman
Deer Electric Co.
Mobile
*Matthews Electric Supply Co.
Montomery
*Matthews Electric Supply Co.
ARIZONA
Phoenix
*General Electric Supply Corp.
Graybar Electric Co., Inc.
W-6 Radio Shop
Radio Specialties Co.
ARKANSAS
Little Rock
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Fort Smith
Interstate Electric Co.
Texarkana
Mims Radio
CALIFORNIA
Fresno
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Spitler, Short & Griffith
De Jarnatt Whlse. Radio Co.
Hollywood
Radio Specialties Co.
Los Angeles
*General Electric Supply Corp.
Graybar Electric Co., Inc.
*E. W. Reynolds Company
Radio Television Sy. Co., Inc.
Radio Specialties Co.
Radio Product Sales Co.
Pasadena
Dow Radio Supply Co.
Oakland
*General Electric Supply Corp.
Graybar Electric Co., Inc.
W. D. Brill Co.
Electric Supply Co.
E. C. Wenger Company
Sacramento
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Santa Barbara
Channel Radio Supply Co.
San Bernardino
Inland Radio Supply Co.
San Diego
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Coast Electric Company
San Francisco
*General Electric Supply Corp.
Graybar Electric Co., Inc.
San Francisco Radio Sy. Co.
San Jose
Frank Quement Company
COLORADO
Denver
*General Electric Supply Corp.
Graybar Electric Co., Inc.

CONNECTICUT
Bridgeport
*General Electric Supply Corp.
Hatry & Young
Greenwich
Greenwich Electrical Co.
Hartford
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Hatry & Young
New Haven
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Hatry & Young
Congress Radio Company
DELAWARE
Wilmington
*General Electric Supply Corp.
Delaware Radio Sales Co.
DIST. OF COL.
Washington
*General Electric Supply Corp.
Graybar Electric Co., Inc.
FLORIDA
Jacksonville
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Miami
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Electric Radio Eng. & Sy. Co.
Orlando
Graybar Electric Co., Inc.
St. Petersburg
Radio Hospital & Parts Store
Tampa
*General Electric Supply Corp.
Graybar Electric Co., Inc.
GEORGIA
Atlanta
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Radio Wire Television, Inc.
Savannah
*General Electric Supply Corp.
Graybar Electric Co., Inc.
IDAHO
Boise
*General Electric Supply Corp.
ILLINOIS
Chicago
*General Electric Supply Corp.
*R. Cooper Jr., Inc.
Graybar Electric Co., Inc.
Allied Radio Corp.
Chicago Radio Apparatus Co.
Newark Electric Co.
Radio Wire Television Inc.
Pearia
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Klaus Radio & Elec. Co.
Quincy
*Crescent Elec. Supply Co.
Rockford
*General Electric Supply Corp.
Rock Island
Tri-City Radio Sy. Co.
Springfield
*General Electric Supply Corp.
Klaus Radio & Elec. Co.
INDIANA
Evansville
*General Electric Supply Corp.
Fort Wayne
*Protective Elec. Sy. Co.
Pembleton Laboratories
Radio Parts Co.
Hammond
Graybar Electric Co., Inc.
Indianapolis
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Van Sickle Radio Co.
Muncie
*General Electric Supply Corp.
South Bend
*South Bend Electric Co.

Terre Haute
*Advance Electric Co.
IOWA
Burlington
*Crescent Elec. Supply Co.
Davenport
*Crescent Elec. Supply Co.
Graybar Electric Co., Inc.
Des Moines
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Dubuque
*Crescent Elec. Supply Corp.
Mason City
*Crescent Elec. Supply Corp.
Sioux City
*Crescent Elec. Supply Corp.
Waterloo
*Crescent Elec. Supply Corp.
KANSAS
Wichita
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Radio Laboratories
Topeka
Radio Laboratories
KENTUCKY
Louisville
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Universal Radio Supply Co.
LOUISIANA
New Orleans
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Shreveport
*General Electric Supply Corp.
MAINE
Bangor
*General Electric Supply Corp.
Rice & Tyler
Portland
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Bartlett Radio Company
MARYLAND
Baltimore
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Radio Electric Service Co.
Cumberland
Morrissey's Radio Sy. Co.
Hagerstown
Zimmerman Wholesalers
MASSACHUSETTS
Boston
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Brattle Radio Co.
Radio Wire Television, Inc.
The Radio Shack Corp.
Springfield
*General Electric Supply Corp.
Graybar Electric Co., Inc.
T. F. Cushing Co.
Springfield Radio Co.
Lawrence
Radio Maintenance Sy. Co.
Worcester
*Coghlin Electric Company
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Radio Maintenance Sy. Co.
MICHIGAN
Ann Arbor
Purchase Radio
Detroit
*General Electric Supply Corp.
Graybar Electric Co., Inc.
M. N. Duffy & Co.
Radio Specialties Corp.
Flint
Graybar Electric Co., Inc.
Grand Rapids
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Jackson
Fulton Radio Sy. Co.

Kalamazoo
*General Electric Supply Corp.
Lansing
Graybar Electric Co., Inc.
Knight Electric Company
Muskegon
Fitzpatrick Elec. Supply Co.
Monroe
H & W Auto Accessory Co.
St. Joseph
St. Joe Radio Co.
MINNESOTA
Duluth
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Northwest Radio
Minneapolis
*General Electric Supply Corp.
Graybar Electric Co., Inc.
St. Paul
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Hall Electric Company
MISSISSIPPI
Jackson
*General Electric Supply Corp.
MISSOURI
Butler
Henry Radio Shop
Joplin
*General Electric Supply Corp.
Kansas City
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Radio Laboratories
St. Louis
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Van Sickle Radio Co.
Gordon Radio Company
Walter Ashe Radio Company
MONTANA
Billings
*General Electric Supply Corp.
Butte
*General Electric Supply Corp.
NEBRASKA
Omaha
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Radio Equipment Corp.
NEW HAMPSHIRE
Concord
Carl B. Evans
Manchester
*General Electric Supply Corp.
NEW JERSEY
Newark
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Aaran Lippman & Co.
Radio Wire Television, Inc.
Paterson
Aaran Lippman & Co.
NEW YORK
Albany
*Havens Electric Co., Inc.
Graybar Electric Co., Inc.
Fort Orange Radio Dist. Co.
Binghamton
*So. Tier Electric Sy. Co.
Buffalo
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Dymac Radio Co.
Elmira
*So. Tier Electric Sy. Co.
Ithaca
*Stallman of Ithaca
New York
*General Electric Company
Metropolitan Dist. Branch
General Electric Supply Corp.
Graybar Electric Co., Inc.
Harrison Radio Co.
Harvey's Radio Shop
Radio Wire Television, Inc.
Sanford Samuel Corp.
Sun Radio Company
Terminal Radio Corp.
Service Radio Engineers
Niagara Falls
*General Electric Supply Corp.
Plattsburg
Bragg Bros.

Poughkeepsie
*Electra Supply Co., Inc.
Rochester
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Beaucaire, Inc.
Radio Parts & Equip. Co.
Brown Radio Service & Lab.
*Masline Radio Parts
Rome
Radio Service Lab.
Syracuse
*Gould-Farmer Co., Inc.
Graybar Electric Co., Inc.
W. E. Berndt
Utica
*Langdon & Hughes Elec. Co.
Vaeth Electric Company
NORTH CAROLINA
Asheville
Graybar Electric Co., Inc.
Freck Radio & Supply Co.
Gibbs Radio Co.
Charlotte
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Shaw Distributing Co.
Durham
Graybar Electric Co., Inc.
Greensboro
Brower Electric Company
Raleigh
*General Electric Supply Corp.
Winston-Salem
Graybar Electric Co., Inc.
NORTH DAKOTA
Fargo
*Dakota Electric Supply Co.
OHIO
Akron
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Canton
*Furbay-Sommer Company
Burroughs Radio Company
Cincinnati
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Jos. N. Davies
United Radio, Inc.
Cleveland
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Northern Ohio Labs.
Progress Radio Supply Co.
Radio Serviceman's Sy Co.
Columbus
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Dayton
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Crosley Distributing Corp.
Findlay
H & W Auto Accessory Co.
Kent
Kladag Radio Labs.
Lima
Lima Radio Parts Co.
Steubenville
Tydings Company
Toledo
*General Electric Supply Corp.
Graybar Electric Co., Inc.
H & W Auto Accessory Co.
Youngstown
*General Electric Supply Corp.
Graybar Electric Co., Inc.
OKLAHOMA
Oklahoma City
*General Electric Supply Corp.
Graybar Electric Co., Inc.
McEldowney & Son
Southern Sales Co.
Tulsa
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Radio, Inc.
OREGON
Astoria
U. Laine's Jewelry Co.
Portland
*General Electric Supply Corp.
Graybar Electric Co., Inc.

GENERAL ELECTRIC

RADIO, TELEVISION AND
ELECTRONICS DEPARTMENT
BRIDGEPORT, CONNECTICUT

G-E Electronic TUBES

Make Them Available Wherever You Are

STRIBUTOR FOR EFFICIENT SERVICE

dio Supply Co.
Dutch Village Radio Co.

PENNSYLVANIA

Allentown
General Electric Supply Corp.
Graybar Electric Co., Inc.

Erie
General Electric Supply Corp.
Warren Radio Co.

Harrisburg
Raub Supply Company
Graybar Electric Co., Inc.

Lancaster
Raub Supply Company
George D. Barbey Co.

Philadelphia
General Electric Supply Corp.
Graybar Electric Co., Inc.
Consolidated Radio Corp.
Radio Elec. Serv. Co., Inc.
M & H Sporting Goods Co.
Eugene G. Wile Company

Pittsburgh
Cahill-tree Electric Company
General Electric Supply Corp.
Graybar Electric Co., Inc.
Cameradio Co.
Tylings Company

Reading
General Electric Supply Corp.
Graybar Electric Co., Inc.
Geo. D. Barbey Co.

Scranton
General Electric Supply Corp.
Fred P. Pursell Company

Uniontown
Zimmerman Wholesalers

Williamsport
*Lewry Electric Co., Inc.

RHODE ISLAND

Providence
*General Electric Supply Corp.
Graybar Electric Co., Inc.
*Kraus & Co.

SOUTH CAROLINA

Charleston
*Perry-Mann Elec. Co., Inc.

Columbia
*Perry-Mann Elec. Co., Inc.
Graybar Electric Co., Inc.

SOUTH DAKOTA

Sioux Falls
*Crescent Elec. Supply Company

TENNESSEE

Chattanooga
*General Electric Supply Corp.
Graybar Electric Co., Inc.

Knoxville
*General Electric Supply Corp.
Graybar Electric Co., Inc.

Memphis
*General Electric Supply Corp.
Graybar Electric Co., Inc.

Nashville
*General Electric Supply Corp.
Graybar Electric Co., Inc.

TEXAS

Abilene
*General Electric Supply Corp.

Austin
The Hargis Co.

Beaumont
Graybar Electric Co., Inc.

Corpus Christi
Strauss-Frank Co.
Graybar Electric Co., Inc.

Dallas
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Southwest Radio Supply Co.
Wilkinson Bros.

Denison
Denison Radio Lab.

El Paso
*General Electric Supply Corp.
Hinson Radio Co.
C. C. McNicol

Fort Worth
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Fort Worth Radio Supply Co.

Houston
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Strauss-Frank Co.

San Antonio
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Strauss-Frank Co.

Temple
Edison's

UTAH

Salt Lake City
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Radio Supply, Inc.

VIRGINIA

Norfolk
*General Electric Supply Corp.
Graybar Electric Co., Inc.

Richmond
*General Electric Supply Corp.
Graybar Electric Co., Inc.

Roanoke
Graybar Electric Co., Inc.

WASHINGTON

Seattle
*General Electric Supply Corp.
Graybar Electric Co., Inc.

Spokane
*General Electric Supply Corp.
Graybar Electric Co., Inc.
Spokane Radio Co.

Tacoma
Graybar Electric Co., Inc.

WEST VIRGINIA

Charleston
*Virginian Electric Co., Inc.
Hicks Radio Supply Co.
Sigmon Radio Supply Co.

Wheeling
Cameradio Co.

WISCONSIN

Appleton
*General Electric Supply Corp.
Valley Radio Distributors

LaCrosse
*General Electric Supply Corp.

Madison
*Crescent Elec. Supply Co.

Milwaukee
*General Electric Supply Corp.
Graybar Electric Co., Inc.

TERRITOY OF HAWAII

Honolulu
*W. A. Ramsay Ltd.

TUBES FOR ALL PURPOSES

INDUSTRIAL APPLICATIONS

SPECIAL PURPOSE

*RADIO RECEIVERS

*** Indicates Distributors who also handle Radio Receiver Tubes**

IF YOU NEED ENGINEERING HELP CALL ON THE G-E FACTORY REPRESENTATIVE NEAREST YOU

NEW ENGLAND DISTRICT

F. A. RAY, G. E. Co.
1285 Boston Ave., Bridgeport, Conn.

S. H. MAGRUDER, G. E. Co.
140 Federal St., Boston, Mass.

W. H. BINGHAM, G. E. Co.
477 Congress St., Portland, Me.

C. E. WHEELER, G. E. Co.
111 Westminister St., Providence, R.I.

J. N. ALBERTI, G. E. Co.
95 State St., Springfield, Mass.

N. GADA, G. E. Co.
129 Church St., New Haven, Conn.

NEW YORK DISTRICT

D. W. MAY, Metropolitan Distributing Branch, G. E. Co.
570 Lexington Ave., New York, N.Y.

T. P. BEGY
115 Frontenac Ave., Buffalo, N.Y.

B. COGSWELL, G. E. Co.
1 West Genesee St., Buffalo, N.Y.

W. A. RAINES, G. E. Co.
89 East Ave., Rochester, N. Y.

D. C. HIERATH, G. E. Co.
570 Lexington Ave., New York, N.Y.

ATLANTIC DISTRICT

R. J. MEIGS, G. E. Co.
1405 Locust St., Philadelphia, Pa.

P. J. WALTON, G. E. Co.
1405 Locust St., Philadelphia, Pa.

L. R. HEISE, G. E. Co.
39 W. Lexington St., Baltimore, Md.

T. B. JACOCKS, G. E. Co.
806 15th St., Washington, D. C.

D. S. McDONALD, G. E. Co.
700 E. Franklin St., Richmond, Va.

A. M. DAWSON, G. E. Co.
535 Smithfield St., Pittsburgh, Pa.

SOUTHEASTERN DISTRICT

R. P. VAN ZILE, G. E. Co.
609 Red Rock Bldg., Atlanta, Ga.

E. T. AUSTIN, G. E. Co.
187 Spring St., N.W., Atlanta, Ga.

J. B. LONDON, G. E. Co.
200 S. Tryon St., Charlotte, N. C.

G. O. MacFARLANE, G. E. Co.
8 N. Third St., Memphis, Tenn.

H. D. HAMRICH, G. E. Co.
P.O. Box 1293, Raleigh, N.C.

C. J. ELLIS, G. E. Co.
832 Georgia Ave., Chattanooga, Tenn.

F. A. HOEKE, G. E. Co.
602 S. Gay St., Knoxville, Tenn.

W. CROCKETT, G. E. Co.
234 Third Ave., Nashville, Tenn.

H. H. HENDEE, G. E. Co.
237 W. Forsyth St., Jacksonville, Fla.

S. Y. GUESS, G. E. Co.
1206 North A St., Tampa, Fla.

A. A. HERO, G. E. Co.
837 Gravier St., New Orleans, La.

SOUTHWEST DISTRICT

C. T. WANDRES, G. E. Co.
1801 N. Lamar St., Dallas, Texas

F. C. NEAL, G. E. Co.
1801 N. Lamar St., Dallas, Texas

A. H. KLEIN, G. E. Co.
408 W. Seventh St., Fort Worth, Texas

I. A. UHR, G. E. Co.
201 Villita St., San Antonio, Texas

J. B. BURR, G. E. Co.
1312 Live Oak St., Houston, Texas

D. H. HICKEY, G. E. Co.
109 N. Oregon St., El Paso, Texas

F. B. HATHAWAY, G. E. Co.
119 N. Robinson St.,
Oklahoma City, Okla.

R. G. SMITH, G. E. Co.
409 S. Boston St., Tulsa, Okla.

EAST CENTRAL DISTRICT

R. A. BUESCHER, G. E. Co.
4966 Woodland Ave., Cleveland, Ohio

L. M. KLENTZ, G. E. Co.
4966 Woodland Ave., Cleveland, Ohio

J. C. WILBURN, G. E. Co.
335 S. Main St., Akron, Ohio

W. H. REID, G. E. Co.
215 W. Third St., Cincinnati, Ohio

H. L. WILLSON, G. E. Co.
40 S. Third St., Columbus, Ohio

J. BOSWAY, G. E. Co.
25 N. Main St., Dayton, Ohio

G. C. CLARK, G. E. Co.
420 Madison Ave., Toledo, Ohio

R. C. WHITTEN, G. E. Co.
455 S. Fourth St., Louisville, Ky.

J. C. HARTLE, G. E. Co.
110 N. Illinois St., Indianapolis, Ind.

J. E. BAIN, G. E. Co.
123 N. W. Fourth St., Evansville, Ind.

J. C. MILLING, G. E. Co.
10 E. Twelfth St., Erie, Pa.

J. J. HORAN, G. E. Co.
1635 Broadway, Fort Wayne, Ind.

CENTRAL DISTRICT

G. S. PETERSON, G. E. Co.
Box 5970-A Van Buren St. P.O.
Chicago, Ill.

E. G. ABBOTT, G. E. Co.
840 S. Canal St., Chicago, Ill.

E. P. TOAL, G. E. Co.
12 S. 6th St., Minneapolis, Minn.

P. B. REED, G. E. Co.
12 S. 6th St., Minneapolis, Minn.

R. A. WEBSTER, G. E. Co.
14 W. Superior St., Duluth, Minn.

H. E. LONGMIRE, G. E. Co.
700 Antoinette St., Detroit, Mich.

M. T. LAWRENCE, G. E. Co.
148 Monroe Ave., N.W.,
Grand Rapids, Mich.

M. B. RANN, G. E. Co.
1509 Osborn Rd., Lansing, Mich.

I. F. CONRAD, G. E. Co.
112 N. Fourth St., St. Louis, Mo.

R. M. RYAN, G. E. Co.
106 W. 14th St., Kansas City, Mo.

C. E. SCHOONOVER, G. E. Co.
200 E. First St., Wichita, Kansas

R. C. HOGEN, G. E. Co.
409 S. 17th St., Omaha, Neb.

ROCKY MOUNTAIN DISTRICT

H. N. RAYMOND, G. E. Co.
200 S. Main St., Salt Lake City, Utah

F. C. O'KELLY, G. E. Co.
650 17th St., Denver, Colo.

C. A. CHAMPS, G. E. Co.
20 W. Granite St., Butte, Mont.

PACIFIC DISTRICT

H. A. CROSSLAND, G. E. Co.
235 Montgomery St., San Francisco, Calif.

E. A. WHITEHEAD, G. E. Co.
235 Montgomery St., San Francisco, Calif.

T. F. HALL, G. E. Co.
212 N. Vignes St., Los Angeles, Calif.

V. G. CALDWELL, G. E. Co.
212 N. Vignes St., Los Angeles, Calif.

R. B. GRAVITT, G. E. Co.
861 6th St., San Diego, Calif.

JOHN KLENKE
3871 50th Ave., N.E., Seattle, Wash.

C. R. WALLIS, G. E. Co.
821 2nd Ave., Seattle, Wash.

J. R. MURPHY, G. E. Co.
421 Riverside Ave., Spokane, Wash.

L. R. ELDER, G. E. Co.
920 S.W. 6th Ave., Portland, Ore.

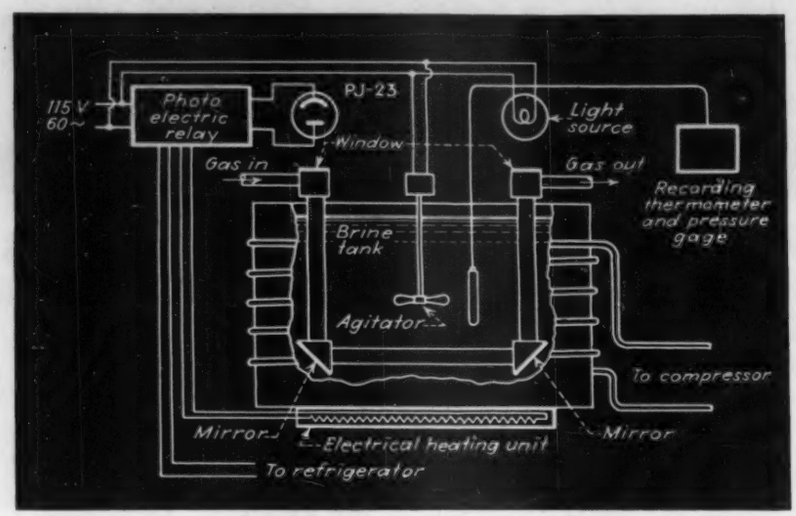

The gas in the U-shaped tube is alternately cooled just below and heated just above the dew-point by cooling coils and an electric heater controlled by a phototube relay which is operated by a light beam whose intensity is decreased by the presence of condensed moisture

dehydration if there is any danger of the moisture condensing and freezing.

A continuous flow from a bypass valve in the main line passes through a U-shaped tube which has a plate glass window at the top of each side of the U, glass mirrors at the square corners of the U as shown. The interior of the tube is gold plated and highly polished. A light source is located above one window and a phototube (type PJ-23) is located above the other window. If a film of moisture can be made to condense upon the glass and gold-plated surfaces, the intensity of the light beam reaching the phototube will be reduced. This can be done by immersing the U-tube in a brine bath cooled by cooling coils connected to a refrigerating compressor. When the moisture film appears, the cooling coils are cut off and a heating unit is turned on to heat the gas and evaporate the moisture at which time the heater is turned off and the cycle repeated. Measurements on a recording thermometer whose element is located in the brine bath will indicate that the temperature changes approximately according to a sine wave. In this installation the temperature difference between the tops and bottoms of the curves is about 2 to 3 degrees. The cycle of operation is about 10 to 15 minutes. The pressure of the gas is also recorded and the dew-point can be calculated from the records of temperature and pressure.—Setter, ELECTRONICS, November 1941, p. 72.

Photoelectric Cooling Control

AT THE TVA FERTILIZER WORKS phosphate ore is heated to a high temperature and crushed to sizes varying from fine dust to two inches in diameter. The phosphate must be cooled by a water spray on a moving conveyor before further processing, but if a continuous spray of water of sufficient capacity to cool the larger pieces is used, the finer and cooler material is flooded, making a mud that clogs the equipment.

The problem is to provide cooling water when it is necessary to cool large, hot pieces and to shut it off when the relatively cool smaller pieces are passing by on the conveyor. The solution is to use a phototube relay using tubes which are sensitive to infrared heat rays to operate a solenoid water valve. Three type CE-1 phototubes are mounted a few inches above the ore in the conveyer and a few inches ahead of the water nozzles to allow for the time delay in the relay and valve circuit. Because of the heat involved, the phototubes are mounted in a Pyrex glass cylinder and a current of air

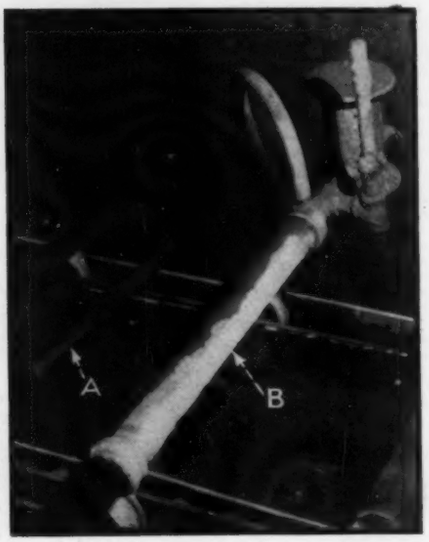

The actual setup showing the conveyor which moves from right to left. The water spray (A) is mounted away from the phototubes (B) to permit the ore to reach it before water flows

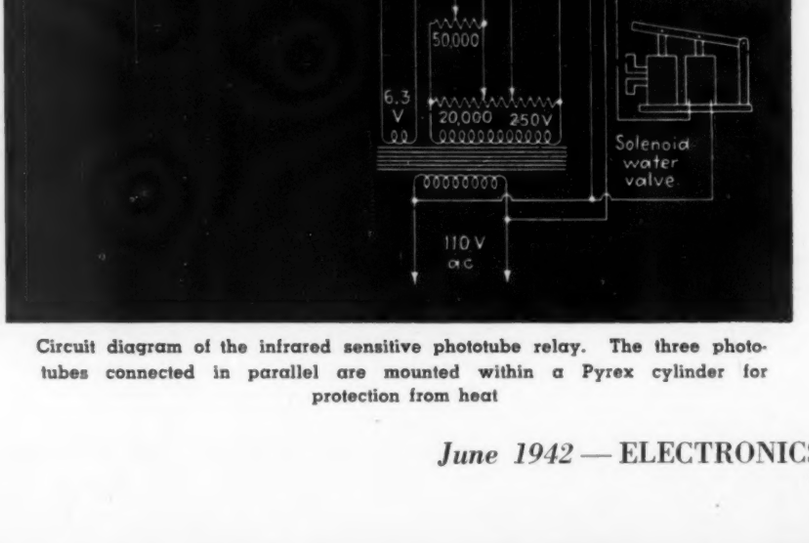

Circuit diagram of the infrared sensitive phototube relay. The three phototubes connected in parallel are mounted within a Pyrex cylinder for protection from heat

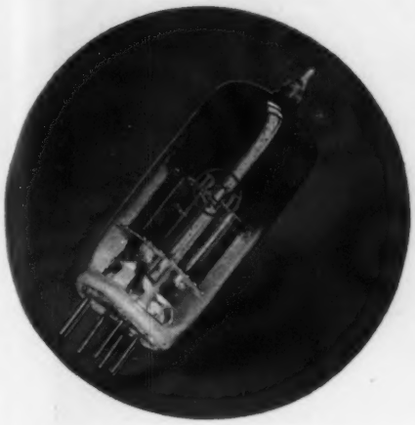

RCA 3A4

POWER AMPLIFIER PENTODE

Miniature Type (Tentative Data)

The 3A4 is a Miniature type of power amplifier pentode designed for use in compact, light-weight, portable equipment. The relatively large filament employed in the 3A4 enables it to supply the high peak currents required in r-f power applications. In r-f amplifier service, the 3A4 will deliver a power output of about 1.2 watts at 10 megacycles. The filament of the 3A4 can be operated either with series connection on 2.8 volts or parallel connection on 1.4 volts.

	*Series Filament Arrangement**	*Parallel Filament Arrangement***	
FILAMENT VOLTAGE (D.C.)	2.8	1.4	Volts
FILAMENT CURRENT	0.1	0.2	Amp.
DIRECT INTERELECTRODE CAPACITANCES:†			
Grid to Plate (C_{g_1p})		0.2 max.	μμf
Input [C_{g_1} (f & g_3 + g_2)]		4.9	μμf
Output [Cp(f & g_3 + g_2)]		4.2	μμf
MAXIMUM OVERALL LENGTH			2⅛"
MAXIMUM SEATED HEIGHT			1⅞"
MAXIMUM DIAMETER			¾"
BULB			T-5½
BASE		Miniature Button 7-Pin♦	
MOUNTING POSITION			Any

† With no external shield.

A-F POWER AMPLIFIER

PLATE VOLTAGE	150 max.	Volts
SCREEN VOLTAGE	90 max.	Volts
PLATE DISSIPATION	2 max.	Watts
SCREEN DISSIPATION	0.4 max.	Watt
TOTAL ZERO-SIGNAL CATHODE CURRENT††	18 max.	Ma.

Typical Operating Conditions and Characteristics —Class A_1 Amplifier‡

	*Parallel Filament Arrangement***		
Plate Voltage	135	150	Volts
Screen Voltage (Grid No. 2)	90	90	Volts
Grid Voltage (Grid No. 1)	−7.5	−8.4	Volts
Peak A-F Grid Voltage	7.5	8.4	Volts
Zero-Signal Plate Current	14.8	13.3	Ma.
Max.-Signal Plate Current	14.9	14.1	Ma.
Zero-Signal Screen Current	2.6	2.2	Ma.
Max.-Signal Screen Current	3.5	3.5	Ma.
Plate Resistance	90,000	100,000	Ohms
Transconductance	1900	1900	μmhos
Load Resistance	8000	8000	Ohms
Total Harmonic Distortion	5	6	%
Max.-Signal Power Output	0.6	0.7	Watt

R-F POWER AMPLIFIER

D-C PLATE VOLTAGE	150 max.	Volts
D-C SCREEN VOLT. (Grid No. 2)	135 max.	Volts
D-C GRID VOLT. (Grid. No. 1)	−30 max.	Volts
D-C PLATE CURRENT	20 max.	Ma.
D-C GRID CURRENT	0.25 max.	Ma.
TOTAL D-C CATH. CURRENT††	25 max.	Ma.
PLATE INPUT	3 max.	Watts
SCREEN INPUT	0.9 max.	Watt
PLATE DISSIPATION	2 max.	Watts

Typical Operation‡

	*Parallel Filament Arrangement***	
D-C Plate Voltage	150	Volts
D-C Screen Voltage	135	Volts
Grid Resistor	0.2	Meg.
D-C Plate Current	18.3	Ma.
D-C Screen Current	6.5	Ma.
D-C Grid Current	0.13	Ma.
Power Output (Approx.)	1.2	Watts

* Filament voltage applied across the two sections in series between pins No. 1 and No. 7. Grid voltage is referred to pin No. 1.

** Filament voltage applied across the two sections in parallel between pin No. 5 and pins No. 1 and No. 7 connected together. Grid voltage is referred to pin No. 5.

†† For series-filament operation, a shunting resistor must be connected across the section between pins No. 1 and No. 5 to by-pass excess cathode current in this section. The value of the shunting resistor should be adjusted to make the voltage across the shunted section equal to the voltage across the section between pins No. 5 and No. 7. When other tubes in series-filament arrangement contribute to the filament current of the 3A4, an additional shunting resistor may be required between pins No. 1 and No. 7.

‡ Typical operating values for the 3A4 with filament sections in series will be approximately the same as those shown for parallel-filament operation.

Ratings are to be interpreted according to RMA Standard M8-210 (Jan. 8, 1940 Rev. 11-40).

♦ See RCA 6C4

BOTTOM VIEW OF SOCKET CONNECTIONS

Pin 1—Filament (— for series operation)
Pin 2—Plate
Pin 3—Screen
Pin 4—Grid
Pin 5—Filament Mid-Tap (— for parallel operation), Grid No. 3
Pin 6—Plate
Pin 7—Filament (+)



RCA 3A5

H-F TWIN TRIODE

Miniature Type (Tentative Data)

The 3A5 is a twin triode of the Miniature type intended for use in high-frequency applications. The relatively large filament employed in the 3A5 enables it to supply the high peak currents required in r-f power applications. In class C service, a 3A5 with its units in push-pull will deliver a power output of approximately 2 watts at 40 megacycles. It may be used at still higher frequencies with reduced efficiency. Each triode may be used independently of the other. The filament of the 3A5 can be operated either with series connection on 2.8 volts or parallel connection on 1.4 volts.

	*Series Filament Arrangement**	*Parallel Filament Arrangement***	
FILAMENT VOLTAGE (D.C.)	2.8	1.4	Volts
FILAMENT CURRENT	0.11	0.22	Amp.
DIRECT INTERELECTRODE CAPACITANCES:†			
	Triode Unit T_1	*Triode Unit T_2*	
Grid to Plate (Cgp)	3.2	3.2	μμf
Grid to Filament (Cgf)	0.9	0.9	μμf
Plate to Filament (Cpf)	1.0	1.0	μμf
Plate to Plate ($C_{p_1p_2}$)		0.32	μμf
MAXIMUM OVERALL LENGTH			2⅜"
MAXIMUM SEATED HEIGHT			1⅞"
MAXIMUM DIAMETER			¾"
BULB			T-5½
BASE		Miniature Button 7-Pin♦	
MOUNTING POSITION			Any

† With no external shield.

A-F AMPLIFIER—Each Unit

PLATE VOLTAGE	135 max.	Volts
PLATE CURRENT	5 max.	Ma.
PLATE DISSIPATION	0.5 max.	Watt

Characteristics—Class A_1 Amplifier

Plate Voltage	90	Volts
Grid Voltage	−2.5	Volts
Amplification Factor	15	
Plate Resistance	8300	Ohms
Transconductance	1800	μmhos
Plate Current	3.7	Ma.

R-F POWER AMPLIFIER & OSCILLATOR—CLASS C TELEGRAPHY

D-C PLATE VOLTAGE	135 max.	Volts
D-C GRID VOLTAGE	−30 max.	Volts
D-C PLATE CURRENT (per unit)	15 max.	Ma.
D-C GRID CURRENT (per unit)	2.5 max.	Ma.
PLATE INPUT (per unit)	2.0 max.	Watts
PLATE DISSIPATION (per unit)	1.0 max.	Watt

Typical Operation at 40 Mc with Both Units:
Push-Pull Power Amplifier & Oscillator
(Key-down conditions per tube without modulation)

D-C Plate Voltage	135	Volts
D-C Grid Voltage		
From a fixed supply of	−20	Volts
From a grid resistor of	4000	Ohms
From a cathode resistor of	570	Ohms
Peak R-F Grid-to-Grid Voltage	90	Volts
D-C Plate Current	30	Ma.
D-C Grid Current (Approx.)	5	Ma.
Driving Power (Approx.)	0.2	Watt
Power Output (Approx.)	2	Watts

* Filament voltage applied across the two sections in series between pins No. 1 and No. 7. Grid voltage is referred to pin No. 1. For series-filament operation, a shunting resistor must be connected across the section between pins No. 1 and No. 4 to by-pass excess cathode current in this section. The value of the shunting resistor should be adjusted to make the voltage across the shunted section equal to the voltage across the section between pins No. 4 and No. 7. When other tubes in series-filament arrangement contribute to the filament current of the 3A5, an additional shunting resistor may be required between pins No. 1 and No. 7.

** Filament voltage applied across the two sections in parallel between pin No. 4 and pins No. 1 and No. 7 connected together. Grid voltage is referred to pins No. 1 and No. 7 tied together.

Ratings are to be interpreted according to RMA Standard M8-210 (Jan. 8, 1940 Rev. 11-40).

♦ See RCA 6C4

BOTTOM VIEW OF SOCKET CONNECTIONS

Pin 1—Filament (—)
Pin 2—Plate (Triode T_2)
Pin 3—Grid (Triode T_2)
Pin 4—Filament Mid-Tap (+ for parallel operation)
Pin 5—Grid (Triode T_1)
Pin 6—Plate (Triode T_1)
Pin 7—Filament (+ for series operation)



RCA MANUFACTURING CO., INC.
CAMDEN, NEW JERSEY

(NOTE: For additional copies of literature on these tubes, address RCA, Commercial Engineering Section, Harrison, N. J.)

is blown past them. Because of the dust conditions prevalent at ore treating plants, the relay is placed in a dust-proof glass container.

The sensitive relay has a drop-out current which is about 80 percent of its take-up current. The circuit may be adjusted to operate at any desired radiant heat by adjustment of the amplifier grid bias control (50,000-ohm potentiometer).—Ewald, ELECTRONICS, November, 1941, p. 55.

Photoflash Synchronizer Tester

TYPICAL FLASHLAMPS used in photography reach peak brilliancy 20 milliseconds after filament voltage is applied. Synchronizing devices must open the camera shutter in that short space of time if maximum illumination and film exposure are to coincide. A convenient instrument for determining the time required for a shutter to open measures it in terms of voltage attained by a condenser charging from a steady source of potential during that period.

A beam of light from a steady external source is directed into the type 917 phototube. The camera shutter to be actuated by the synchronizer is interposed in this beam of light. The input terminals of the testing device are substituted for the flashlamp, which is not used, in such a manner that when the synchronizer switch is closed the battery within the synchronizer is connected to the input terminals.

When the synchronizer switch is closed the negative bias applied to the control grid of the first type 2051 thyratron is reduced, causing this tube to conduct. Anode circuit capacitor C_1 starts to charge and continues to charge until the camera shutter blocking off the light beam opens. When the shutter opens the output of the phototube trips the second 2051, which reduces the voltage applied to the anode of the first thyratron by an amount equal to the drop in resistor R_1 sufficient to stop conduction in the first 2051. The capacitor is left with a definite charge, which may then be measured by means of the 6C5G tube connected as a vacuum tube voltmeter calibrated in milliseconds.—Marsal, ELECTRONICS, January, 1942, p. 34.

Width Gage for Moving Webs

THE WIDTH OF A continuously moving sheet or web of material may be measured during manufacture or processing even where the web shifts slightly from side to side while passing through the fabricating or finishing machine. One measurement system involves photoelectric scanning of each edge of the material, with mechanical movement of the web itself controlling the quantity of light transmitted and causing the beams to follow the material edges as they shift.

Considering one of the two scanning units involved, a light source is focussed upon a mirror fastened to the moving coil of a meter. The light is reflected by the mirror past the edge of the material into a phototube, the initial adjustment permitting the edge of the material to partially cut off the beam. The output of the phototube is fed into an amplifier and the output of the amplifier drives the meter carrying the mirror. Reduction in transmitted light by movement of the web deeper into the light beam changes the mirror angle and causes the beam to move away from the edge of the web until the initial condition of balance is restored. Movement of the web away from the light beam, conversely, increases the light received by the phototube and the meter moves the mirror in such a manner that the beam follows the edge.

The output of the scanning devices at either edge of the sheet or web is

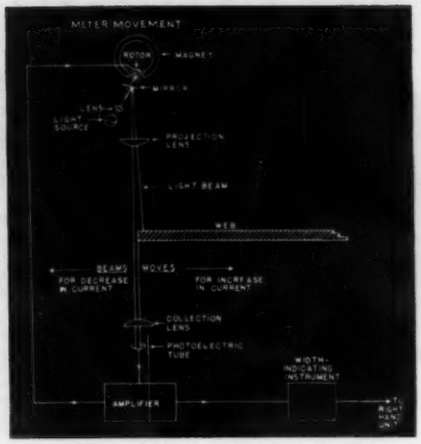

Width gage for moving webs. Two scanning devices are needed, one at each edge. Their outputs are combined in an electronic totalizer and indicator

combined in an electronic totalizing and indicating device. The indicating device may be calibrated in terms of width despite lateral shifts in the web as, with constant web width, the output of one amplifier declines while that of the other amplifier rises and vice versa, depending upon which way the web shifts. If the width of the measured web remains constant, in other words, shifts from side to side simply add current to the detector on one side and subtract a like amount from the other side, with the net result that there is no change in the position of the indicator. Increasing current indicates increased web width while decreasing current indicates decreasing web width as, under these conditions, amplifier output is additive or subtractive.—Alexander, ELECTRONICS, January, 1942, p. 66.

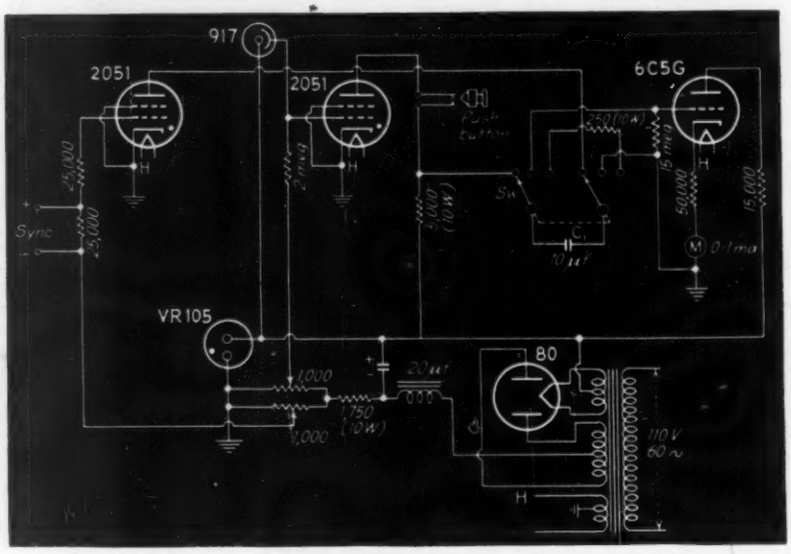

Photoflash synchronizer tester designed to measure the elapsed time between closing of the switch and opening of the camera shutter

*CATCH EVERY SIGNAL

* Cinch tube holders maintain tubes rigidly, an effective guard against shocks that distort reception. The added protection of the tube holder is a precaution when "*every* signal must be caught". Made of high quality spring steel, Cinch tube holders as illustrated are inexpensive and simple units for locking tubes in their sockets. "They're the Clincher".

CINCH MANUFACTURING CORPORATION · 2335 WEST VAN BUREN STREET · CHICAGO, ILLINOIS

SUBSIDIARY: UNITED-CARR FASTENER CORP. • CAMBRIDGE, MASS.

Investigate THIS NEW VACUUM TUBE VOLTMETER

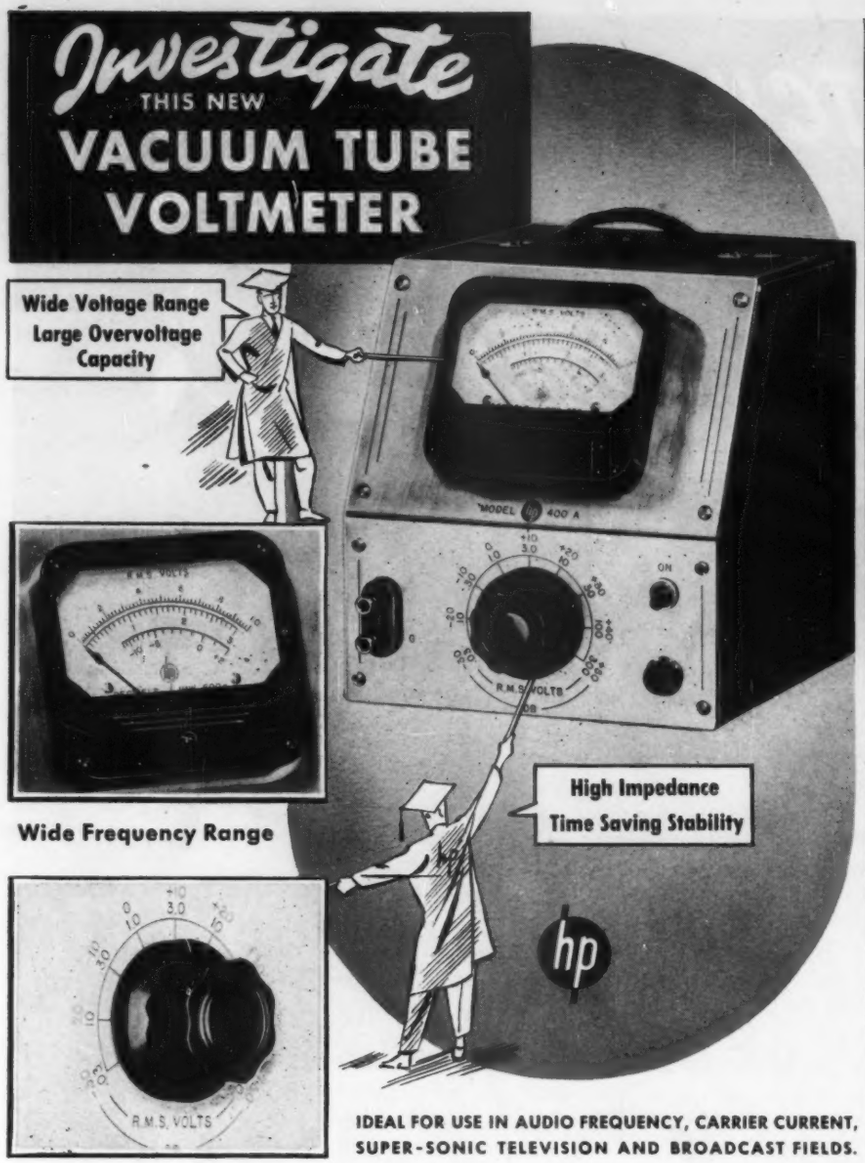

IDEAL FOR USE IN AUDIO FREQUENCY, CARRIER CURRENT, SUPER-SONIC TELEVISION AND BROADCAST FIELDS.

● This meter responds to the average value of the full wave . . . thus waveform errors are reduced. Measurements up to 1 megacycle with this Voltmeter are as simple as measurements with the usual multi-range meter at d-c! Generally, no precautions are necessary...no adjustments to make during operation . . . no damage from large overloads . . . and, input inpedance is high enough so that it won't affect the circuit being measured.

Think of the time you can save in production testing with the elimination of the need for adjusting to zero position during operation. It is ideally suited for audio frequencies from 10 cps to 20 kc and also for applications in carrier current work, in the super sonic, in television and throughout the broadcast field.

Get information about this new Voltmeter today. Write directly to the factory. There's no obligation, of course.

LABORATORY INSTRUMENTS

Chicago Office	*Hollywood Office*	*New York Office*
ALFRED CROSSLEY	N. B. NEELY	BRUCE O. BURLINGAME
Electro Products Laboratories	5334 Hollywood Boulevard	ASSOCIATES
549 West Randolph St., Chicago, Ill.	Hollywood, California	69 Murray St., New York City, N. Y.

HEWLETT-PACKARD COMPANY
BOX 135-A STATION A • PALO ALTO, CALIFORNIA

Static Beam Photoelectric Alarm

THE FIGURE SHOWS the schematic of a simple static beam photoelectric alarm device. Light from a distant source is directed across the area to be protected into the phototube. D-c output of the phototube is amplified by the 25L6 and holds a signalling device relay closed so long as the light is uninterrupted by an intruder.

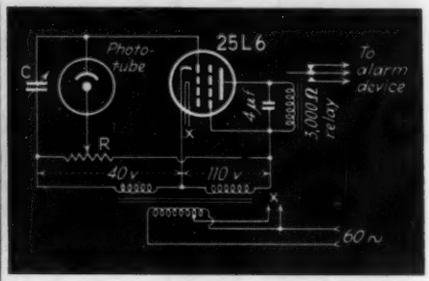

Simple static beamelectric alarm circuit. The 25L6 amplifier phototube self-rectifies its own operating potentials

Capacitor *C* provides a timing adjustment, the length of time required to discharge this capacitor when the beam is interrupted determining the speed with which the device operates. Resistor *R* is a sensitivity adjustment, permitting the bias on the 25L6 to be varied to suit the amount of light impinging upon the phototube.

In this elemental example d-c potentials required for the operation of the amplifier are obtained through self-rectification of applied a.c. by the 25L6 itself. A majority of static beam alarm devices now being made have d-c powerpacks supplying required operating potentials to the amplifier tube or tubes.—MacDonald, ELECTRONICS, February, 1942, p. 38.

Optical Filter Tester

LIGHT LOST IN TRANSMISSION through an optical filter may be measured by the following method:

A light source of constant intensity is focused upon a phototube. The phototube operates into an a-c amplifier driving a cathode-ray oscilloscope provided with a 60-cps sinusoidal sweep. An opaque disc or wheel in which there are two apertures directly opposite each other, one aperture containing the filter and the other left open, is placed in the path of the light beam

"KNOW-HOW"

Just as important to many customers as the quality of IRC fixed and variable resistors itself is the "Know-How" of resistor usage that IRC specialized experience makes available.

This "Know-How" is designed into IRC products. It is a big part of IRC customer service. It avoids mistakes in resistor specifications and orders. It simplifies matters of inspection and priorities. It clarifies many special technical problems. Above all, it means invaluable help in selecting the right resistor for the job —chosen without bias as to type from a line sufficiently broad to cover practically every requirement.

For the solution of a large number of the problems confronting the designing engineer, IRC has prepared the Resistor Chart which is yours for the asking. However, many special problems frequently arise requiring the "Know-How" of a trained staff of resistor engineers, which IRC has available.

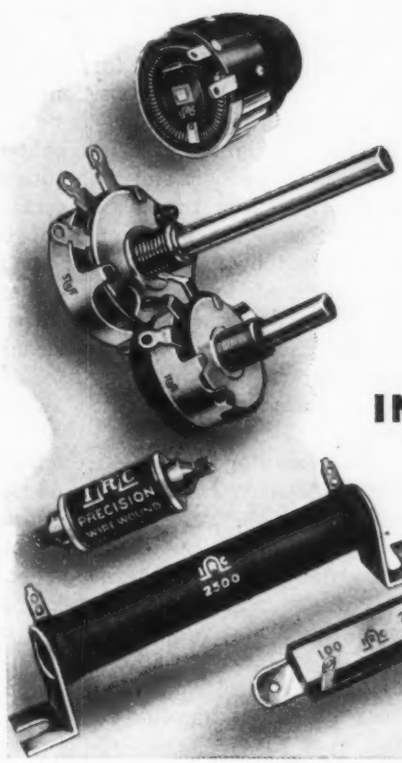

INTERNATIONAL RESISTANCE COMPANY

403 N. BROAD STREET, PHILADELPHIA, PA.

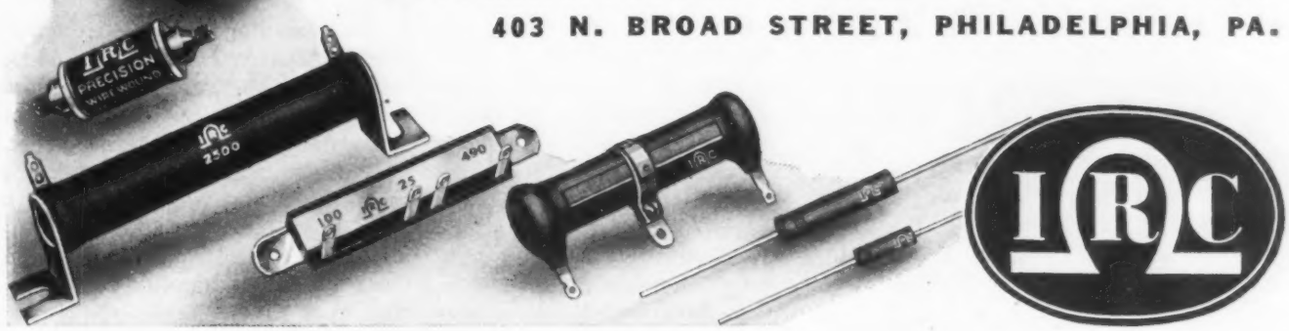

WE WANT MORE "IMPOSSIBLE" WAR ORDERS

Recently expanded War Production facilities permit our handling additional orders, regardless of the quantities required, for all types of coils and windings used at radio frequencies, intermediate frequencies, and audio frequencies. Please submit prints or samples (for duplication) with your inquiries.

★

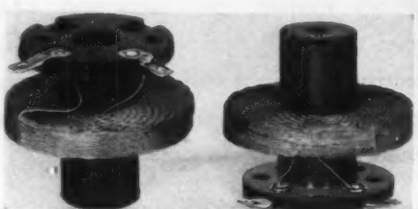

Illustrated above, the standard Bakelite bobbin, developed 15 years ago, has been found extremely useful for all types of r.f. choke coils and many tuned circuits with either air or powdered iron core tuning.

AUTOMATIC WINDING CO., Inc.

900 PASSAIC AVENUE

EAST NEWARK NEW JERSEY

in such a manner that the light shines alternately through the two apertures when the disc is rotated by a motor running at 1800 r.p.m.

Since such a disc revolves at 30 rps and there are two openings in the disc light will reach the phototube once each 60th second. A pattern similar to the one shown will be observed on the oscilloscope screen, the distance *B* indicating the amount of light reaching the phototube directly and the distance *A* indicating the amount of light reaching the phototube through the filter. Thus the ratio *A*/*B* represents the percentage light passing through the filter.

If the wavelength of maximum transmission is desired, this may be determined by passing the light from the source through a prism before passing it through the disc apertures. Angular movement of the prism will permit the wavelength of the light transmitted to the phototube to be varied.—Seeley and Anderson, *Review of Scientific Instruments*, August, 1941, p. 392.

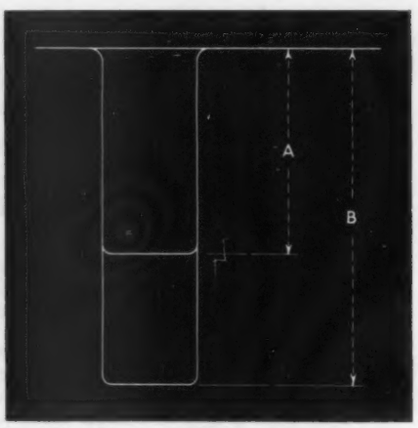

Cathode-ray oscilloscope pattern showing the relationship between light passed directly to a phototube and light passed to the phototube through an optical filter. *B* represent light transmitted directly and *A* light transmitted through the filter

Oil Hole Inspector

AUTOMATICALLY INSPECTING one shackle bolt per second, a photoelectric machine determines that oil holes drilled longitudinally through the bolts exactly meet other oil holes drilled into the bolt centers from the sides.

A beam of light is reflected from a mirror into the longitudinal hole while a bolt is revolved one complete turn by a rubber-tired driving wheel. If the quantity of light at which the device is calibrated fails to reach a phototube mounted adjacent to the side hole during some portion of this cycle, indicating imperfect alignment or a block, the bolt is automatically rejected by an electromechanical mechanism. — Powers, ELECTRONICS, September, 1939, p. 54.

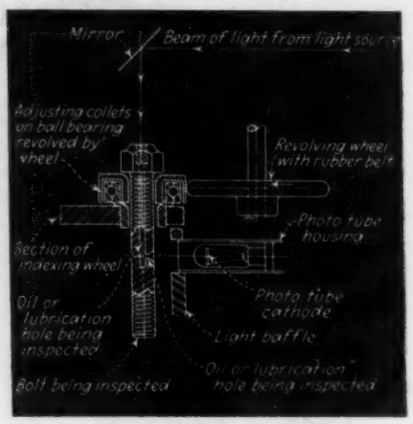
Mirror
Beam of light from light source
Adjusting collets on ball bearing revolved by wheel
Revolving wheel with rubber belt
Photo tube housing
Section of indexing wheel
Oil or lubrication hole being inspected
Photo tube cathode
Light baffle
Bolt being inspected
Oil or lubrication hole being inspected

Photoelectric oil-hole inspector

Articulated Weighing Scale

WEIGHING SCALES FREQUENTLY used to indicate one specific weight may be made to actuate an audible or visible signal when that weight is reached.

A small hole is drilled through the face of the scale at a position corresponding to the weight to be indicated. A light source is mounted in front of the hole and a phototube is placed back of the hole in such a manner that the beam of light is interrupted by the pointer or by a flag attached to the pointer when this weight is reached. The output of the phototube is amplified and, when interrupted, operates a relay which energizes the selected signal device.

The advantage of the electronic method of control in this instance is the fact that no error-producing load is introduced in the mechanism of the scale by the articulating device.

Editor's note — This hole-in-the scale device is widely used with phototubes for controlling mechanical or electrical quantities.—Kron Scale Co., ELECTRONICS, January, 1942, p. 60.

HYTRON now has QUADRUPLED space for war production

Hytron REMEMBERS PEARL HARBOR—Wake Island—Bataan—Corregidor. As its contribution to the swelling tide of production which will equip the nation with an overwhelming flood of war materials to avenge these temporary defeats, Hytron is developing at top speed the productive capacity of its new plant at nearby Newburyport. The new factory is so large that it could easily accommodate on one floor the entire Salem plant. In this appropriately-named radio war, Hytron's quadrupled facilities will play an important part in the production of vital electronic tubes to be used in making the enemy remember with regret his mistake in attacking the United States.

HYTRON CORPORATION

Manufacturers of electronic tubes since 1921

Newburyport . . . MASSACHUSETTS . . . Salem

MORE TUBES FOR VICTORY

RECEIVING — "GT", "G", or "acorns", R.M.A. or Government types, — twenty-two years of experience give you time-tested quality.

TRANSMITTING — Nationally famous u-h-f designs, popular instant-heating tubes for mobile use, standard Hytron triodes and rectifiers, all perform efficiently—dependably.

SPECIAL PURPOSE — From medium power tubes to tiny miniature types, Hytron welcomes the opportunity to manufacture in production quantities the specialized tubes you may need for your war production.

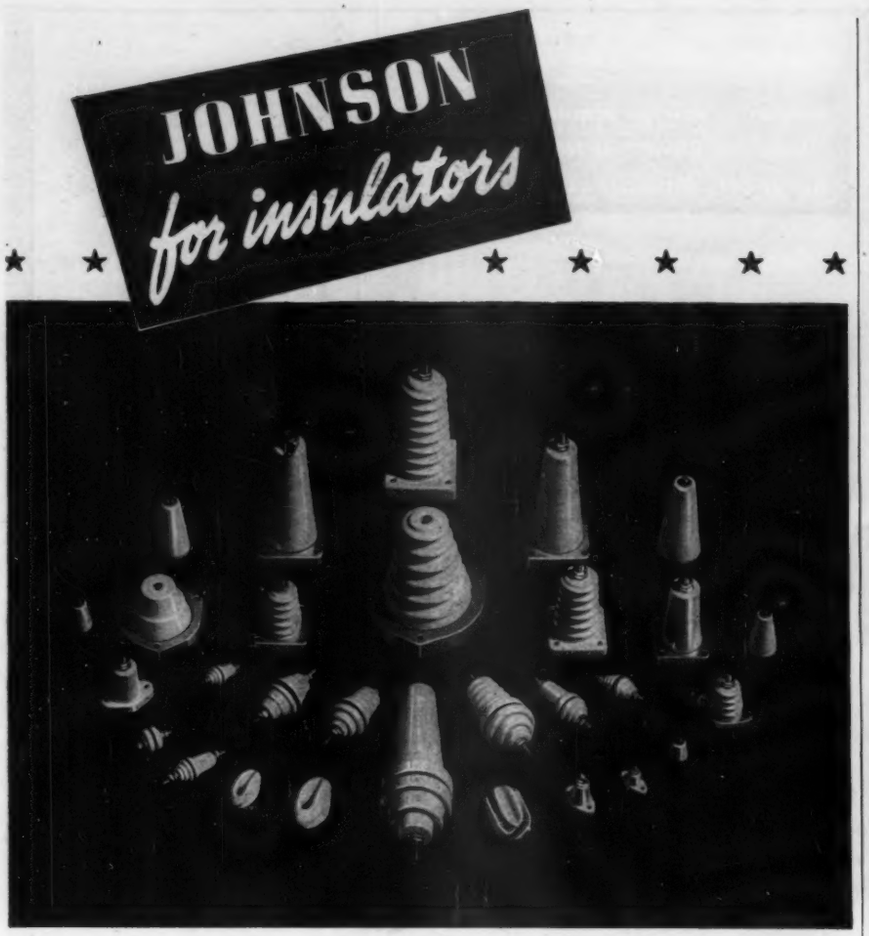

The famous Johnson insulator line is the most complete of any manufacturer. Designed by engineers for practical application, their quality, materials and excellence of workmanship are often imitated but never equalled. Nuts are carefully milled and heavily nickel plated, not cheap stamped unplated types. Studs have accurately cut threads held to a close tolerance and heavily plated. Inferior varieties use cheaper rolled threads that bind or strip easily. All Johnson insulators are made of the finest electrical porcelain or Steatite (depending on type) and are remarkably free from pin holes, impurities and imperfections. Substitutes are usually inferior porcelain or clay such as that used in dishes and pottery. Superior Johnson parts cost no more—why take chances?

Write us concerning your need. Johnson Engineers will recommend an insulator that will do the job better—often at a lower price. After all Johnson parts are GOOD parts. (Ask for Catalog 967D).

E. F. JOHNSON CO.
WASECA, MINNESOTA
EXPORT: 25 WARREN ST., NEW YORK, N. Y.
"MANUFACTURERS OF RADIO TRANSMITTING EQUIPMENT"

Measurement of Turbidity in Liquids

THE TURBIDITY OF ALMOST clear solutions can be measured by the extent to which a light beam is dispersed by the suspended particles. By the use of proper filters, colored solutions can also be measured. The method is to pass a collimated light beam through two grids consisting of alternate bars and open spaces with the sample and a lens system between them. The grids must be machined very accurately so that the two units are of the same dimensions and so that the bars and the open spaces are of the same size. After the light beam passes through the first grid it consists of several beams which are rectangular in cross section. A pair of 4-inch objective lenses is mounted in a slide for focussing.

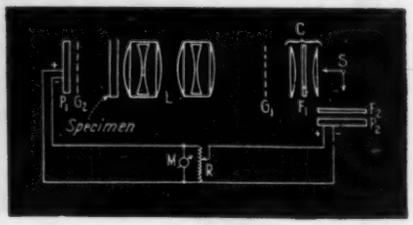

Diagram of the circuit and optical system of the photoelectric turbidimeter

The lens system is adjusted so that the light beam has unity magnification on the second grid. The second grid is positioned so that the rectangular portions of the light beam fall on the bars. Thus, no light gets past the second grid, except that which results from imperfect machining of the grids. Beyond the second grid is a barrier type photocell to detect any light. Another photocell is located near the light source as shown in the diagram and connected to a potentiometer across which are connected the first photocell and a microammeter. This is for the purpose of balancing out any light getting past the second grid.

When a liquid sample is placed between the two grids as shown, any suspended particles cause a dispersal of the light and permits it to pass through the openings of the second grid to the photocell where it is converted into electrical energy for measurement.—Silverman, *Review of Scientific Instruments*, February, 1941 (ELECTRONICS, April, 1941, p. 100).

WINCO

for magnet wire products that must do the job!

ENAMELED COPPER
ENAMELED IRON
ENAMELED ALLOY
ENAMELED ALUMINUM
TWISTED MULTIPLES
PARALLEL MULTIPLES

SILK COVERED
COTTON COVERED
CELANESE COVERED
GLASS FIBRE COVERED
LITZENDRAHT AND
SPECIALS TO ORDER

● There's more to present day engineering and design problems than shortages of materials, priorities, etc. There is also the question of whether specifications have been rigidly adhered to. Wire, for example, must meet such requirements as specific electrical properties, flexibility, tensile strength, laying speed, uniformity, etc.

Whether it's a buyer's or a seller's market, WINCO magnet wire products are drawn to exact specifications. Uniformity of product is guaranteed by mercury process tests and careful supervision guards against variations in consistency, structure or electrical values.

If you have a wire problem, our complete facilities are at your disposal. Send blueprints or specifications for recommendations, without obligation. Samples sent on request; write today.

WINSTED DIVISION

WINSTED HUDSON WIRE COMPANY CONNECTICUT

Daylight Measurement of Cloud Heights

THE HEIGHT OF CLOUDS above ground level is of utmost importance to aircraft operators and can be measured in daylight by means of a modulated light beam pointed vertically at the cloud, and a photoelectric detector unit and amplifier. The light source is an a-c operated high intensity mercury vapor lamp operated on 60-cps power. The modulation of the beam is about 95 percent and has a frequency of 120 cps. The detector system includes a lens system designed to pick up a cloud area no larger than that illuminated by the light beam to reduce the background light to a minimum. A type 929 phototube is used and its current is amplified by a five stage resistance-capacitance amplifier tuned to 120 cps. In practice, the base of the cloud is scanned by the detector until the output meter indicates that the light signal is being received. The computation of cloud height is a simple trigonometric problem making use of a known base line and one angle of a right triangle to determine the vertical leg, or height of the cloud.—*Electrical Engineering*, May 1941.

Stimulus—Electrical

(*Continued from page 74*)

electronic control equipment is inserted in series with this lead. The control comprises two ignitron tubes connected in such a manner that primary current flows through one tube on one half cycle and through the other tube on the other half cycle. When the ignitrons are conducting, circuit operation is precisely the same as outlined above. It will be obvious, however, that welding current may be started and stopped by starting and stopping ignitron conduction, using the ignitrons as an "electronic switch." It will also be apparent that the ignitrons may be used as an "electronic rheostat" if some means of causing them to fire at controllable points along each half cycle of a.c. is employed.

One method of controlling the ignitrons and thus controlling welding time or welding current or both is to connect thyratron tubes between ignitron anodes and igniters as shown. The thyratrons may be controlled by means of any conventional electronic timing circuit or by phase-shift methods described elsewhere in this issue and will, in turn, control the points along each half cycle at which associated ignitrons fire. No special provision for stopping ignitron current flow is required in this circuit as the tubes automatically cease conduction on half cycles of a.c. during which their anodes are negative with respect to their cathodes.—GENERAL ELECTRIC COMPANY, Instruction Manual.

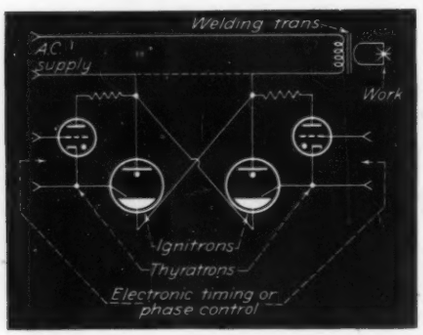

Resistance welding control circuit using ignitrons to control primary current and thyratrons to control the ignitrons

Motor Reversal and Speed Control

THE DIRECTION OF rotation and the speed of d-c motors may be controlled by means of the circuit shown. The motor field is operated from any suitable d-c source. Alternating current is applied to the motor field in series with two thyratron rectifiers connected "back to back." The thyratrons employed here are cut off unless their grids are made positive with respect to their cathodes. Throwing the control switch to the left makes the grid of thyratron *A* positive and that tube conducts. Half waves of current pass through the motor armature in one direction and the motor operates. Throwing the control switch to the right causes tube *B* to fire and the motor direction reverses.

If a variable inductance is included in the center arm of the control switch, as drawn, it will be possible to control motor speed as well as the direction of motor rotation. Varying the inductance shifts the phase of voltage applied to the thy-

TWO NEW FRANKLIN SOCKETS

NOW BEING MANUFACTURED FOR ARMY, NAVY AND SIGNAL CORPS REQUIREMENTS.



STEATITE CERAMIC SOCKET FOR U.H.F. ACORN TUBES—minimum electrical losses; special tempered, silver-plated, phosphor bronze contacts—minimum insertion pressure; snap-in contacts withstand severe vibration.

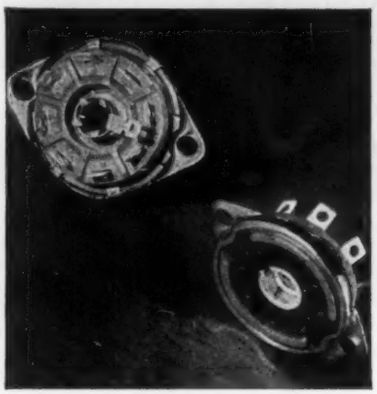

LOW LOSS MOLDED LOCK-IN TUBE SOCKET. Shell is special mica filled phenolic—efficient operation at higher frequencies. Revolutionary contact design—allows thousands of insertions and rotation of tube without contact failure. Locking spring of stainless steel—tension to maintain tube in position under severe vibration.

CHECK YOUR REQUIREMENTS WITH US. WE MAY BE ALREADY TOOLED UP TO MAKE THE PARTS YOU NEED.

FRANKLIN Can Help You STEP UP DEFENSE DELIVERIES

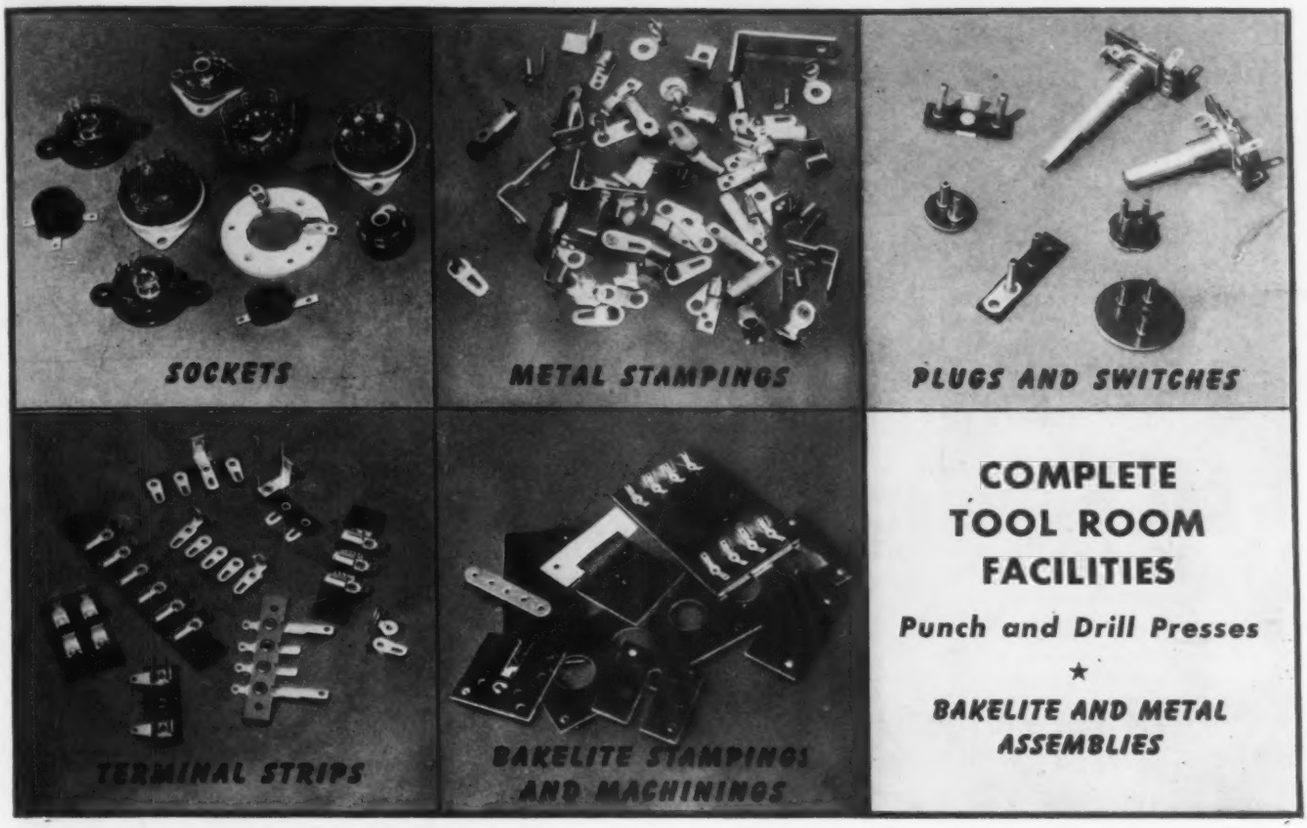

Ready for Large or Small Orders

WE have produced many millions of the above illustrated items for leading radio and electrical apparatus Manufacturers. Today we have the facilities to render similar service to any manufacturing organization engaged in defense production, in large or small quantities, standard or special designs. Quotations made promptly from your blueprints.

A. W. FRANKLIN MFG. CORP.

175 Varick Street **New York, N. Y.**

Telephone: WAlker 5-6037

WHY PAY FOR A FEW —when EMPIRE gives you ALL SEVEN!

GET THIS QUALITY INSULATION FOR YOUR ELECTRICAL EQUIPMENT, SPLICING, MOTOR REPAIR WORK

You're paying for all 7 of these advantages in any Varnished Cambric Tape or Cloth you buy. Why not specify EMPIRE—it costs no more to be sure of all 7.

Through years of experience and research, we have developed Empire Tapes and Cloth to the point where they earn top rating from every standpoint. Both equipment manufacturers and power companies have proved this in searching tests. And they back it up with orders and reorders whenever this type of material is needed.

If you need Varnished Tape or Cloth send the coupon for a stock sample of Empire. Subject it to your own tests for first-hand evidence of its all-round excellence.

USE THE COUPON TODAY! E. 6-42

MICA INSULATOR CO., Dept. 31, 198 Varick St., New York, N. Y.

Send me samples and prices of: Empire Straight Cut Cloth Yellow .007____ .010____ Black .007____ .010____

Empire Seamless Bias Tape Yellow .010____ Black .010____

*Name*_____ *Title*_____

*Company*_____

*Address*_____

ratron grids so that the conducting tube rectifies during part rather than all of a half cycle. Latitude of speed control is increased if the thyratron grid resistors are made variable.

Rapid motor braking may be achieved by using a control switch whose center arm normally contacts both grid return circuits. In this case both thyratrons fire alternately with the result that full wave a.c. is applied to the motor field. Inertia of the armature rotor will be sufficient to stop "hunting" by the motor as the polarity of voltage applied to the field changes. The closed core choke in series with the a-c supply is included to reduce current flowing through the armature when the motor is held at a standstill, saturation of the core of the choke reducing its inductance and avoiding serious voltage drop when the motor is operated. The fact that current flows in the

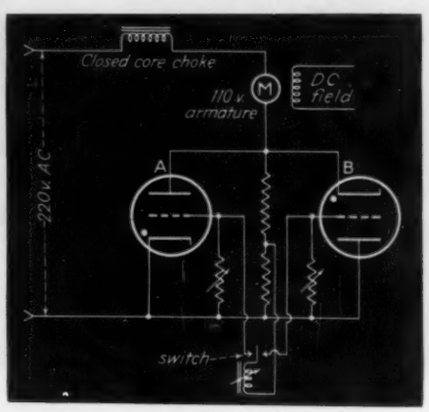

Direct-current motor control circuit. It permits the direction of rotation to be reversed, provides variable speed adjustment and lends itself to rapid motor braking

motor armature only on half cycles requires that the a-c supply have approximately twice the voltage required by the armature to compensate the voltage drop in the rectifying system.—Ryder, ELECTRONICS, December 1938, p. 20.

High Speed Stroboscopic Light Source

A COOPER-HEWITT mercury vapor lamp may be used as a source of high speed stroboscopic light for the observance or photographing of recurrent or transient phenomena. The circuit shown in simplified form provides control of timing and brilliancy.

TWO PARTS PER MILLION

The Type 815 Precision Fork is calibrated in terms of the G-R Primary Standard of Frequency. A harmonic of the frequency standard drives a 1,000-cycle motor to which is affixed a paper stroboscopic disc. The output of the Fork is amplified and flashes a G-R STROBOTAC, used to illuminate the stroboscopic disc. By counting the number of spots on the paper disc passing a given index per unit of time, the frequency of the fork can be measured to within a few parts per million.

A TYPICAL ILLUSTRATION of the care used in manufacturing and testing G-R equipment is the Type 815 Precision Fork, widely used as a low-frequency standard, in geophysical exploration, general laboratory testing, and in rating clocks and watches. These forks are supplied for frequencies of 50, 60 or 100 cycles. They are calibrated to an accuracy of two parts per million.

The material from which the forks are made is low-temperature-coefficient stainless steel, received from the supplier in the form of bars. As the temperature coefficient of different lots of steel varies, a sample fork is made from each new lot and the coefficient is obtained after a protracted temperature run.

From previously determined mechanical tolerances, the forks are then machined in our shop. The average fork as received from the shop is about two cycles below its nominal frequency. The initial frequency is measured to within one millicycle. From data previously obtained, the amount of material to be milled from the ends of the tines is determined and the fork is returned to the shop for the first rough adjustment. A second check to within one millicycle is then made and if necessary the fork is returned to the shop again for further adjustment. Occasionally a third rough check and adjustment are required.

The fork is then ready for final adjustment and calibration. A hole is drilled and tapped in the end of each tine to receive two adjustable loading screws. The frequency is measured to within one millicycle with both tine holes empty, with an inner tine screw in each hole and then with an outer tine screw set up tightly against the first screw. From these measurements the approximate amount of material to be cut from the tine screws to bring the frequency very close to its nominal value is ascertained.

The fork is then allowed to run for a half-hour at a controlled temperature of 77 degrees F. after which the final frequency measurement is made. Appropriate adjustments of the tine screws set the frequency to within 0.001% of the nominal value. The voltage coefficient of frequency is now obtained. This is approximately 0.005% per volt. The output voltage and harmonic content are then measured.

The forks are then placed in stock. When orders are received the forks are returned to the laboratory and the frequency is measured at a driving voltage of exactly four volts. A calibration certificate showing the exact frequency to within 0.002% at a stated temperature between 70 and 80 degrees F., and showing the temperature and voltage coefficients of frequency is supplied with each fork.

GENERAL RADIO COMPANY

CAMBRIDGE, MASSACHUSETTS

Branches in New York and Los Angeles

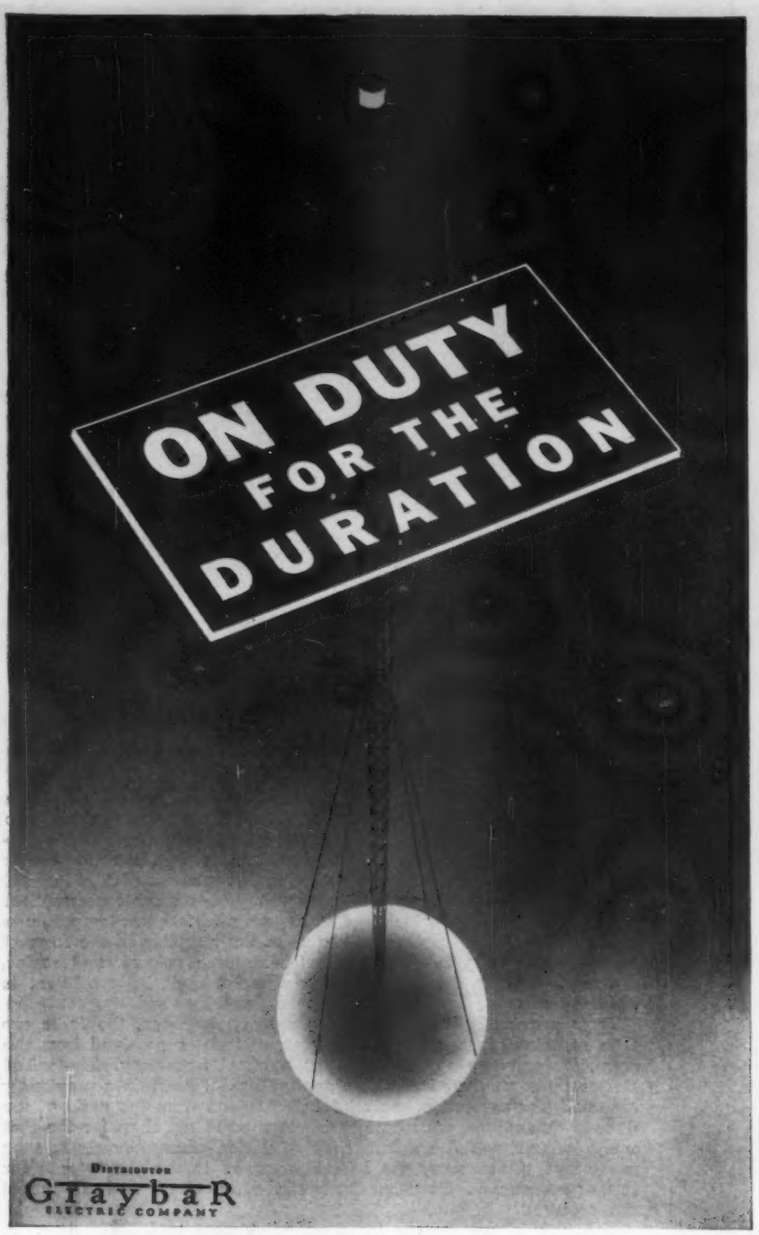

The American broadcasting industry contributes to America's strength by keeping the people informed, by increasing public morale, by promoting national unity. It is a heartwarming fact to every member of the Blaw-Knox organization that more than 70% of the towers in the nation are Blaw-Knox built.

BLAW-KNOX DIVISION of Blaw-Knox Co.
2077 Farmers Bank Bldg. Pittsburgh, Pa.

BLAW-KNOX
VERTICAL
RADIATORS
FM AND TELEVISION TOWERS

The thyratron tube is triggered at the rate required to "stop" motion of the observed subject by an electronic voltage pulse generator such as a relaxation oscillator. When the grid of the thyratron goes positive with respect to its cathode the tube fires and capacitor C_1 discharges through the transformer primary, producing an extremely high voltage in the transformer secondary. This voltage appears as an electrostatic potential between the mercury and shield of the lamp and ionizes mercury vapor in one corner of the lamp.

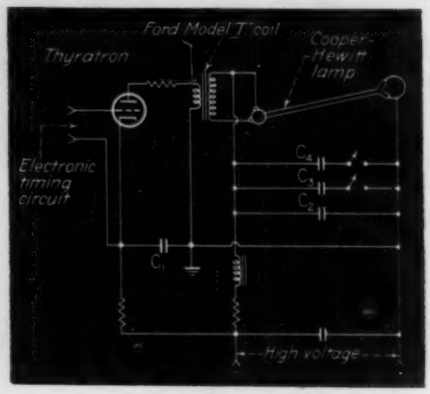

A Cooper-Hewitt mercury vapor lamp connected in the circuit shown makes a good high speed stroboscopic light source. A lamp that has been retired from regular illuminating service because of starting difficulty will fire satisfactorily in this circuit

The high voltage power supply connected across the ends of the lamp causes further ionization and capacitor C_2 discharges through the Cooper-Hewitt. Additional brilliancy may be obtained by closing one or both switches, connecting C_3 and C_4 in parallel with C_2. The associated electronic timing circuit regains control of the thyratron by swinging the thyratron grid sharply negative soon after C_1 discharges, at which time the anode voltage is at a minimum. —Street, ELECTRONICS, April, 1940, p. 36.

Stimulus–Physical or Chemical

(*Continued from page* 76)

Motor Speed Checker

THE SPEED OF SMALL motors may be determined under conditions approximating no-load by the method shown in the diagram.

A small metal fitting, *A*, is fastened

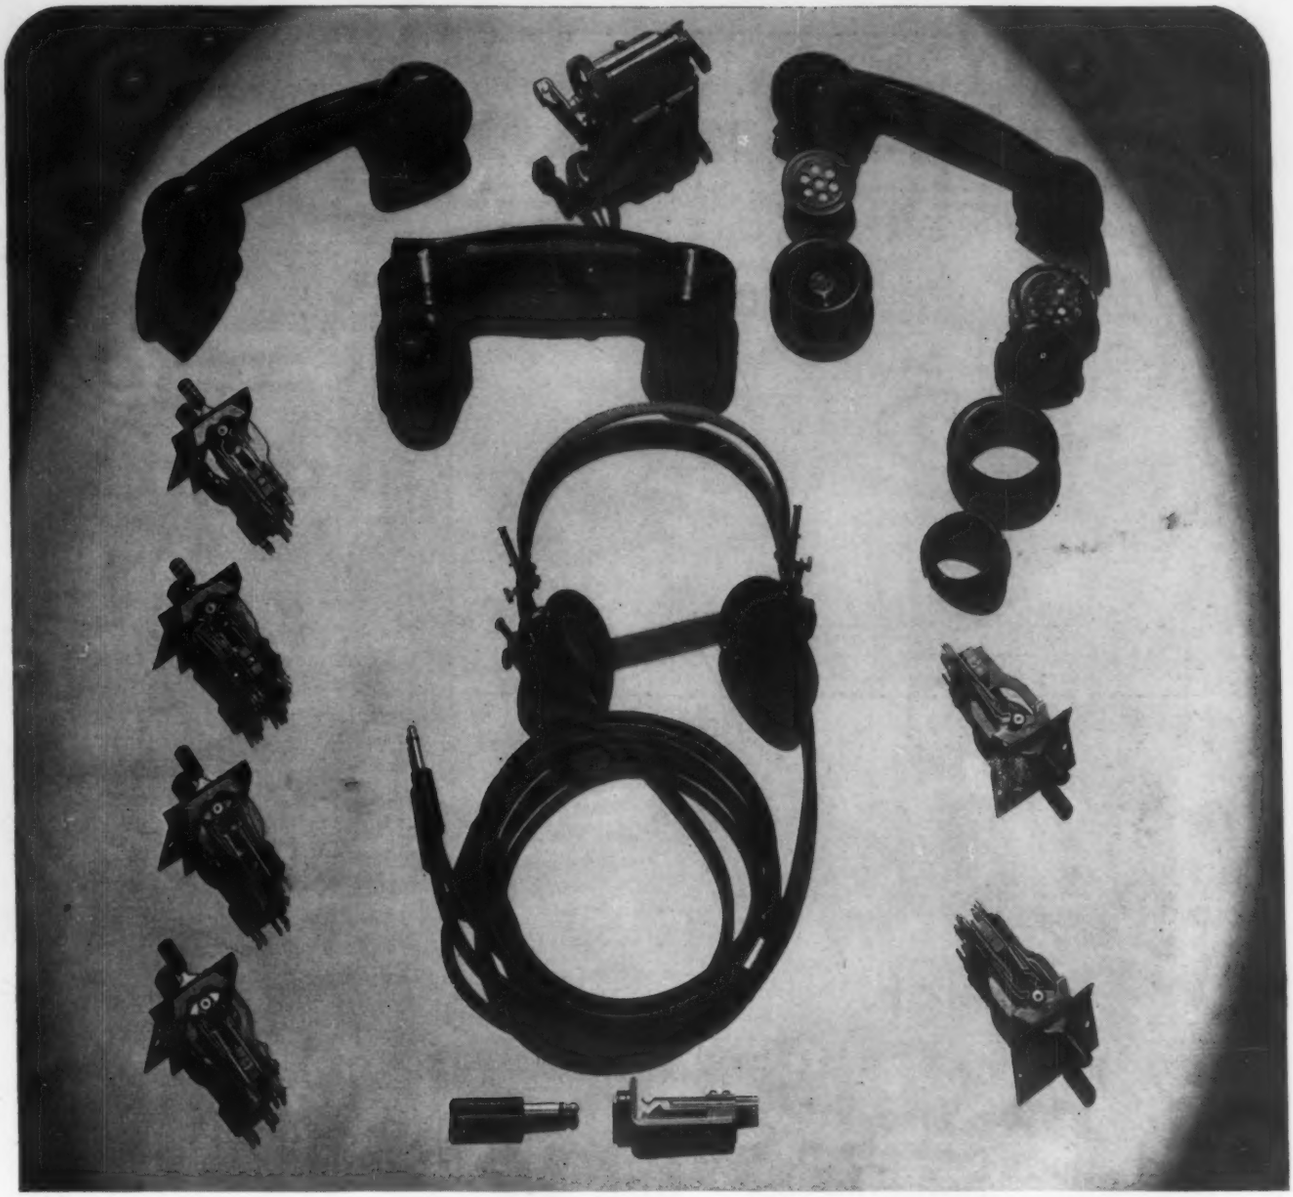

Illustrated: *a few typical examples of the many precision electrical products Connecticut is equipped to manufacture in volume.*

CONNECTICUT Telephone and Electric Corporation is a pioneer in the engineering and manufacturing of signaling, communications and other advanced electrical devices and equipment * Experience since the early days of the telephone has enabled Connecticut to meet the exacting requirements of all branches of the service in two wars. Its energies are now wholly devoted to production for the armed forces of the United Nations * The return of peace will find Connecticut ready with many significant new developments for civilian living. Its facilities for complete product fabrication within its own plant will be even more extensive than at present. And methods for applying Connecticut's laboratory standards of precision in mass production will be still further advanced.

CONNECTICUT TELEPHONE & ELECTRIC CORPORATION
Meriden, Connecticut

Research • Engineering • Precision Manufacturing Since 1894

KURMAN RELAYS
for Keying..Aircraft Control *and* Communications



Series 5

Designed to your specifications to operate under extreme conditions of humidity, vibration, shock and temperature.

Series 10

GUIDE TO KURMAN RELAY SPECIFICATIONS

SERIES	RATED INPUT DC WATTS	RATED INPUT AC V.A.	AMPERE CONTACT RATING	WEIGHT OUNCES	DIMENSIONS INCHES
5	2.5	8.0	15	7½	3x2 ¼ x2 ⅛
10	.35	—	.5	1½	1 ⅛ x1x1 ⅛
11	.80	4.4	1	2⅛	1 ¾ x 1⅜ x1 ¾
12	.018	—	.25	1½	1 ⅜ x1 ⅛ x ⅜
15	2.0	6.0	1	3⅜	1 ¾ x1 ⅛ x1 ¾
25	2.0	4.0	10	4	2 ⅛ x1 ⅝ x1 ⅛
200	.014	.36	3	6¾	2 ⅝ x2 ⅝ x1 ⅝
300	.014	.36	3	6⅝	2 ⅝ x2 ⅝ x1 ⅝

NOTES

I. All current contact ratings are in amperes at 110 volts 60 cycle AC.
II. Dielectric strength of 1500 volts exists between contacts and ground in Series 10, 11, 15.
III. Insulated armature, shown on Series 300, is recommended for high frequency transfer. This feature may be specified for Series 200.
IV. Ferronickel alloy is used in the magnetic circuits for Series 10, 12, 200, 300.
V. Ceramic insulation in Series 25 permits high frequency transfer with low capacitive leakage.
VI. Dampened armature action in Series 25 is designed to reduce contact bounce after initial pull down.
VII. Rated watts represents practical minimum input at standard adjustments.
VIII. AC relays have approximately .5 power factor.
IX. List prices vary with specific voltage and insulation requirements.



Series 11



Series 12



Series 15



Series 25



Series 200



Series 300

KURMAN ELECTRIC CO., INC.

241 Lafayette Street **New York, N. Y.**

RELAYS • TEST EQUIPMENT • CONTROLS

Manufacturers of Relays since 1920.

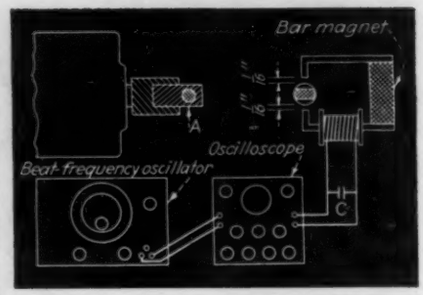

Set-up for measuring the speed of small motors without introducing a load in the measurement process

to the motor shaft and acts as the rotor element of an a-c generator. The frequency of the a.c. generated in the coil surrounding the magnet of the generator is directly proportional to the speed of the motor and can be used as the basis of a comparison measurement. The output of the coil is connected to the vertical deflection plates of a cathode-ray oscilloscope, while the horizontal plates lead to a beat-frequency oscillator whose frequency calibration may be marked directly in rpm. The beat frequency is adjusted until the pattern formed on the oscilloscope is a simple ellipse, which is the Lissajous figure indicating that the two oscilloscope input frequencies are the same.

The a-c generator does not produce a true sine-wave but the harmonics introduced may be attenuated by the capacitance *C*, connected across the generator output.—Clough Brengle, ELECTRONICS, October, 1939, p. 47.

Temperature Control

A CONTROL FOR maintaining the temperature of any enclosed chamber within a few thousandths of a degree has been developed in the laboratories of the Shell Development Co. It uses a resistance thermometer controlling a thyratron tube through a phase-shifting network. The resistance changes with temperature and therefore is useful for converting a temperature change into a voltage change the thermometer is located in the chamber and is connected in a Wheatstone bridge circuit to which is applied a 60-cps voltage. When the bridge is balanced the temperature is at the desired point and nothing happens. If, however, the temperature falls below the

INTRICATE CERAMIC PARTS

PRODUCED WITHOUT SPECIAL TOOLS

WHEN special ceramic parts are required in small quantities for vital wartime applications, the adaptability of Isolantite* to the production of intricate shapes is a feature of major importance.

Through years of experience in the manufacture of steatite ceramics, Isolantite Inc. has developed fabricating techniques that permit the production of intricate shapes without the necessity of providing expensive special tools. In addition, Isolantite's manufacturing processes permit extremely close dimensional tolerances as compared with general ceramic requirements. Critical dimensions can be held within close limits to facilitate equipment assembly.

Suitability for the production of intricate shapes to accurate dimensions is only one of Isolantite's many advantages. Uniformity of product, high mechanical strength, electrical efficiency, nonabsorption of moisture—these factors all contribute to dependable insulation performance. Because of its unique combination of properties in a single ceramic body, Isolantite is the choice of leading manufacturers, not only in the high-frequency fields, but for all applications where high-grade insulation is required in intricate shapes.

ISOLANTITE

CERAMIC INSULATORS

ISOLANTITE INC., BELLEVILLE, NEW JERSEY

*Registered trade-name for the products of Isolantite Inc.

FROM PLANES TO PENCIL POINTERS

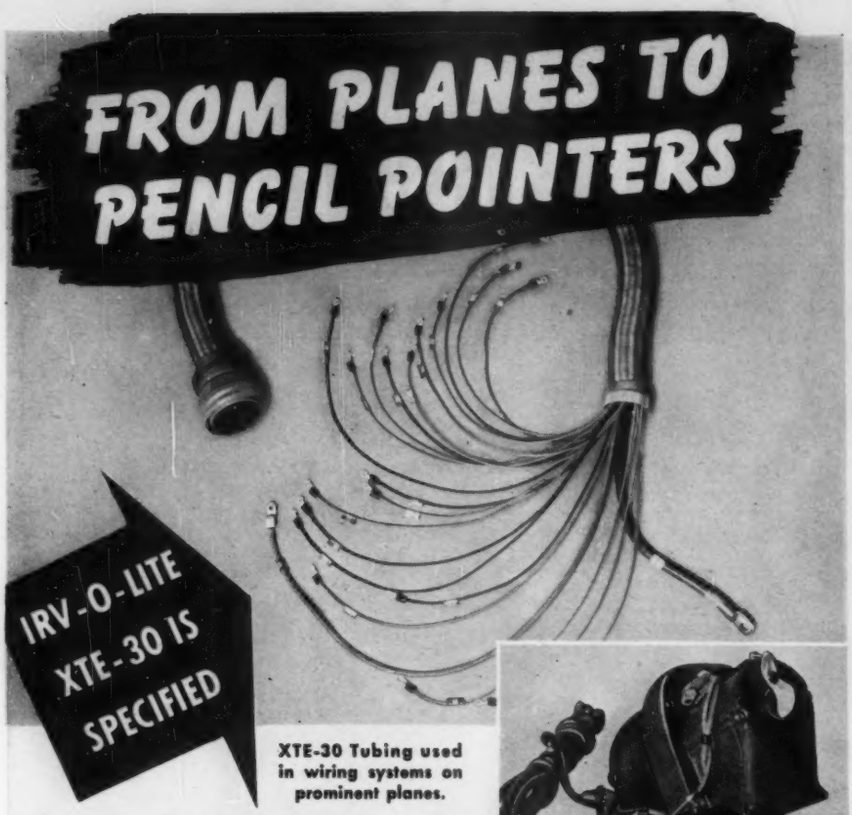

XTE-30 Tubing used in wiring systems on prominent planes.

On planes, pencil pointing machines and other equipment requiring protection of electric circuits, IRV-O-LITE XTE-30 Extruded Plastic Tubing provides lasting insulation. Many manufacturers of terminals, lugs, motors, electric appliances, electronic devices and instruments use IRV-O-LITE XTE-30 to guard against short circuits and grounds caused by insulation failure.

The choice of IRV-O-LITE XTE-30 Extruded Plastic Tubing by so many companies in widely varied fields is accounted for by the advantages this Fibronized Tubing provides.

HIGH DIELECTRIC STRENGTH– Dry – 750 VPM: Wet –350 VPM.

FLEXIBILITY–So elastic it can be flexed on itself with wire inside without cracking.

HEAT RESISTANCE–Withstands soldering temperature. Will not support combustion.

CHEMICAL RESISTANCE– Is not affected by denatured alcohol, petroleum, gasoline, concentrated acids and alkalies, and most coal tar solvents.

TENSILE STRENGTH–2150 lbs. per sq. in. IRV-O-LITE resists wear, tear and abrasion.

SMOOTH WALLS– Inside and out for easy assembly.

CONTINUOUS LENGTHS– Cut down waste.

SIX STANDARD COLORS–Colors: black, green, white, yellow, red, blue, simplify identification of wires after installation.

WIDE RANGE OF SIZES– From No. 24 to 1½" I.D. This thin-walled tubing with its high dielectric strength saves space in intricate and crowded installations.

Test the qualities of IRV-O-LITE XTE-30 yourself. Write Dept. 106 for samples, complete product information and prices.

IRV-O-LITE XTE-30 provides insulation on the Triple "E" Products Company, St. Louis Electro-Pointer Pencil Sharpener.

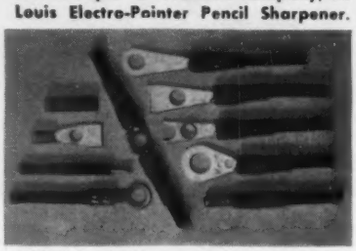

Added insulating protection is given to solderless wiring devices with IRV-O-LITE XTE-30.

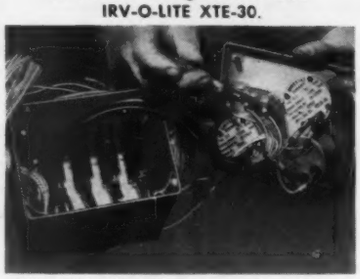

IRV-O-LITE XTE-30 is used as insulation on parts for famous planes.

OTHER IRVINGTON TUBING

IRV-O-LITE XTE-100
For use where higher dielectric strength and temperatures are encountered.

TRANSFLEX
The new transparent plastic tubing that resists brittleness down to –58° F.

IRVINGTON
VARNISH AND INSULATOR CO.
IRVINGTON, NEW JERSEY, U. S. A.
Plants at Irvington, N. J. and Hamilton, Ont., Can. Representatives in 20 Principal Cities

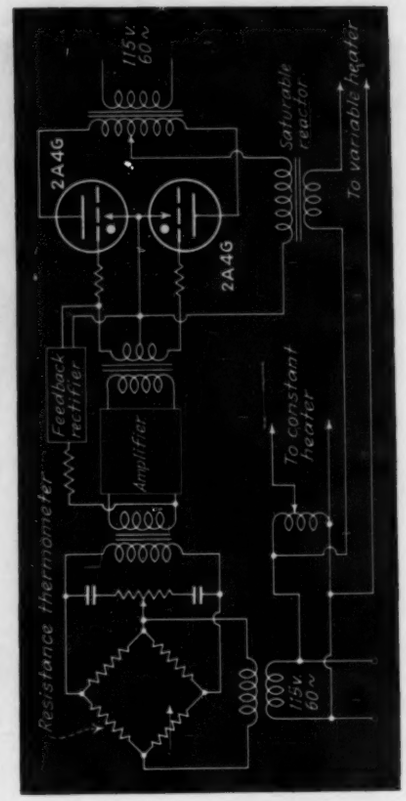

Simplified circuit diagram to show the principle of operation of the temperature controller. A voltage appears across the output of the Wheatstone bridge when unbalance occurs, its phase is shifted, it is amplified to fire two thyratrons (2A4G), and control the heating element through a saturable reacter

desired point, the resistance thermometer changes in resistance by a very small amount and the balance of the Wheatstone bridge is upset. There is then a voltage across the output of the bridge and this is fed into the phase shifting network and the primary of a transformer. The voltage developed across the secondary of the transformer is now out of phase with the line voltage by an amount depending on the phase shifting network and it is fed through a two-stage amplifier. The output of the amplifier, even with temperature changes of a few thousandths of a degree in the chamber, is sufficient to operate the two 2A4G thyratrons. The amplified out-of-phase voltage is applied to the grids of the thyratrons and a voltage 180 degrees out of phase with line voltage (a step-up transformer is used) is applied to the anodes. The thyratron pass anode current whenever a very slight decrease in temperature in the chamber occurs. The anode current must be made to control the application of heat to the chamber. In this case, the anode current is

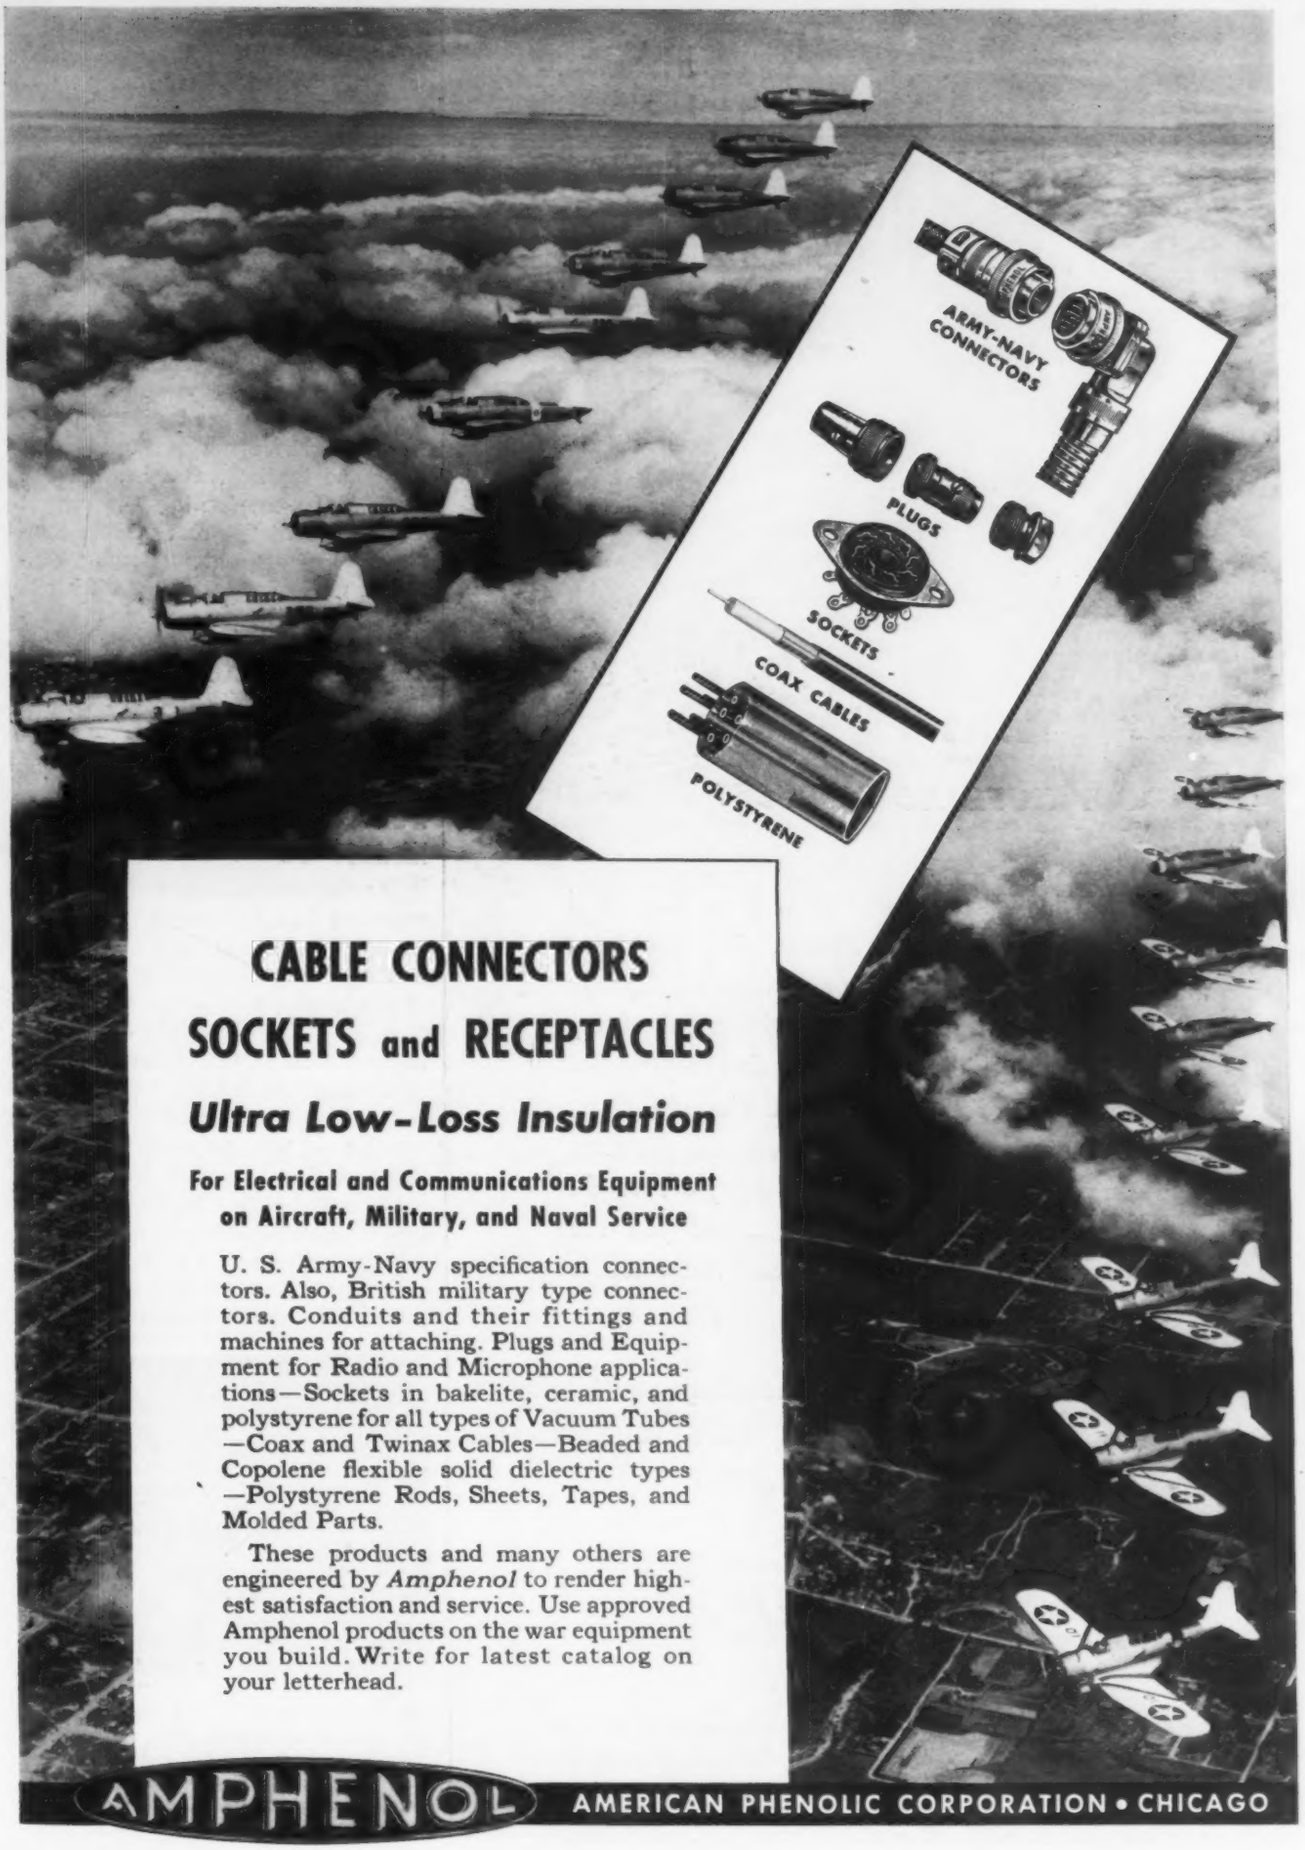

CABLE CONNECTORS SOCKETS and RECEPTACLES

Ultra Low-Loss Insulation

For Electrical and Communications Equipment on Aircraft, Military, and Naval Service

U. S. Army-Navy specification connectors. Also, British military type connectors. Conduits and their fittings and machines for attaching. Plugs and Equipment for Radio and Microphone applications—Sockets in bakelite, ceramic, and polystyrene for all types of Vacuum Tubes—Coax and Twinax Cables—Beaded and Copolene flexible solid dielectric types—Polystyrene Rods, Sheets, Tapes, and Molded Parts.

These products and many others are engineered by *Amphenol* to render highest satisfaction and service. Use approved Amphenol products on the war equipment you build. Write for latest catalog on your letterhead.

AMPHENOL AMERICAN PHENOLIC CORPORATION • CHICAGO

TRY AT OUR EXPENSE!

The New GOULD-MOODY "BLACK SEAL" GLASS BASE INSTANTANEOUS RECORDING BLANKS

- A thin, flexible glass base disc
- A medium weight glass base disc
- Both with two or four holes
- All glass throughout... they contain no fibre or foreign material inserts
- No metal gromets to "wow" or rumble
- Holes precision machined in the glass
- Priced at less than other fine brands
- Immediate delivery anywhere in U. S. A.
- Old aluminum blanks can be recoated with "Black Seal" formula in 24 hours

Based on unbiased reports from tests conducted by station engineers in major studios, and under normal operating conditions, *"no better instantaneous recording blank was ever made."*

YOU'VE GOT NOTHING TO LOSE!

HERE'S OUR GUARANTEE! Send for a trial order of "Black Seal" Blanks. We guarantee that they are as good as, or superior to, any disc you have ever used. If, after giving them every test you can think of, you find that they do not live up to our claims, return the unused discs, and keep the used ones with our compliments. You've got nothing to lose. We pay the freight both ways! You don't pay unless you are satisfied! Remember—you won't know unless you try!

For Transcriptions, Professional Recordings and Libraries, Gould-Moody "Black Seal" Glass Base Instantaneous Recording Blanks "Speak for Themselves"

Write for trial order or complete information today. All accounts serviced with styli and shipping cartons at actual cost. 10", 12" and 16" sizes, with 2 or 4 holes.

THE GOULD-MOODY COMPANY

RECORDING BLANK DIVISION • 395 BROADWAY • NEW YORK, N. Y.

passed through a saturable reactor, one winding of which is in series with the power line and an electric heater. When zero current passes through the saturable reactor, the heater winding acts as a current-limiting reactor and no voltage is applied to the heater. However, when current does flow through it, it becomes saturated and the inductance drops to a very low value. Voltage is applied to the heating element whenever thyratron current flows. When the temperature reaches the desired level, the bridge is again balanced, thyratron anode current flows and application of heat ceases.

To avoid overloading the circuit when a relatively great drop in temperature occurs, automatic gain control is used on the amplifier. This is obtained by the application of automatic bias control derived from part of the output transformer.—Penther and Pompeo, ELECTRONICS, April 1941, p. 20.

Sensitive Contact Indicator

A SO-CALLED "MAGIC-EYE" cathode-ray tube (used as tuning indicators in radio receivers) may be used as a simple and inexpensive indicator of the precise moment at which two metallic bodies touch. Used in connection with an interferometer type strain-gage calibrator, for example, it has been found that the relative position of two polished steel surfaces at the instant of contact will be indicated with a maximum variation of four millionths of an inch on successive tests.

Referring to the figure, the grid of the 6E5 is biased sufficiently nega-

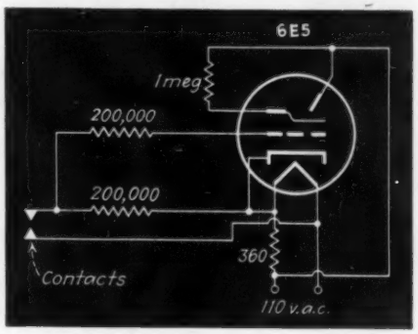

Sensitive contact indicator. The target of the tube is illuminated when the contacts touch, a useful indication method for use in connection with micrometers, interferometers and other measuring instruments

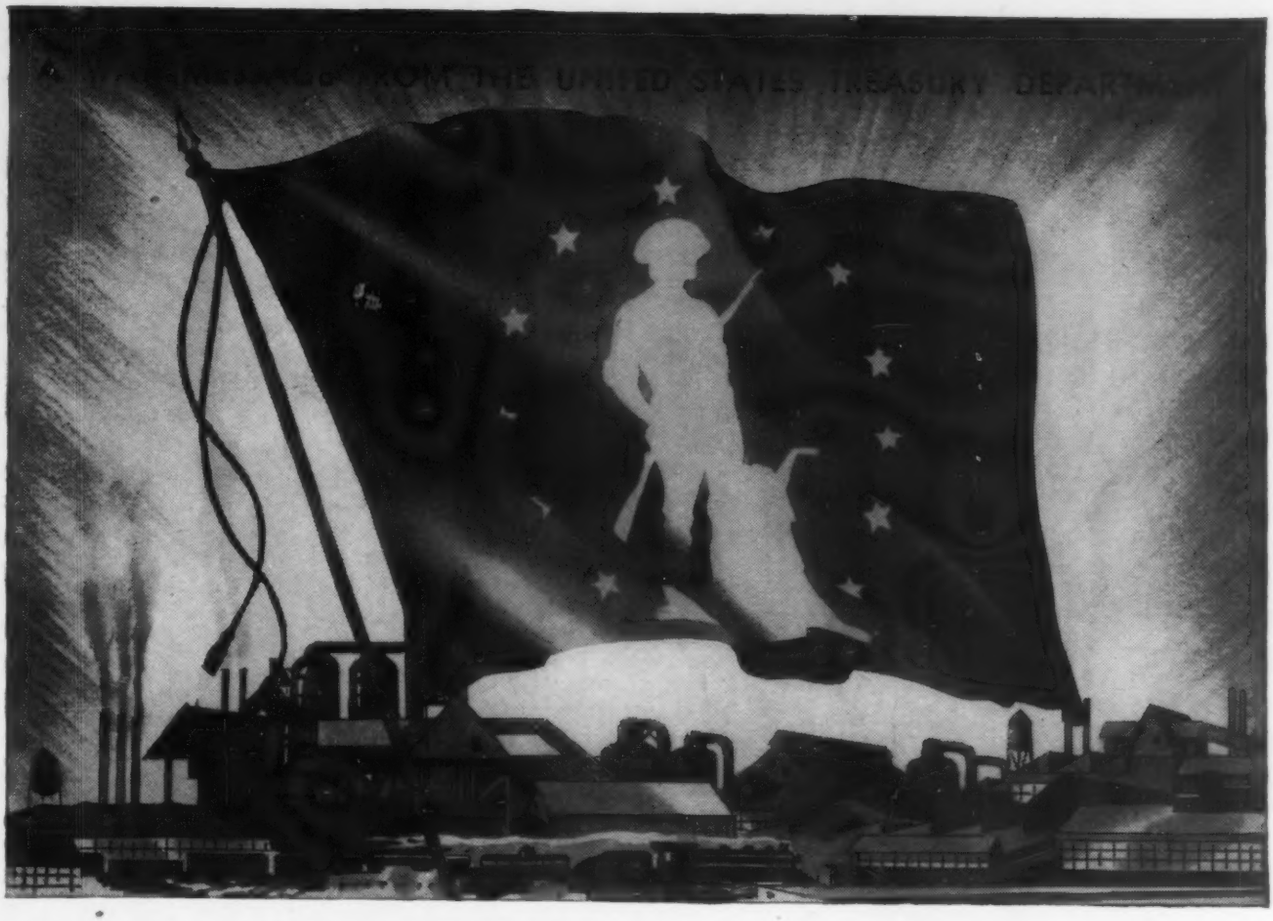

Next to the Stars and Stripes . . .

AS PROUD A FLAG AS INDUSTRY CAN FLY

Signifying 90 Percent or More Employee Participation in the Pay-Roll Savings Plan

IT doesn't go into the smoke of battle, but wherever you see this flag you know that it spells Victory for our boys on the fighting fronts. To everyone, it means that the firm which flies it has attained 90 percent or more employee participation in the Pay-Roll Savings Plan . . . that their employees are turning a part of their earnings into tanks and planes and guns *regularly,* every pay day, through the systematic purchase of U. S. War Bonds.

You don't need to be engaged in war production activity to fly this flag. Any patriotic firm can qualify and make a vital contribution to Victory by making the Pay-Roll Savings Plan available to its employees, and by securing 90 percent or more employee participation. Then notify your State Defense Savings Staff Administrator that you have reached the goal. He will tell you how you may obtain your flag.

If your firm has already installed the Pay-Roll Savings Plan, now is the time to increase your efforts: (1) To secure wider participation and reach the 90-percent goal; (2) to encourage employees to increase their allotments until 10 percent or more of your gross pay roll is subscribed for Bonds. "Token" allotments will not win this war any more than "token" resistance will keep our enemies from our shores, our homes. If your firm has yet to install the Plan, remember, TIME IS SHORT.

Write or wire for full facts and literature on installing your Pay-Roll Savings Plan now. Address Treasury Department, Section D, 709 12th St., NW., Washington, D. C.

Make Every Pay Day "Bond Day"

U. S. WAR Bonds ★ Stamps

This Space is a Contribution to Victory by ELECTRONICS

U. S. GOVERNMENT PRINTING OFFICE 16—27879-1 Form No. DSS-BP-4

CANNON PLUGS

FOLLOW THE FLAG

Coaxial antenna connector, providing continuous shielding with constant impedence. Inspection door, now open, snaps into place after wire is soldered.

—on land—in the air—at sea

Wherever electrical circuits are used and it is necessary to make or break circuits frequently for installation, inspection or servicing—there you will find a Cannon Connector especially designed for the job.

Every Cannon Plug is built with precision for quick installation or assembly and to give absolutely continuous contact under extreme conditions.

You'll find Cannon Plugs in all American fighting and transport planes, on the sound stages of motion picture studios, in radio stations, in the Army's new tanks, in geophysical research, on ships at sea and any other places where electrical connections have to be made quickly and with absolute security.

Type K

Type AN

Type AP

Here are three of several types of Cannon Plugs used in the electronics field.

CANNON

CANNON ELECTRIC

DEVELOPMENT COMPANY

LOS ANGELES • CALIFORNIA

tive with respect to the cathode to cut off anode current and the target fluoresces all around. When the contacts touch, the grid of the tube is made positive with respect to the anode and target, anode current flows and a shadow appears on the target.—Mills, *Review of Scientific Instruments*, February, 1941, p. 105.

Casting Tester

CERTAIN METAL CASTINGS may be tested for cracks or other imperfections by striking them with a hammer and comparing the "ring" with that of a similar casting known to be perfect. The value of such a test depends to a large extent upon identical suspension or mounting of sample and standard castings, striking of both with the same force at the same relative point and the accuracy with which differences in sound pitch can be distinguished.

Suspension of samples and test castings may be made uniform by any one of a number of mechanical means which need not be mentioned here. Uniformity of striking point and power may be solved by using rigidly positioned and mechanically or electrically driven hammers. Sound output at a given standard pitch may be measured by feeding the "ring' into a microphone mounted a fixed distance from the hammer, amplifying the microphone output by an a-c amplifier equipped with a band-pass filter designed to accept the standard frequency only and, finally, operating an output meter giving a visual peak reading. Electronic Control Corp., ELECTRONICS—February, 1939, p. 25.

Vibration Burglar Alarm

THE VIBRATION ACCOMPANYING an attempt to cut or break through a property boundary fence, or vibration induced in a fence from the ground by attempts to tunnel beneath or jump over a fence, or vibration of a fence by sound waves produced in the vicinity of the fence, can be transmitted along the rails or other inter-connecting members of the fence for a considerable distance. Such vibration may be used to actuate an electronic alarm circuit, a vibration unit converting me-

ON
OFF
Type C-6363 Switch Circuit Breaker
Type C4351 Series, Used for Tube Warming Tube Cooling, and High Limit Controls
Type PM NAF-1131 Circuit Breaker
KLIXON
Disc Operated
THERMOSTATS
Type B3120 Crystal Dew Point Control
Type C2851 Series, Used as Roughing Controls on Outer Crystal Ovens
Type ER Series Ambient Compensated Time Delay Relays
Type RT Adjustable Crystal Temp. Oven Control

for Positive, Snap-Acting Control

Klixon Controls have a wide range of applications. They are used for motor and transformer overheat protection, electrical circuit overload protection, temperature control, as well as many uses in radio equipment. And the big performance advantages that you get with these controls are due to the snap-acting Spencer Disc, which is the heart of Klixon Controls. This disc not only insures more accurate, positive action but also eliminates many of the troubles common to more complicated and more fussy controls.

Because of the scientifically calibrated Spencer Disc, Klixon Controls are unaffected by motion, altitude, or position of mounting and they are highly immune to shock and vibration. Moreover, Klixon Controls are small and compact, simple, yet rugged in construction, light in weight, low cost, and capable of handling heavy duty electrical loads with ease.

It is very probable that many of the standard types of Klixon Controls are suitable for your requirements. If not, Spencer Thermostat Company's engineering department will gladly co-operate with you on your problems and in the development of special disc-operated controls for your needs.

KLIXON
TRADE MARK REG. U.S. PAT. OFF.

Spencer Thermostat Co.

1406 FOREST STREET • ATTLEBORO, MASSACHUSETTS

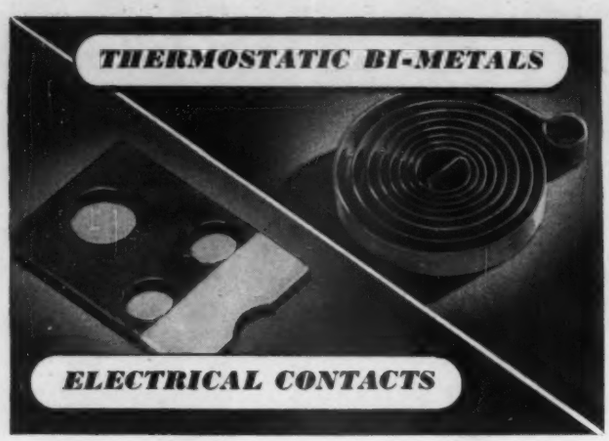

Fans or Flying Fortresses

★ The H. A. Wilson Company is playing a vital role in today's war production—just as it has for over 27 years in peace-time industry. Meeting the most exacting war requirements, Wilco offers a wide variety of specialized thermostatic bi-metals of the high and low temperature types. Also a series of resistance bi-metals, (from 24 to 440 ohms, per sq. mil, ft.). Wilco electrical contact alloys are available in Silver, Platinum, Gold, Tungsten, Special Alloys, Metal Powder Groups. Wilco Aeralloy is the outstanding aircraft magneto contact alloy. Wilco engineers welcome your problem.

WILCO
The H. A. WILSON CO.
105 CHESTNUT ST., NEWARK, N. J.
Branches: Chicago and Detroit

chanical energy into electrical energy.

To operate such a unit there must be a variation in the relative position of the actuating needle or driving lever and its crystal or coil. One element must move while the other element remains motionless, or one element must move more than the other. The latter principle permits the entire unit to be connected to the fence alone, rather than to the fence and a more rigid support, as one element may be driven by direct connection to the case of the device contacting the fence while the other is damped in some manner. One method of accomplishing this is to weight one element and suspend it from a spring, using the inertia of the weighted spring to provide damping.

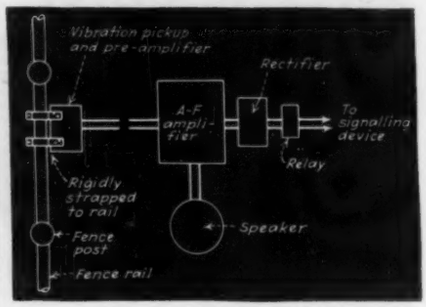

Vibration unit connected to transmit an alarm when a property boundary fence is disturbed

The output of the unit is used to drive an audio-frequency amplifier. The a-f output of the amplifier is rectified and the resultant d.c. operates a sensitive relay which controls any desired variety of signal, such as a light, bell, or horn. Connection of a loudspeaker to the output of the a-f amplifier will permit sounds transmitted to be heard. Depending upon the character of the fence and the character of the unit, it may be possible to identify sounds and to understand speech originating in the vicinity of the unit.

Acoustically Actuated Alarms

ACOUSTICALLY OPERATED alarm devices today commonly installed in vaults are generally designed to turn in an alarm when physical attack upon walls, floor or ceiling occurs rather than to give an alarm on rela-

COMPENSATE FOR HEAT EFFECTS ON METAL CONDUCTORS

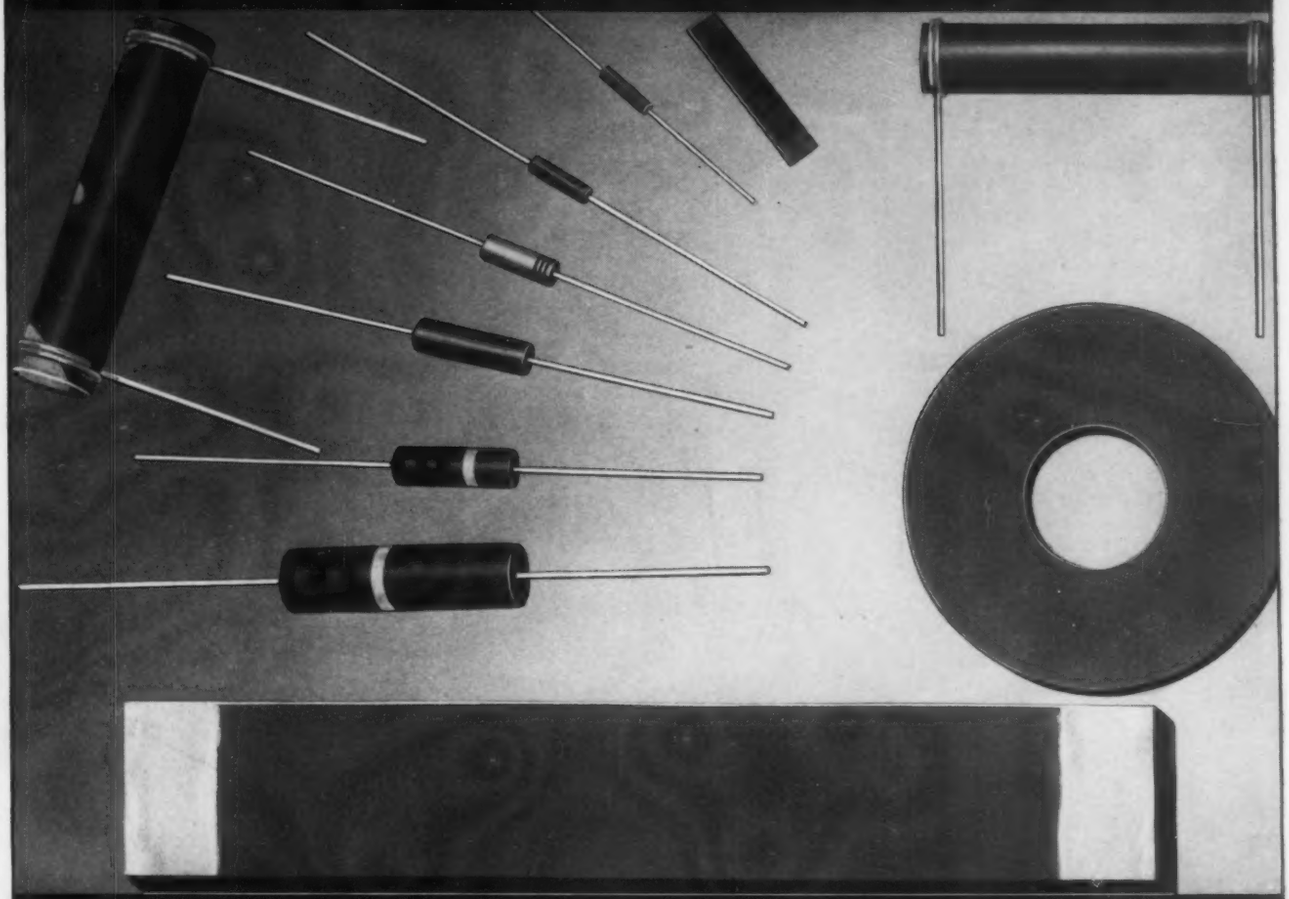

SPEER NEGATIVE TEMPERATURE-COEFFICIENT RESISTORS

Negative change in resistance obtainable from 10 ohms to 10 megohms — with degree of change varied to meet customer's requirements.

A typical application is a SPEER Negative Temperature-Coefficient Resistor connected in series with a coil in such a manner that the resultant ampere turns remain constant. Resistors for such service generally range from 20 to 500 ohms, change approximately 0.2% per degree C. change of temperature, and range from 1 to 12 watts. For heavy wattages, these resistors can be furnished in flat discs or other shapes to fit housings.

2572

SPEER NT-C Resistors, available in any size illustrated, insulated or non-insulated, are particularly useful in voltage regulator and time delay equipment applications.

SPEER RESISTOR CORPORATION
ST. MARYS, PA.

Also New

SPEER 2-WATT INSULATED RESISTOR

Characterized by unique advantages due to molding shell and core in one operation. Result:

- **Uniform shell around core**
- **Uniform diameter of core**
- **More efficient heat transfer**

Catalog E mailed promptly on request

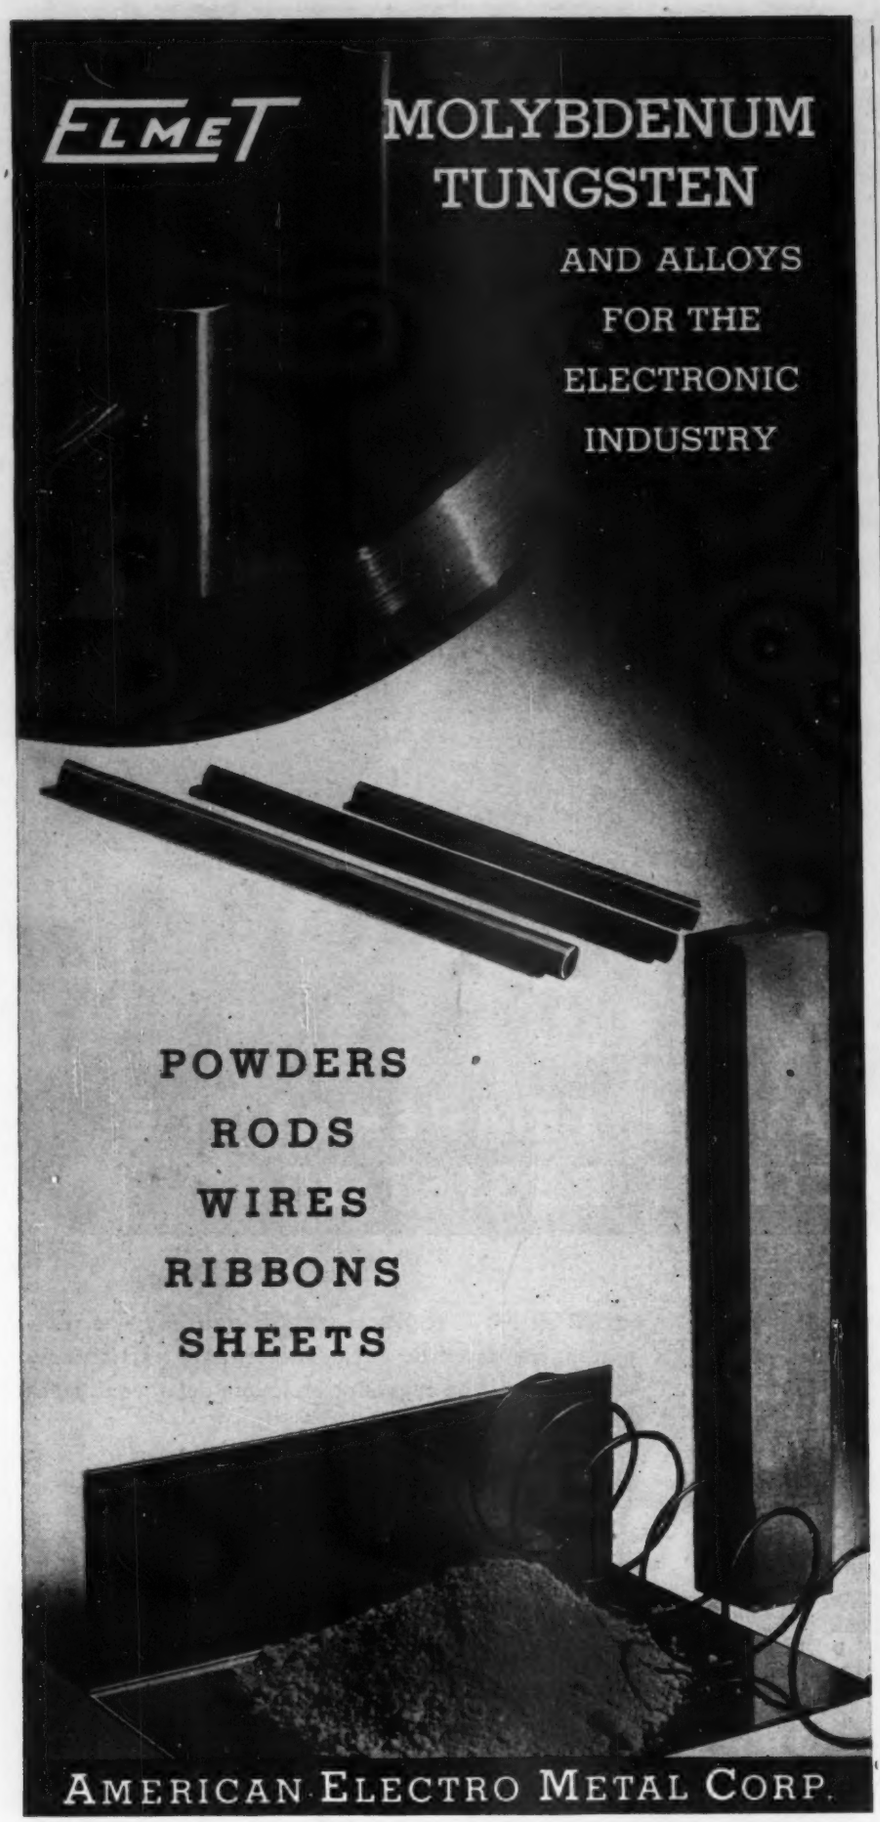

Office: 165 BROADWAY NEW YORK, N. Y. Factory: LEWISTON MAINE

tively low-level sounds produced by intruders moving around within vaults. Pickup devices range from sound-pressure actuated non-electronic "switches" to crystal and other type microphones having inherently low noise levels. Where microphones are used their output is amplified and then rectified and the resultant d.c. actuates a signal relay.

Sensitivity required of vault alarms depends upon whether or not vaults are reverberant or non-reverberant, a non-reverberant vault being normally defined as one in which the average coefficient of sound absorption of exposed interior surfaces exceeds 0.5, or is variable because of merchandise in storage. In reverberant vaults it is customary to adjust alarms to transmit a signal at sound levels of the order of 80 to 90 db for a sound of impact origin. In non-reverberant vaults the alarm systems should transmit a signal at a sound level 15 db above the normal ambient. Required amplifier frequency response varies with the type of vault and its contents, most frequently encountered conditions requiring a range readily obtainable through conventional a-f amplifier design.—MacDonald, ELECTRONICS, February, 1942, p. 38.

Engine Cylinder Pressure Indicators

MECHANICAL INDICATORS were used for many years to study the pressure variations inside the cylinders of internal combustion engines. Electronic indicators having less moving-part inertia are now generally used, the usual method of measurement involving conversion of pressure variations into electrical variations and the reading of the electrical variations on the screen of a cathode-ray oscilloscope.

One method of conversion involves the insertion of a small, flexible and highly polished metal diaphragm in the wall of the cylinder under test. A light beam is directed at the diaphragm and is reflected to a phototube. As cylinder pressure variations flex the diaphragm, light reflected from it diverges and a lesser amount, proportional to cylinder pressure, reaches the phototube. Phototube output is thus proportional to cylinder pressure.

Other energy conversion devices

DEATH *before* DISHONOR!

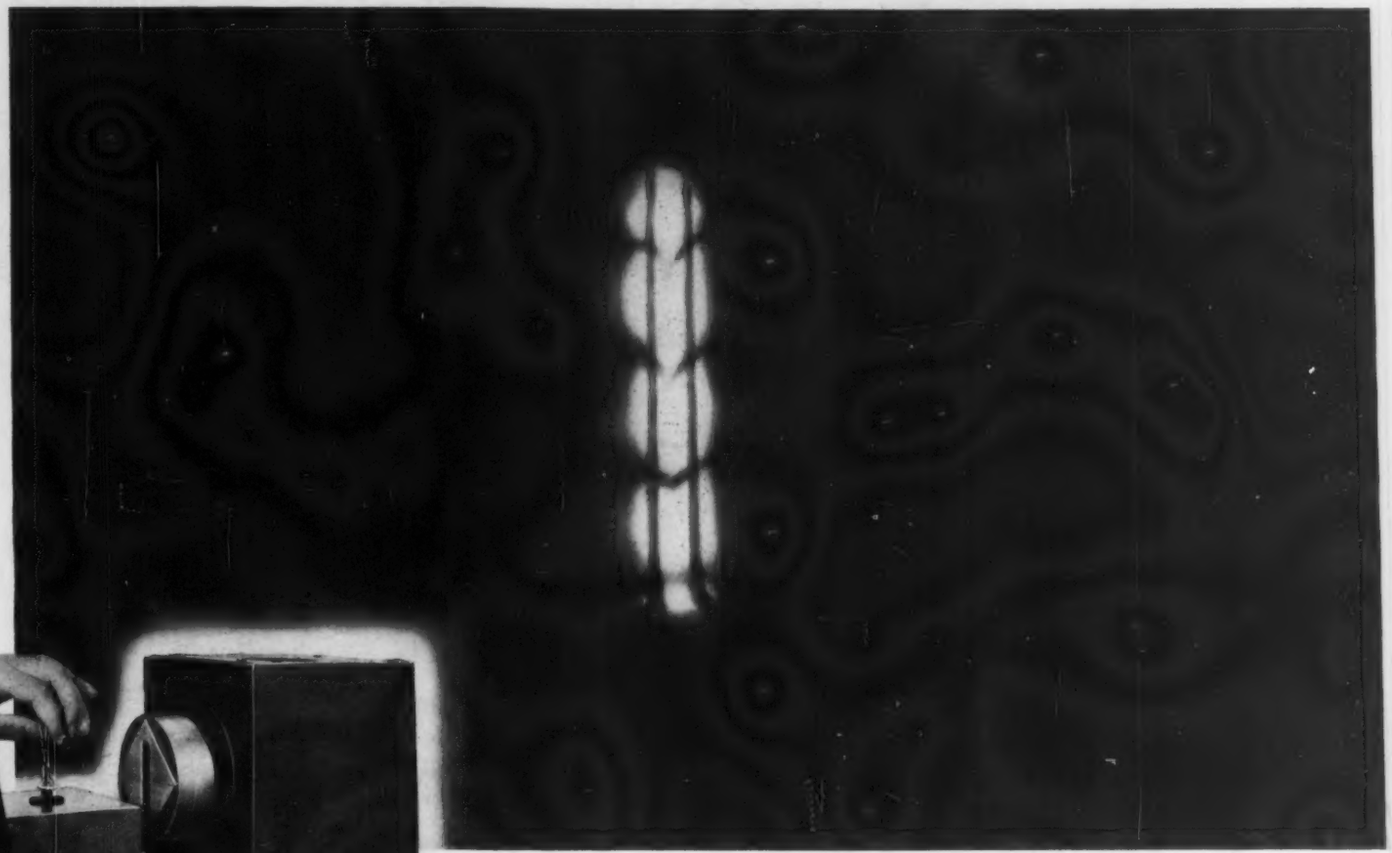

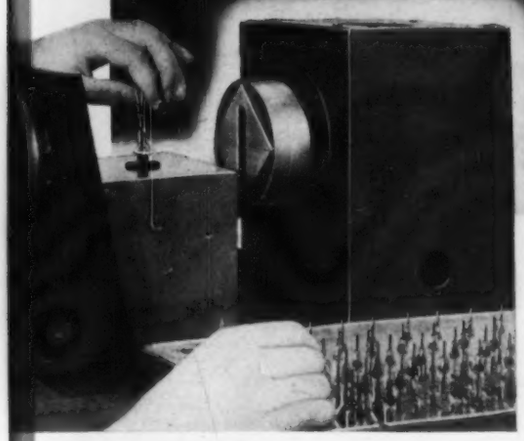

Observation of the stress points on glass bead seals around vacuum tube leads is made with this device. Close-up photo above shows the actual view of a faulty lead. Note the change in polarized light creating distorted shadows which show up stress and strain in beads. Such strain sometimes occurs where metal and glass are sealed together.

Casual observation of a vacuum tube does not reveal its flaws. That's why Eimac engineers have developed many devices for the purpose of exposing even slight weaknesses in construction. The above is not a dungeon window, but a close-up photo of a faulty bead on a filament stem as viewed through a special bead testing device. Needless to say, this stem will never reach final assembly . . . better "death before dishonor" to the Eimac tradition of dependability.

Such care in production plus constant research into the phenomenon of the electron tube assures you of the utmost in performance from every Eimac tube . . . provides the answer to why Eimac tubes are first choice by most of the leading engineers throughout the world.

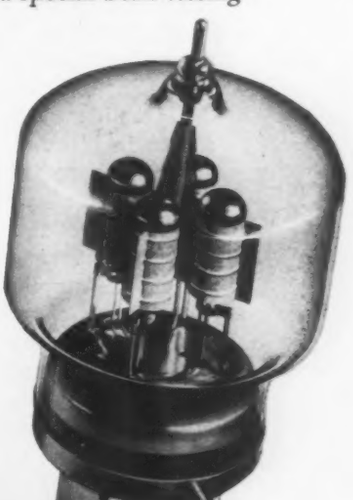

Export Agents:
FRAZAR & CO., LTD., 301 Clay St.
San Francisco, California, U. S. A.

Inspecting the entire glass bulb with the help of a polarized light. This device shows up stress and strain on the glass which might be created during the shaping operations.

Follow the leaders to

Eimac TUBES

Mfg. by Eitel-McCullough, Inc., San Bruno, California, U. S. A.

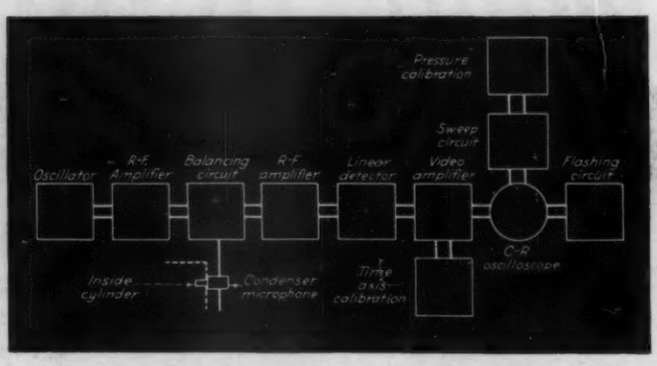

Block diagram of the apparatus necessary for the measurement of cylinder pressures by the use of a condenser microphone and a cathode-ray oscilloscope

used to transform pressure into electrical impulses include carbon stacks (variable resistance), quartz crystals (piezoelectric effect), moving coils or variable reluctance (electromagnetic conversion) and condenser microphones (variable capacity). Numerous refinements have been made in connection with such systems of measurement. For example, measurement of engine pressure variations by means of a condenser microphone polarized with high d-c potential and driving a high-gain d-c amplifier has several disadvantages. Inasmuch as a condenser microphone used in this manner operates as a high impedance device the microphone circuit has a tendency to pick up and indicate undesired voltages induced from nearby ignition systems. Variation in microphone-cable-to-ground capacity due to vibration affects measurements since the high impedance cable capacity is essentially in parallel with the capacity of the microphone. Instability is frequently serious due to changes in microphone insulation and changes in the input resistance of the initial d-c amplifier tube. In the circuit shown in block form the difficulties outlined above are resolved by energizing the microphone with high frequency voltage of the order of several Mc, employing it to modulate an r-f amplifier rather than to operate a d-c amplifier. A linear detector removes the r-f component of the modulated signal and delivers voltages comparable to the output of the microphone to the video amplifier of the associated cathode-ray oscilloscope.—Robertson, *Review of Scientific Instruments*, June, 1940, p. 142; Penther and Pompeo, ELECTRONICS, May, 1941, p. 43.

Temperature Control

ONE JUNCTION OF A thermocouple is placed within the chamber whose temperature is to be controlled and the other junction at some reference point. A milliammeter is connected in series with the thermocouple and a calibrating resistance. As the temperature within the chamber increases, the thermocouple current passes through the meter and deflects its pointer. A small and light metallic vane mounted on the pointer passes between two coils mounted close to the plane of pointer travel. The pointer may be free to move along the pointer path for operation at various temperature levels. The two coils, L_1 and L_2, are part of the grid and plate circuits, respectively, of a vacuum tube oscillator. In normal operation, when the vane is not between the two coils and the temperature is below the desired value, the circuit is not oscillating because of the degenerative action of L_2 on L_1 and the plate current has an average value of about 10 ma. This is sufficient to energize the relay M_1 which controls the operation of the fuel injection apparatus or the damper system of the furnace thereby permitting the continued application of heat to the chamber.

When the temperature rises to the desired value, the vane passes between the two coils and acts as a shield to isolate them from each other electromagnetically and prevent the degenerative action of coil L_2, thereby allowing the circuit to oscillate. When the circuit oscillates the control grid draws current and a voltage drop appears across the grid leak resistor R_1 and condenser C_1. This drives the grid to a more negative potential and reduces the plate current to an average value of about 5 ma. The drop-out current of the relay M_1 is somewhat greater than 5 ma and it therefore opens the circuit to the fuel injection apparatus and cuts off the supply of heat. —McLaren, ELECTRONICS, November, 1941, p. 50.

Circuit diagram of the thermocouple and meter movement temperature controller. Although a type 25L6 tube is used here, other similar tubes may be used. Note that a-c power is used

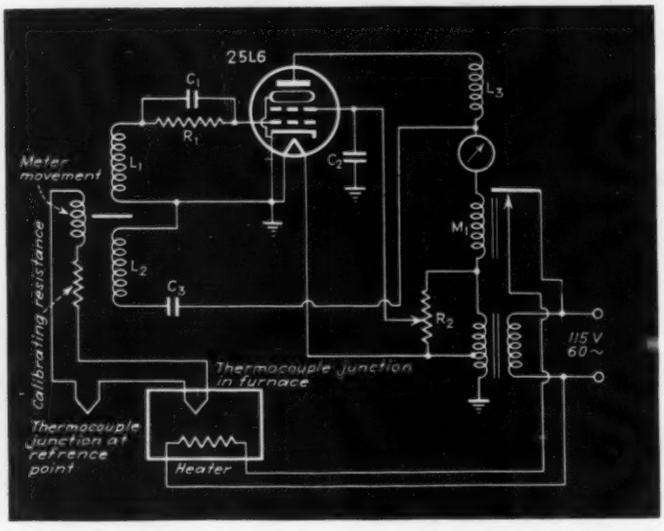

Mechanical Conveyor Synchronizer

WHERE A CONVEYOR belt travels over independently driven wheels or sprockets the straightening or sag in the belt which occurs between units when motors get out of step may be used as a source of power to force them back into synchronization.

A roller rides the conveyor belt between driving units and is mechanically linked to the movable core of a reactor. Up or down movement of the roller varies the inductance of the reactor and this variation in inductance controls the firing of thy-

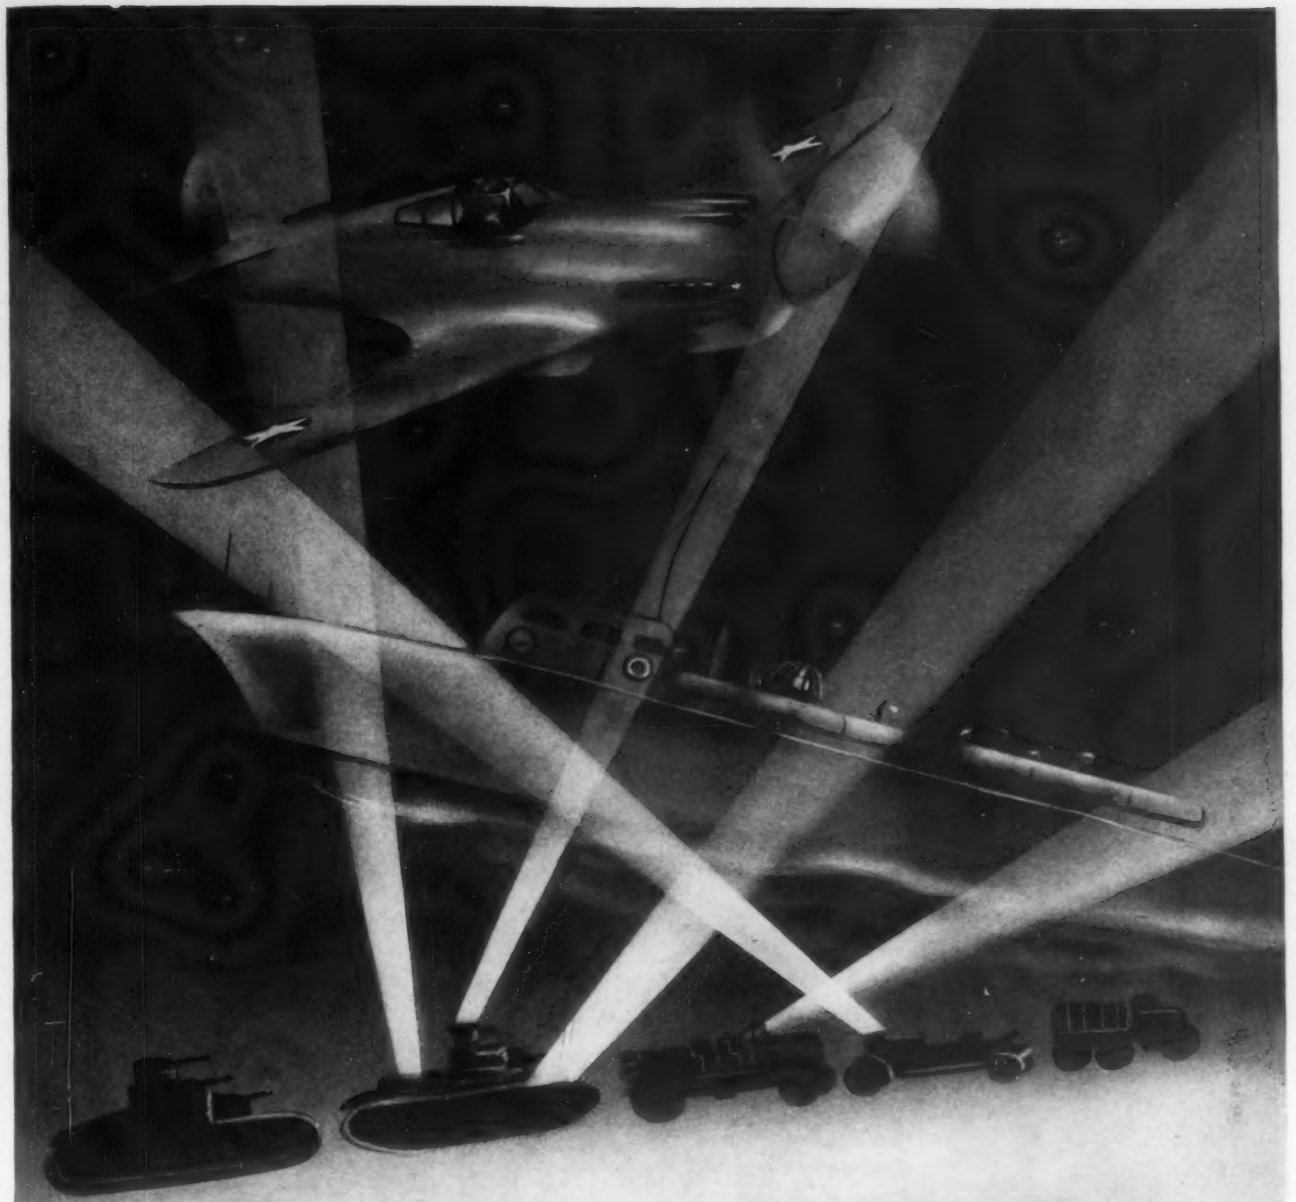

Jefferson-Travis *Dependable* Two-Way Radio Communication Equipment is

SERVING ON ALL FRONTS

In ever increasing quantities our radio communication equipment is being furnished to the Army and Navy as well as the military forces of the United Nations. Our products are "in action" on all fronts throughout the world—in the *AIR*, on the seven *SEAS*, and with the mechanized and mobile *LAND* forces everywhere, including the valiant *HOME* defense units both here and abroad.

Jefferson-Travis has gone "all out" for speedy Victory!

JEFFERSON-TRAVIS RADIO MFG. CORP.

NEW YORK, N. Y.

Manufacturers of Aircraft, Marine and Mobile Radio Communication Equipment

DU MONT

the Cathode-Ray Pioneer

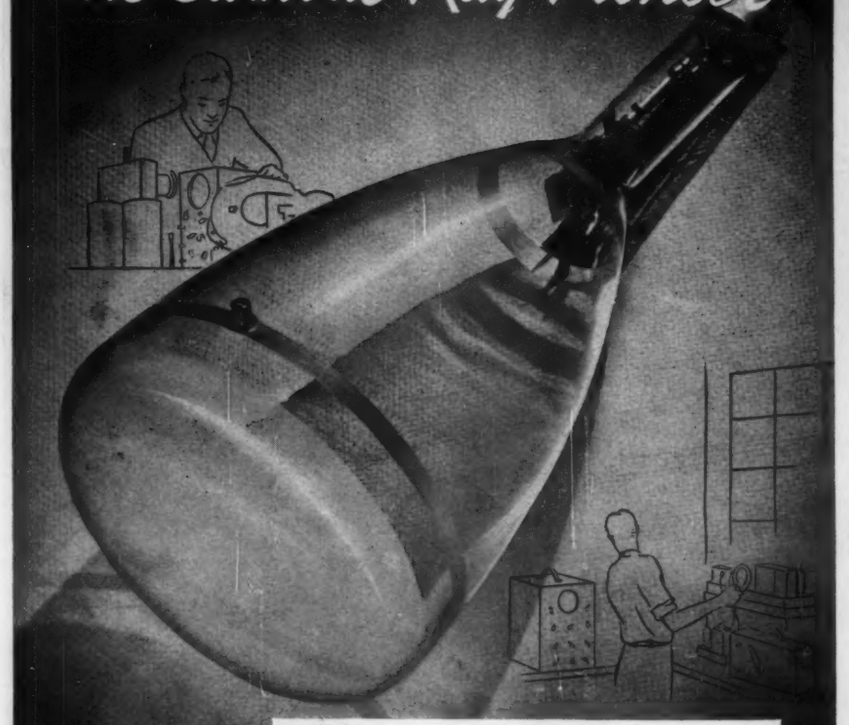

A decade ago Allen B. DuMont had an idea — and a fond hope: to make the cathode-ray tube an everyday, commercial, mass-produced device at a within-reach price.

Today that idea and hope are fully realized. Rugged DuMont cathode-ray tubes are used under the most gruelling conditions in plants, out in the field, in laboratories, by technicians and workmen alike.

And DuMont pioneering continues. Constant refinements in design and construction; improved production methods; a steadily growing fund of application experience — these are all yours when you specify DuMont cathode-ray tubes and Dumont oscillographs. Write for data.

DUMONT

ALLEN B. DU MONT LABORATORIES, Inc.

Passaic · New Jersey

Cable Address: Wespexlin, New York

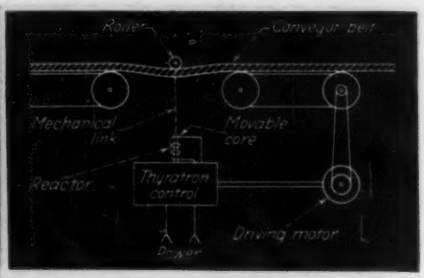

Conveyor synchronizer using thyratron control, shown in elemental form

ratron tubes by the phase-shift method. The belt-driving motor is connected to the power line through the thyratrons in such a manner that when the belt sags the motor speeds up while straightening of the belt causes the motor to slow down.

Many variations and refinements of this synchronizing scheme are possible.—Henney, ELECTRON TUBES IN INDUSTRY.

Nail Detector

THE PRESENCE OF NAILS in lumber moving through a machine at the rate of 100 feet per minute produces an alarm or, if desired, causes the lumber to be marked at the location of the nails.

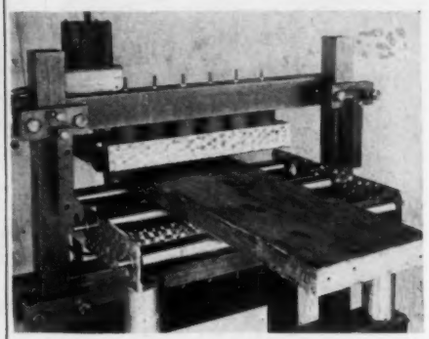

Nail detector. If lumber passing through the jaws contain nails an alarm is operated or the board is marked at the location of the nails

Lumber to be examined passes through an air gap in a magnetic circuit. Passage of iron through the gap changes the reluctance and, consequently, the flux of the magnetic circuit. Changing flux induces a voltage in a pickup coil and this voltage is amplified sufficiently to operate an alarm or actuate a solenoid type hammer which punches a mark on the lumber.—Andrews and Perillo, ELECTRONICS, January, 1942, p. 72.

POWERSTAT

VARIABLE TRANSFORMERS

And Seco Automatic Voltage Regulators

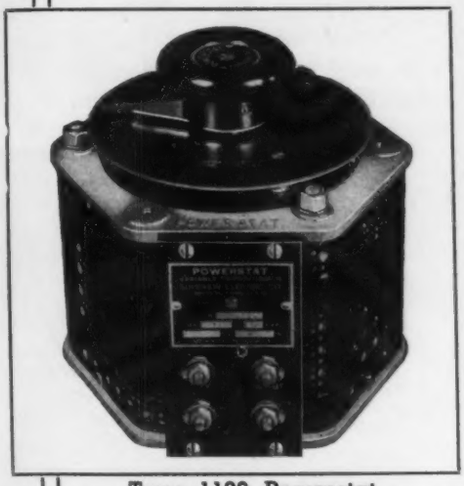

Type 1126 Powerstat

Type 1256 Powerstat

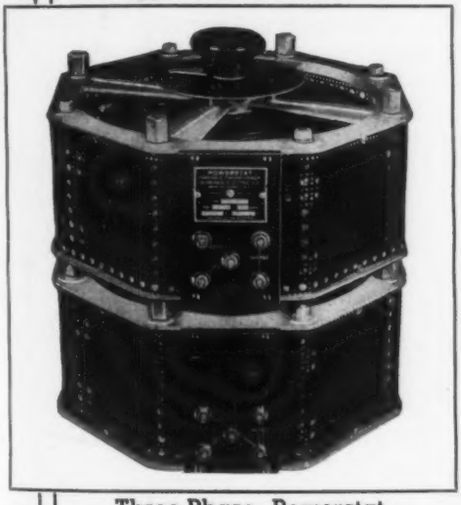

Three-Phase Powerstat

Powerstat — the Variable transformer that accurately controls power for all electronic and radio purposes solves such power problems as Tube Filament Voltage Control, Transmitter Bias Power Supply Voltage Control, and Transmitter Plate Supply Control.

Type 1126 Powerstat

Input: 115 volts 50/60 cycles
Output: 2.0 KVA
Max. Rated Output Current: 15 amp. available over entire range of output voltages
Output Voltage Range: 0 to 135 volts
No-load Power Loss: 16 watts
Over-all Dimensions: 8 x 8 x 7⅝ inches
Net weight: 20 lbs.

◆

Type 1256 Powerstat

Input: 230/115 volts 50/60 cycles
Output: 7.5 KVA on 230 volt line
Max. Rated Output Current: 28 amp. available over entire range of output voltages
Output Voltage Range: 0 to 270 volts
No-load Power Loss: 40 watts
Over-all Dimensions: 14¾ x 14¾ x 8 inches
Net Weight: 66 lbs.

◆

Typical Three-Phase Powerstat Type 1256-2

Input: 230/115 volts 3 phase 50/60 cycles
Output: 13.1 KVA on 230 volt line
Max. Rated Output Current: 28 amp. available over entire range of output voltages
Output Voltage Range: 0 to 270 volts
Connection: See figure 7 of Bulletin 149

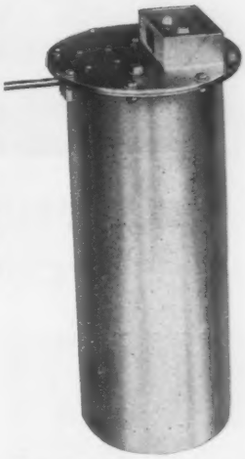

Oil Mounted Powerstat in Stainless Steel Tank

Seco Automatic Voltage Regulator

is used for radio transmitters and many types of electronic devices requiring reasonably close tolerances of line voltages. Important for radio transmitters located at the ends of long feeder lines where regulation is poor and voltage fluctuation wide (Send for Bulletin 163 LE).

Send for Powerstat Bulletin 149LE

Superior Electric Co.

36 HARRISON ST. **BRISTOL, CONN.**

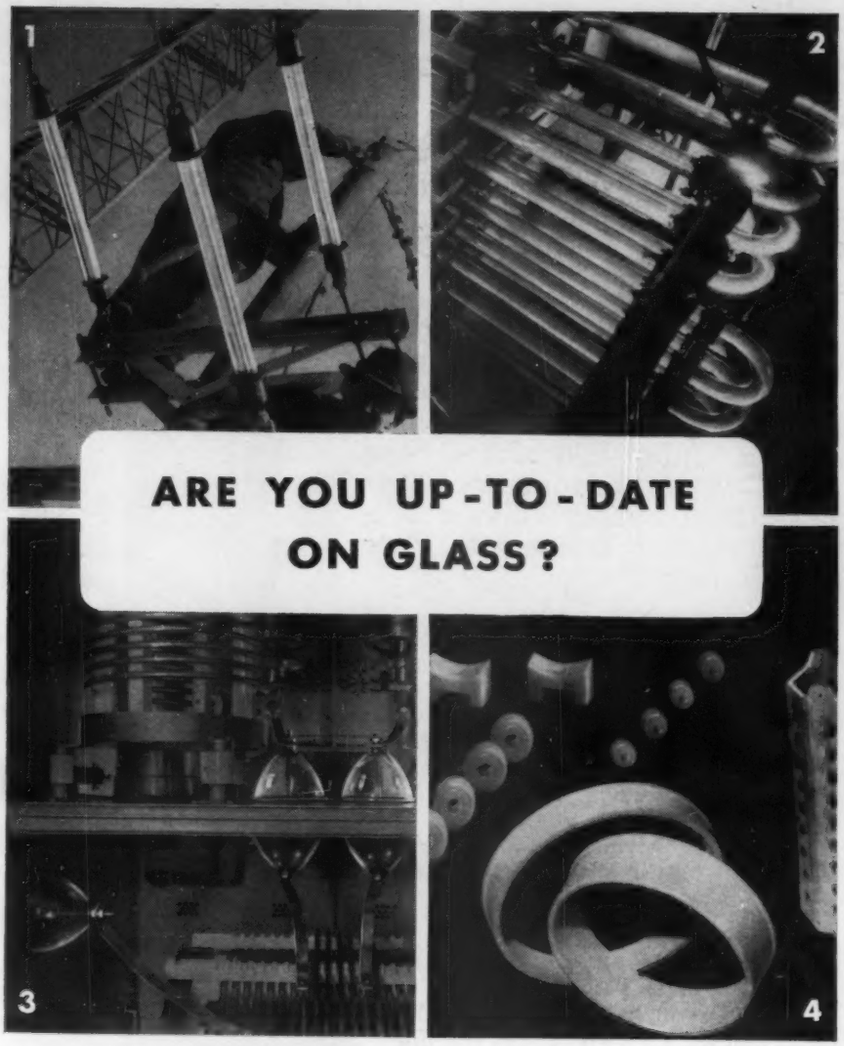

COUNT the outstanding insulating properties of borosilicate glass! High electrical resistance. Low power loss. Low surface conductivity. Great resistance to corrosion. High strength-to-weight ratio. All are good reasons why you'll find Pyrex brand insulators at work wherever superior performance is demanded: i.e. at famous Station KDKA (Fig. 1); at Station WLW (Fig. 2); in the new Westinghouse 50-H.G. broadcast transmitter (Fig. 3).

But that's not all! In addition to standard antenna, strain, entering and stand-off insulators, advanced manufacturing techniques now make it possible to produce insulators of more intricate shape, in wider ranges of size and type, and to more precise dimensions than ever before. For example, coil mounting blocks, insulation bushings, line spacers, coil forms and anode bushing rings (all Fig. 4) are just a few.

If you're worried about a continued material supply, check into glass now! Send your problem to Insulation Division, Corning Glass Works, Corning, N. Y., and write for free booklet "The Dielectric Strength of Glass."

DO YOU KNOW HOW HIGH GLASS RATES AS AN INSULATING MATERIAL?

PROPERTY	BOROSILICATE GLASS	LOW-LOSS STEATITE	PORCELAIN	CELLULOSE ACETATE	PHENOLIC RESINOID
High scratch hardness	6	5	3	1	2–
Low thermal expansion	6	4	5	1	2
High dielectric strength	5	2	1	3	4
Low dielectric constant	6	3	5	4	1
High volume resistivity	5	4	3	2	1
Total point score	28	18	17	11	10

Pyrex Insulators
BRAND

"PYREX" is a registered trade-mark and indicates manufacture by Corning Glass Works.

Vehicle-Operated Traffic Light

TRAFFIC LIGHTS MAY be caused to operate at the approach of a car by the method shown. An induction or detector coil is installed beneath the road surface over which cars approaching the light must pass. Current is induced in the coil by the earth's magnetic field and the sensitive relay connected to the coil is adjusted to remain inoperative when this normal current is present. When

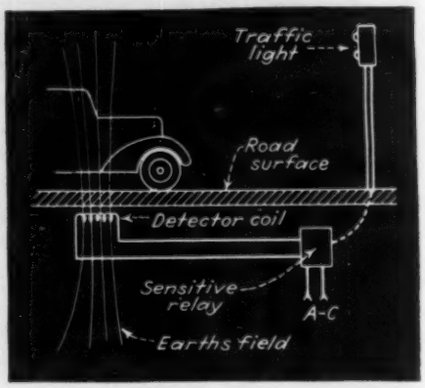

Distortion of the earth's magnetic field by an approaching car may be made to alter current flowing in a coil sufficiently to actuate a relay

a car passes over the road surface beneath which the coil has been installed the earth's magnetic field is distorted sufficiently to alter the amount of current flowing in the coil, tripping the relay and supplying power to the light.—Lamb, ELECTRONICS, December, 1940, p. 35.

Lumber Moisture Content Checker

THE CONVENTIONAL electric method of checking the moisture content of lumber is to use a sensitive ohmmeter, inserting test needles deeply into the wood some standard distance apart and comparing the d-c resistance reading with that of lumber known to be dry. An instrument made by the Moisture Register Company of Los Angeles dispenses with the test needles by utilizing the high-frequency field of a 12 Mc oscillator, as shown in the drawing on page 122.

An electrode forming part of the oscillator circuit is brought into intimate contact with the lumber to be tested. Power absorbed from the oscillator by the lumber causes a

3 HEINEMANN "Re-Cirk-it" Fully Electro-Magnetic CIRCUIT BREAKERS

Single Pole | Two Pole | Three Pole

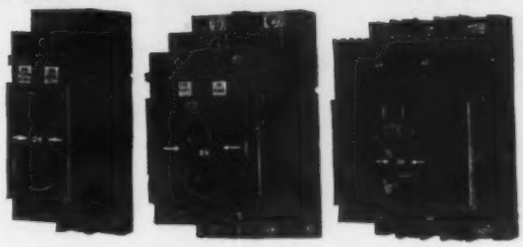

And

Here is what they do!

with CALIBRATING TAP

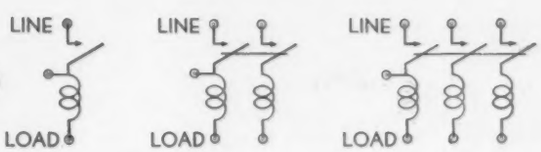

These "Re-Cirk-It" circuit breakers are assembled with an extra terminal attached to the load side of the interrupting mechanism which is the line side of the trip coil. This additional terminal can be used for an extra circuit not to have any effect on the trip coil; or it may be to provide means of connecting a rheostat or resistor in parallel with the trip coil to gain different fixed ratings; or an adjustable variation in the rating giving a much wider range in calibration of the tripping point.

with SHUNT TRIP

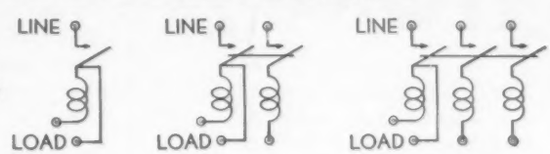

These "Re-Cirk-It" circuit breakers are assembled with the trip coil connected between an extra terminal and the load side of the interrupting means. The circuit connection from the line terminal through the contacts to the load terminal is solid without an overload coil, one end of the coil being connected to the load side of the contacts (interrupting means), the other end of the coil to the extra terminal. The use of this breaker is for remote control tripping so that a circuit of very low capacity at the same voltage may control the opening of the breaker.

with RELAY TRIP

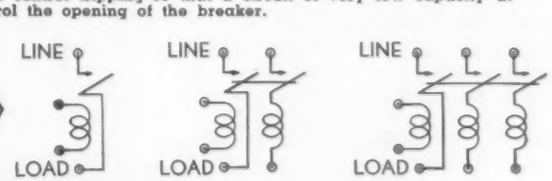

These "Re-Cirk-It" circuit breakers are assembled with the leads of the trip coil attached to separate terminals so that the interrupting mechanism (circuit opening means or contacts) may be in one circuit which is connected to the load and line terminals while the trip coil is connected to separate terminals and may be energized by a separate control circuit or may be used with the interrupting mechanism in the primary of a transformer and the coil in the secondary circuit. The trip coil can be arranged for as low as a few volts and up to several thousand.

Send for Catalog 40 with complete data.

TIME OVERLOAD CURVES

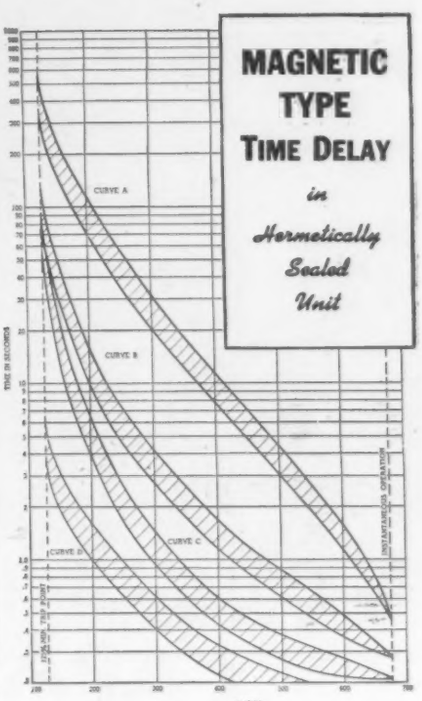

MAGNETIC TYPE TIME DELAY *in Hermetically Sealed Unit*

The time curves shown illustrate the wide range of adaptability of these breakers to various conditions. In other words, they can be assembled to meet specific requirements as to the time delay feature, since they are not dependent upon movement of thermostatic metal nor the heating of soft metal.

Curve "A" illustrates the standard time delay curve to which a standard time delay breaker will adhere. However, if so ordered, they may be had with other time curves. Curve "D," for instance, is the time curve of a breaker that would protect a load derived from gas filled lamps, and other circuits with similar characteristics, where the current returns to normal after about one cycle.

Curves "D" and "C" are also the ideal protection for small transformers since the breaker takes care of the relatively fast and high inrush of current during the first cycle when connected to the line.

If no time delay is desired, breakers can be had in instantaneous trip types. They will trip as soon as current rises to breaker rating.

HEINEMANN CIRCUIT BREAKER CO.,

SUBSIDIARY OF HEINMANN ELECTRIC CO.

97 PLUM ST. — Est. 1888 — TRENTON, N. J.

50,000 Volts
FOR INTERMITTENT SERVICE
-- surge generators, etc. --

To 30,000 Volts
FOR CONTINUOUS SERVICE
-- rectifier filters, etc. --

HIGH-VOLTAGE CAPACITORS

Type 6020 — 6000 v. D.C.W. 2.0 mfd. to 10.0 mfd.
Type 7520 — 7500 v. D.C.W. 0.5 mfd. to 6.0 mfd.
Type 10020—10,000 v. D.C.W. 1.0 mfd. to 5.0 mfd.
Type 12520 — 12,500 v. D.C.W. 0.5 mfd. to 5.0 mfd.
Type 15020 — 15,000 v. D.C.W. 0.25 mfd. to 3.0 mfd.
Type 20020 — 20,000 v. D.C.W. 0.25 mfd. to 4.0 mfd.
Type 25020 — 25,000 v. D.C.W. 0.2 mfd. to 1.0 mfd.
Type 37520 — 37,500 v. D.C.W. 0.1 mfd. to 1.0 mfd.
Type 50020 — 50,000 v. D.C.W. 0.1 mfd. to 0.5 mfd.
Also 25,000 v. Output (12,500—12,500 v.) for Voltage-Doubling.

● To meet recent radio and electronic developments, Aerovox engineers have evolved these Hyvol Type '20 oil-filled capacitors in ratings from 6000 to 50,000 volts D.C.W.

Likewise production means to make them. Giant Aerovox-designed and built winding machines handle up to several dozen "papers". Batteries of giant tanks permit long pumping cycles for thorough vacuum treatment followed by oil impregnation and filling. Multi-laminated kraft tissue and hi-purity foil sections are uniformly and accurately wound, compressed, impregnated, encased.

Hermetically-sealed sturdy welded-steel containers. Rust-proof lacquer finish. Cork-gasketed pressure-sealed glazed porcelain high-tension pillar terminals. Truly capacitor dreadnoughts.

Submit that Problem . . .

Whether it be for giant high-voltage capacitors or low-voltage by-pass electrolytics, regardless, send it along for our engineering collaboration, recommendations, quotations. Engineering data on request.

NEW BEDFORD, MASS., U. S. A.
Sales Offices in All Principal Cities

AEROVOX CORPORATION

In Canada
AEROVOX CANADA LTD.
Hamilton, Ont.
EXPORT: 100 Varick St., N. Y.
Cable "ARLAB"

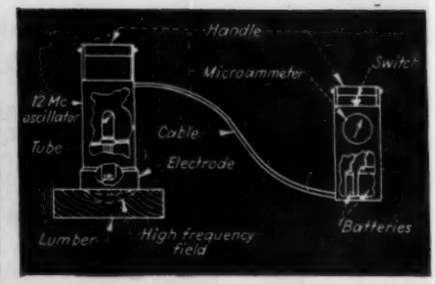

Lumber moisture checker. A high-frequency field is substituted for the conventional test needles and d-c ohmmeter

change in the anode current of the oscillator and this change is indirectly measured by means of a microammeter installed in a second unit along with operating batteries for convenience in handling. A chart furnished with the instrument tells what the microammeter reading should be when woods of various varieties are normally dry. Other microammeter readings indicate relative moisture content. Directly calibrated microammeter dials are available for certain frequently handled woods.

Gas Sampling Circuit

CERTAIN NOXIOUS gases such as carbon monoxide have appreciable electrical conductivity even when present in minute quantities. The presence of such gases in air is commonly detected by means of the Wheatstone bridge circuit.

Air known to be free of the noxious gas is mixed with liquid of known resistance in a sampling chamber. The sampling chamber is connected to serve as one leg of the bridge and the bridge is balanced. No current flows to the sensitive relay. Air suspected of containing noxious and conductive gas is then

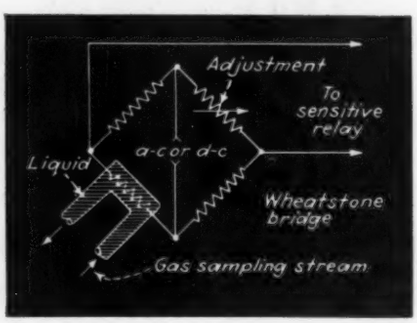

Wheatstone bridge method of sampling noxious gasses dissolved in liquid and used as one arm of the bridge

PRESENTING

A line of Audio and Power Components of broadcast quality designed to meet the individual manufacturer's specifications.

CASE AND MOUNTING DIMENSIONS

CASE NUMBER	APPLICATIONS				
	AMPLIFIER UNITS	POWER UNITS		Filter Reactors	MISCELLANEOUS
20	Input, Interstage, and Output Transformers (Low Level)	2 V.A. 60cps 4 V.A. 400cps		Lf=.0015	High Q Inductors For Filter And Tuned Circuits. Q=10 to 18
30	Dual Units Same As Above	Contains two transformers each rated same as shown above.			
40	Audio Transformers of Medium Rating	4 V.A. 60cps 8 V.A. 400cps		Lf=.02	
50	Output Transformers Up to 10 Watts	5 V.A. 60cps 15 V.A. 400cps		Lf=.03	
70	Output Transformers Of Slightly Lower Rating Than V.A. Rating of Power Transformers (Assuming No Unbalanced D.C. In Primary or Secondary)	10 V.A. 60cps 20 V.A. 400cps		Lf=.05	High Q Inductors For Q=20 to 35
90		30 V.A. 60cps 50 V.A. 400cps		Lf=.20	Audio Filters (One, Two, or Three Sec.)
110		45 V.A. 60cps 65 V.A. 400cps		Lf=.40	
140		85 V.A. 60cps 125 V.A. 400cps		Lf=.80	
160	Other Audio Transformers For Higher Level Operation	110 V.A. 60cps 150 V.A. 400cps		Lf=1.0	High Voltage Plate And Filament Transformers
180		250 V.A. 60cps 500 V.A. 400cps		Lf=3.0	

APPROXIMATE RATINGS FOR STANDARD CASES

1. Data assumes low voltage units (500 volts or less) with average number of terminals.
2. The use of a case in any given application should be verified with the N. Y. Transformer Co. before making a final design.

CASE NUMBER	CASE DIMENSIONS			MOUNTING DIMENSIONS		SIZE OF HOLES**
	A	B	C	D	E	
20	1.313	1.313	1.625	.9375*	.9375*	4-40
30	1.313	1.313	2.875	.9375*	.9375*	4-40
40	2.063	1.938	2.313	1.375	1.250	8-32
50	2.438	2.000	2.500	1.875	1.531	6-32
70	2.563	2.188	3.250	2.000	1.625	6-32
90	3.188	2.688	2.875	2.563	2.125	8-32
110	4.000	3.375	3.750	3.250	2.750	8-32
140	4.500	4.000	5.125	3.750	3.250	10-32
160	5.125	4.188	5.063	4.375	3.250	10-32
180	7.500	6.500	6.500	6.500	5.750	¼-20

STANDARD CASES

** Two Diagonally Opposite Mounting Holes Are Omitted.*
*** All Mounting Holes Are Tapped.*

The above data refers only to cases carried in stock and available for quick delivery. Special cases will be supplied whenever the standard line does not meet the necessary requirements.

Suppliers to manufacturers demanding highest quality

NEW YORK TRANSFORMER CO.
51 WEST 3rd ST., NEW YORK, N. Y.

Send for latest folder.

NOW ... when they're needed most
TUNGSTEN LEAD-IN WIRES

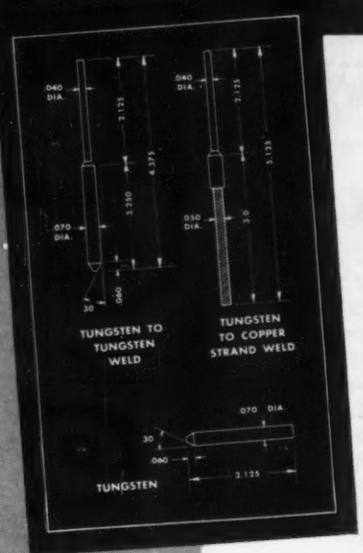

METROLOY for efficiency

You can get METROLOY tungsten lead-in wires for your vital Army, Navy and Air Corps electronic applications. Available to meet the individual specifications of tube manufacturers. Inquiries are held in confidence. METROLOY can assure an adequate supply of those vital lead-in assemblies. Why not write today? Collaborate with a METROLOY engineer—no obligation. Metroloy Company, 60 East Alpine Street, Newark, N. J.

METROLOY CONTACTS

Metroloy Tungsten Contacts, purposely designed to reduce pitting and cracking, are available for all applications.

METROLOY TUNGSTEN PRODUCTS

TUNGSTEN LEAD-IN WIRES · TUNGSTEN WELDS · TUNGSTEN & MOLYBDENUM SUPPORTS FOR ELECTRONIC APPLICATIONS · TUNGSTEN CONTACTS FOR ELECTRICAL APPLICATIONS

mixed with the liquid in the sampling chamber. Any increase in sampling chamber conductivity due to the presence of such gas upsets the balance of the bridge and current proportional to the unbalance flows in the sensitive relay circuit, actuating an alarm.—Lamb, ELECTRONICS, December, 1940, p. 35.

Watt-Hour Meter Tester

THE DIRECT CURRENT in the anode circuit of a vacuum tube oscillator may be caused to change by introducing a metallic vane or shield between tube output and load circuits thereby altering the coupling between the two; or by introducing a metallic vane between an oscillator input and feedback coils, or into an oscillator field in such a manner that the frequency of oscillation is altered. The vane may be made of non-magnetic material and may be small and light, two factors which provide the basis for electronic control where magnetic or mechanical loading of the controlled device must be held to a minimum.

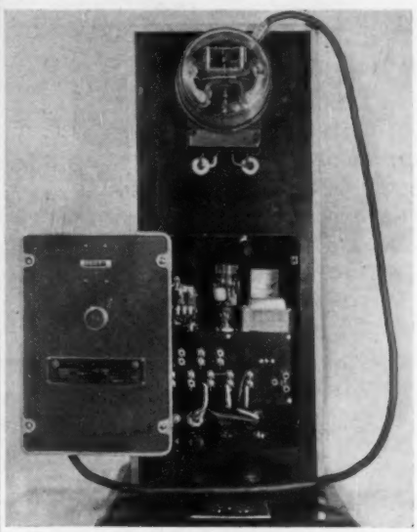

Electronic watt-hour meter tester. It counts the number of revolutions made by the meter disc or compares the speed of a test meter with that of a standard meter

The watt-hour meter tester pictured here and designed by Wheelco Instrument Co., uses the oscillator frequency-change principle. A small aluminum vane is mounted on the revolving disc of the meter to be tested. The vane passes between turns of wire in a pickup coil coupled to the tuned circuit of a remote oscillator through a flexible co-axial ca-

LUMARITH

REG. U.S. PAT. OFF

plastics are available in many forms and formulae for *Insulation*

For a fast-growing range of applications LUMARITH helps speed production and generally improves product performance. The properties listed below illustrate a *few* of the reasons. LUMARITH is available in sheets, rods, tubes, molding powders, transparent film from .0005″, and dopes.

CELANESE CELLULOID CORPORATION

Division of Celanese Corporation of America

A LARGE COUPON FOR A LARGE SUBJECT

Celanese Celluloid Corporation,
180 Madison Ave., New York City

I am interested in the applications checked . . .

- ☐ Turn insulation on wire.
- ☐ Layer insulation.
- ☐ Slot insulation.
- ☐ Molded parts.
- ☐ Laminated parts.

LUMARITH *Plastics have these properties:*

Give me more information on the factors checked . . .

- ☐ Dielectric strength 2,000 to 2,500 volts per mil.
- ☐ Low moisture absorption—resistant to humidity. Does not dry out with age.
- ☐ Impervious to water—provide effective water barrier.
- ☐ Resistant to salt water.
- ☐ Unaffected by mineral oils and ordinary varnish solvents such as naphtha, toluol, alcohol. Resist weak acids.
- ☐ Slow burning — comparatively non-inflammable.
- ☐ High resistance to mechanical abrasion.
- ☐ Stable at temperatures up to 257° F. (125° C.) when protected from air.
- ☐ Absolutely non-corrosive to copper.
- ☐ Germproof.
- ☐ Cement easily, firmly (actually a weld).

*Name*_____ *Company*_____

*Address*_____

Precision . . . MEASURING INSTRUMENTS

For the

RESEARCH WORKER
RECEIVER DESIGNER
PRODUCTION ENGINEER



Boonton Radio Engineers have devoted the past seven years to the development of precision measuring instruments for the research worker, the equipment designer, and the production engineer, with the result that these devices are universally recognized as standard equipment throughout the radio and allied industries.

The well-known Q-Meter was the first of a series of pioneering instruments and has proved of great value for the rapid determination of the ratio of reactance to resistance of coils or condensers used in circuit design. It was followed by instruments such as the Noise Meter, the Wide Range Beat Frequency Generator, and the Frequency Modulated Signal Generator. Boonton Radio Corporation is constantly furthering its research activities so that essential measuring instruments of the latest design are available to the industry. The principal products are briefly described below. More detailed information is contained in Catalog B, a copy of which will be sent upon request.



← Q-METER, TYPE 160-A

Frequency Range: 50 kc. to 75 mc. with internal oscillator and 1 kc. to 50 kc. with external oscillator.
Range of Q Measurements, Coils: 50 to 625.
Accuracy: In general ±5%.
Range of Q Tuning Condenser: 30-450 mmf, also Vernier Condenser: ±3 mmf.

Q-METER, TYPE 170-A →

Frequency Range: 30 mc. to 200 mc.
Range of Q Measurements, Coils: 100-1200.
Accuracy: In general ±10%.
Range of Q Tuning Condenser: 10-60 mmf.



← QX CHECKER, TYPE 110-A

The factory counterpart of the Q-Meter. Compares fundamental characteristics of inductance or capacitance and Q under production line conditions with a high degree of accuracy, yet quickly and simply. Insures uniform parts held within close tolerances. Frequency range 100 kc. to 25 mc.

BEAT FREQUENCY GENERATOR, TYPE 140-A →

A single compact instrument which provides wide frequency and voltage coverage of generated signals.
Frequency Range: 20 cycles to 5 mc. in two frequency ranges.
Output Voltage Range: 1 millivolt to 32 volts.
Accuracy: ±3%.
Output Power: One watt into external load.

←FREQUENCY MODULATED SIGNAL GENERATOR, TYPE 150-A



Developed specifically for use in design of F. M. equipment. Frequency and Amplitude Modulation available separately or simultaneously. Direct reading controls. Frequency range: 41 mc. to 50 mc. and 1 mc. to 10 mc. Output voltage 1 microvolt to 1 volt.

Other instruments in this series are the Type 151-A, range 30 mc. to 40 mc., Type 152-A, range 20 mc. to 28 mc.

BOONTON RADIO CORPORATION
BOONTON, NEW JERSEY U.S.A.

ble. Passage of the vane through the pickup coil field indirectly alters the frequency of the oscillator, changing its anode current. Anode current changes operate a sensitive d-c relay which operates a magnetic counter. The number of revolutions of the meter disc in a given time with a given load is counted electronically. —ELECTRONICS, April, 1942 p. 82.

Ballistic Speedmeter

THE TIME REQUIRED for an object, such as an automobile, to pass between two fixed points may be used to operate a circuit containing a recording ballistic galvanometer to determine the speed of that object in any arbitrary units, miles per hour, feet per second, etc. Either phototube relays or mechanical switches may be located at the fixed points to operate the circuit. A

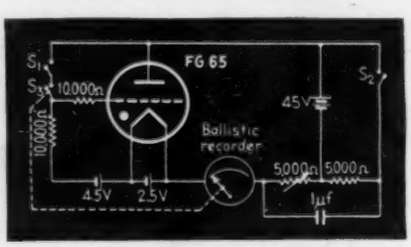

Ballistic speed meter circuit. Current flows through the ballistic galvanometer between the momentary closings of S_1 and S_2

thyratron is caused to conduct current when the object passes the first fixed point (S_1 closes momentarily) and to cease flowing when the object reaches the second point (S_2 closes momentarily). The mass of the moving element in the galvanometer is such that one-quarter of its natural period exceeded the longest time to be measured. With a moving mass of about 4 ounces and a spring tension such that the period was two seconds, the graph of time intervals versus deflection for a constant current corresponding to an automobile speed over a distance of 15 feet of 20 miles per hour is approximately 0.61 second. S_1 with S_2 is actuated by the moving element of the galvanometer to prevent acceptance of another indication until the stylus of the recorder is at rest. The record is made by a heated recording stylus moving over waxed paper.—Reich and Toomim, *Review of Scientific Instruments*, February 1941, p. 96.

Ears of the Signal Corps!

Serving the cause of Victory

For training—for action—the U. S. Army Signal Corps demands sensitive, *reliable* Radio Phones.

Precision - built Murdock Radio Phones are important aids to communication wherever the Army goes. In peace—in war—since 1904, Murdock has furnished 'scientific ears' for the Signal Corps.

Murdock
RADIO PHONES

MURDOCK MANUFACTURING COMPANY—Chelsea, Mass.

DeJur-Amsco

VITAL EQUIPMENT FOR THE ARMED FORCES

Instruments

DEJUR

Dependable equipment is now serving with the United Nations in the air, on the land and the sea. Our Facilities are at your disposal in meeting your requirements on War contracts. Write today for information on the following DeJur products.

Aviation Instruments.

Single and dual Cylinder Temperature Indicators.

Aviation Voltmeters and Ammeters.

Electrical Instruments.

Rheostats and Potentiometers.

Photo Exposure Meters.

Photographic Enlargers.

Photo Cells.

If you have a special problem, may we have an opportunity to cooperate?

RHEOSTATS
POTENTIOMETERS

DeJur-Amsco Corporation

TO BE SURE BUY DeJUR

SHELTON, CONNECTICUT

TUBES

Index of tubes published in this department since January 1942 128

Industrial Tubes 129

INDEX

Cathode-Ray Tubes

Type	Diameter of Screen	Issue	Page
2501A3	3 inches	Jan 42	96
2501C3	3 inches	Jan 42	96
2503A3	3 inches	Feb 42	88
2503C3	3 inches	Feb 42	88
2505A5	5 inches	Feb 42	88
2505C5	5 inches	Feb 42	89
2507A5	5 inches	Feb 42	89
2507B5	5 inches	Jan 42	97
2507C5	5 inches	Jan 42	97
2509A5	5 inches	Jan 42	97
2509C5	5 inches	Jan 42	97
2511A5	5 inches	Jan 42	96
2511B5	5 inches	Feb 42	89
2511C5	5 inches	Feb 42	89
2511D5	5 inches	Feb 42	90
2512A9	9 inches	Feb 42	90
2512B9	9 inches	Feb 42	90
2512C9	9 inches	Feb 42	90
2514A9	9 inches	Mar 42	98
2514B9	9 inches	Mar 42	98
2514C9	9 inches	Mar 42	98
2514D9	9 inches	Apr 42	110
2519A14	14 inches	Apr 42	110
2519B14	14 inches	Apr 42	112
2519C14	14 inches	Mar 42	100
2519D14	14 inches	Apr 42	112
2520A20	20 inches	Mar 42	100
2520B20	20 inches	Mar 42	102
2520C20	20 inches	Apr 42	112
2520D20	20 inches	Mar 42	102
2529A5	5 inches	Apr 42	112
2529B5	5 inches	Apr 42	114
2529C5	5 inches	Apr 42	114
2529D5	5 inches	Apr 42	114
2530A9	9 inches	Apr 42	114
2530B9	9 inches	Apr 42	116
2530C9	9 inches	Apr 42	116
2530D9	9 inches	May 42	94
2532A20	20 inches	Mar 42	102
2532B20	20 inches	Mar 42	102
2532C20	20 inches	Mar 42	102
2532D20	20 inches	Mar 42	102
2533A5	5 inches	May 42	95
2533B5	5 inches	May 42	95
2533C5	5 inches	May 42	95
2533D5	5 inches	May 42	95

Receiving Tubes

Type	Function	Issue	Page
6AH5G	Beam power amplifier, $P_o = 10.8$	Mar 42	98
6C5GT/G	Triode, $\mu = 20$	Jan 42	94
6F6GT/G	Pentode power amplifier, $P_o = 3.2$	Jan 42	96
6J5GT/G	Triode, $\mu = 20$	Jan 42	94
6SC7GT	Double triode, $\mu = 70$	Mar 42	98
6ST7 (M)	Double diode, triode, $\mu = 16$	Feb 42	88
6Y3G	Half-wave rectifier, $E_p = 5000$	Mar 42	98
7S7 (GL)	Triode-heptode converter, $g_c = 600$	Jan 42	95
7T7 (GL)	Pentode voltage amplifier, $g_m = 4900$	May 42	94
7W7 (GL)	Pentode voltage amplifier, $g_m = 5800$	Jan 42	94
14S7 (GL)	Triode-heptode converter, $g_c = 525$	Jan 42	94
14W7 (GL)	Pentode voltage amplifier, $g_m = 5800$	Jan 42	94

Injection Molded Mycalex

DESIGN CONSIDERATIONS

The General Electric Plastics Department's development of a technique for the injection molding of G-E mycalex has greatly expanded applications for this material. A mixture of ground mica and specially prepared glass, G-E mycalex is particularly valuable in parts for radio and electronics equipment. The following design features indicate the increased scope possible with the injection molding method.

RELATIVELY INTRICATE SHAPES

Injection molding permits greater latitude in shape and dimension without sacrificing physical properties. Machining is not required on most parts.

HOLES AND INSERTS

Metallic inserts are readily molded and are firmly anchored in part. Use of inserts often simplifies assembly of finished parts and provides excellent terminals or contacts. Molded holes eliminate drilling, and tolerances on holes or part dimensions may be held close.

FABRICATION

G-E mycalex parts may be machined, filed or polished. Thin sheets may be punched.

THERMAL CONDUCTIVITY

Parts may be designed for use at high temperatures, as mycalex conducts heat away from points of incipient failure.

Injection molded mycalex has many other physical and chemical features which influence design of parts. G-E Plastics Department engineers are familiar, through experience and actual production, with problems of design and manufacture. Their services and suggestions may aid in the improvement of your product.

For information and descriptive booklet write Section H-5, Plastics Department, General Electric Co., **ONE PLASTICS AVENUE,** *Pittsfield, Mass.*

PLASTICS DEPARTMENT
GENERAL ELECTRIC

PD-50

Following Through . . .

PLANNING, action, and follow-through — the military strategists' all-important steps to Victory.

The Thordarson organization employs these same principles in helping you work out your transformer problems. Experienced engineers, skilled technicians, and seasoned production experts combine to give you the transformers you want when you want them.

THORDARSON

ELECTRIC MFG. COMPANY

500 WEST HURON STREET, CHICAGO, ILL.

Official Photographs U. S. Marine Corps.

Transformer Specialists Since 1895

INDEX CONTINUED

Industrial Tubes

Type	Name	Issue	Page
FG-17	Thyratron	June 42	130
FG-27-A	Thyratron	June 42	130
FG-32	Phanotron	June 42	132
FG-33	Thyratron	June 42	132
FG-57	Thyratron	June 42	132
FG-67	Thyratron	June 42	132
FG-81-A	Thyratron	June 42	132
FG-95	Thyratron	June 42	132
FG-104	Phanotron	June 42	132
FG-154	Thyratron	June 42	132
FG-166	Phanotron	June 42	134
FG-190	Phanotron	June 42	134
FG-235-A	Ignitron	June 42	134
FG-258-A	Ignitron	June 42	134
FG-271	Ignitron	June 42	136
FP-85	Kenotron	June 42	136
FP-92	Kenotron	June 42	136
GL-411	Kenotron	June 42	136
GL-415	Ignitron	June 42	136
KC-4	Kenotron	June 42	138
KU 610	Thyratron	June 42	138
KU 618	Grid Glow	June 42	138
KU 627	Tnyratron	June 42	138
KU 628	Thyratron	June 42	139
KU 634	Thyratron	June 42	139
KU 636	Thyratron	June 42	139
KU 676	Thyratron	June 42	139

Industrial Tubes

Type FG-17

General Electric

THYRATRON; grid-controlled gaseous-discharge rectifier; glass envelope; overall height 6⅝ inches (max); diameter 2 7/16 inches (max); 4-pin base.

E_f = 2.5 v
I_f = 5.0 amp
Peak Plate Voltage = 2500 v
Peak Anode Current = 2.0 amp
Avg Anode Current = 0.5 amp
Grid Voltage for Starting—Negative
Temp Range, Condensed Mercury = 40—80° C



FG-17 FG-27A
FG-57 FG-81A

Type FG-27-A

General Electric

THYRATRON; grid-controlled gaseous-discharge rectifier; glass envelope; overall height 7.25 inches (max); diameter 3 inches (max); 4-pin base.

E_f = 5.0 v
I_f = 4.5 amp
Peak Anode Voltage = 1000 v
Peak Anode Current = 10.0 amp
Avg Anode Current = 2.5 amp
Grid Voltage for Starting—Negative
Temp Range, Condensed Mercury = 40—80° C



FG-17 FG-27A
FG-57 FG-81A

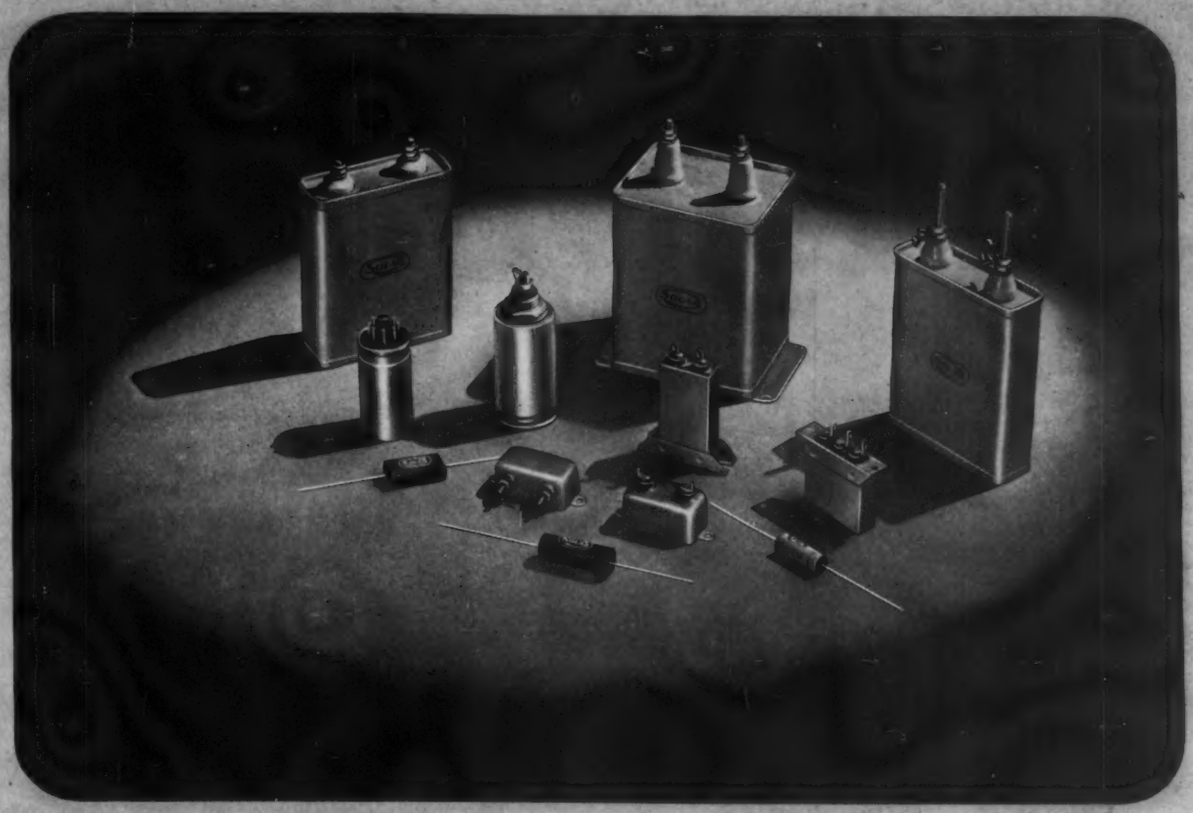

PAPER CAPACITORS—*at their best!*

Solar experience plays a vital part in the production

of completely dependable paper capacitors for the

Armed Service Branches of our Government.

Consult Solar for prompt solution
of your paper capacitor problems

SOLAR MFG. CORP. . . . . BAYONNE, N. J.

SOLAR

"QUALITY ABOVE ALL" CAPACITORS

How does the insulating material you are now using compare with

MYCALEX
THE INSULATOR
Trade Mark Reg. U. S. Patent Off.

Has your present insulating material these properties?:

Resistivity..10⁸ megohms per cubic centimeter
Surface Breakdown—Between 1½" space electrodes .....25,000 volts
Dielectric Constant—at 15°C..1000 Cycles 6.1
Dielectric Strength—at 20° C..... .125 in. = 350 v/mil. .250 in. = 308 v/mil. .5 in. = 240 v/mil.
Power Factor. Temp. 17 C. at audio frequencies ..... .005; Temp. 17 C. at radio frequencies ...002 to .003

MYCALEX insulating material (Leadless Grade*) has the above electrical properties and in addition has this GREAT MECHANICAL STRENGTH:

Compression Strength 15,000 to 25,000 lbs. per sq. in.
Tensile Strength..6,400 to 7,300 lbs. per sq. in.
Transverse Strength.....9,370 lbs. per sq. in.
Bending Strength.....10,000 lbs. per sq. in.

* *There is a difference: MYCALEX insulating material is LEADLESS. It offers improved insulating properties, and can be machined more easily and more quickly to accurate measurements. Mark your specifications: "'LEADLESS' MYCALEX insulating material."*

•

MYCALEX insulating material is now being supplied from the new large plant (Clifton, N. J.) of the EXCLUSIVE AMERICAN LICENSEES under all British patents: MYCALEX CORPORATION OF AMERICA. Sales Headquarters at 7 E. 42 St., New York City.

MYCALEX insulating material is supplied in 14" x 18" sheets, nine thicknesses ⅛" to 1". Also in round rods (½", ⅝", ¾", 1") and hexagonal rods ⅞" and 1⅛"—all rods 18" long, except ½" round, which is 14".

MYCALEX insulating material—although it is a ceramic—*can be machined.* Many users machine it themselves; our own new, large machine shop is well-equipped to cut, drill, tap, machine, grind and polish MYCALEX insulating material to your exact specifications.

FREE—New booklet

Send coupon or write postal for new 12-pg. booklet, generously illustrated with factual photographs of sockets, coils, spacers, many other parts made of, or in conjunction with, MYCALEX insulating material. Contains helpful engineering data, complete description of properties, advice on machining, suggestions for new uses in your business. Send for your copy today.

TEAR OFF COUPON NOW—before you forget.

Mycalex Corporation of America *Dept 2F*
7 E. 42 St., New York, N. Y.
Please send illustrated booklet.

Name .....
Street .....
City .....*State* .....

Type FG-32

General Electric

PHANOTRON; mercury-vapor, half-wave rectifier; glass envelope; overall height 6¾ inches; diameter 3 inches (max); 4-pin bayonet base.

E_f = 5.0 v
I_f = 4.5 amp
Tube Voltage Drop
= 24 v (max)
= 5 v (min)
Peak Plate Voltage = 1000 v
Peak Plate Current = 15 amp
Avg Plate Current = 2.5 amp
Temp Range, Condensed Mercury = 30—80° C



FG-32

Type FG-33

General Electric

THYRATRON; grid-controlled gaseous-discharge rectifier; glass envelope; overall height 7¼ inches (max); diameter 3 inches (max); 4-pin base.

E_f = 5.0 v
I_f = 4.5 amp
Peak Anode Voltage = 1000 v
Avg Anode Current = 2.5 amp
Grid Voltage for Starting—Positive
Peak Anode Current = 15 amp
Temp Range, Condensed Mercury = 35—80° C

FG-33
FG-67

Type FG-57

General Electric

THYRATRON; grid-controlled gaseous-discharge rectifier; glass envelope; overall height 7¼ inches (max); diameter 3 inches (max); 4-pin base.

E_f = 5.0 v
I_f = 4.5 amp
Peak Anode Voltage = 1000 v
Peak Anode Current = 15 amp
Avg Anode Current = 2.5 amp
Grid Voltage for Starting—Negative
Temp Range, Condensed Mercury = 40—80° C

FG-17 FG-27A
FG-57 FG-81A

Type FG-67

General Electric

THYRATRON; grid-controlled gaseous-discharge rectifier; glass envelope; overall height 7 inches (max); diameter 3 inches (max); 4-pin base.

E_f = 5.0 v
I_f = 4.5 amp
Peak Anode Voltage = 1000 v
Peak Anode Current = 15 amp
Avg Anode Current = 2.5 amp
Grid Voltage for Starting—Variable
Temp Range, Condensed Mercury = 40—80° C

FG-33
FG-67

Type FG-81-A

General Electric

THYRATRON; grid-controlled gaseous-discharge rectifier; inert-gas filled; glass envelope; overall height 6⅝ inches (max); diameter 2 7/16 inches (max); 4-pin base.

E_f = 2.5 v
I_f = 5.0 amp
Peak Anode Voltage = 500 v
Peak Anode Current = 2.0 amp
Avg Anode Current = 0.5 amp
Grid Voltage for Starting—Negative
Temp Range, Ambient = −20—+50° C

FG-17 FG-27A
FG-57 FG-81A

Type FG-95

General Electric

THYRATRON; grid-controlled gaseous-discharge rectifier; glass envelope; overall height 5 1/16 inches (max); diameter 3 inches (max) plus one-half inch for grid cap on side of envelope; 4-pin base.

E_f = 5.0 v
I_f = 4.5 amp
Peak Anode Voltage = 1000 v
Peak Anode Current = 15 amp
Avg Anode Current = 2.5 amp
Grid Voltage for Starting—Variable
Temp Range, Condensed Mercury = 40—80° C



FG-95

Type FG-104

General Electric

PHANOTRON; mercury-vapor, half-wave rectifier; glass envelope overall height 11 inches; diameter 3 1/16 inches (max); 4-pin bayonet base.

E_f = 5.0 v
I_f = 10.0 amp
Peak Plate Voltage = 3000 v
Peak Plate Current = 40 amp
Avg Plate Current = 6.4 amp
Tube Voltage Drop
= 24 v (max)
= 5 v (min)
Temp Range, Condensed Mercury 40—80° C

FG-104

Type FG-154

General Electric

THYRATRON; grid-controlled gaseous-discharge rectifier; inert-gas filled; glass envelope; overall height 7 1/16 inches; diameter 3 inches (max) plus one-half inch for grid cap on side of envelope; 4-pin base.

E_f = 5.0 v
I_f = 7.0 amp
Peak Anode Voltage = 500 v
Peak Anode Current = 10.0 amp
Avg Anode Current = 2.5 amp
Grid Voltage for Starting—Negative
Temp Range, Ambient = −20— +50°C



FG-154

When Designing Electronic Control Equipment

Include Vibration Control with

LORD

BONDED RUBBER

MOUNTINGS

PLATE FORM

TUBE FORM



VERTICAL SNUBBING (V.S.) PLATE FORM

VERTICAL SNUBBING (V.S.) TUBE FORM

FLEXIBLE COUPLING

These efficient shear-type bonded rubber mountings will isolate vibration and reduce operating fatigue to a minimum. Their effectiveness is based on the use of shear-stressed rubber (synthetic rubber, if desired) which deflects more readily than rubber under compression or tension and yet provides sufficient stability.

Lord Plate Form Mountings are made with square, round or diamond outer plates or in stamped holders. They can be used singly or in series for supporting loads from ½ to 300 pounds.

Lord Tube Form Mountings consist of two metal tubes bonded in position to rubber. Loads are carried and vibration is absorbed axially. Tube Form Mountings are used for equipment when exceptional radial stability is required. They are designed to carry loads from a few pounds up to 1500 pounds.

Lord Vertical Snubbing Mountings are made in both plate and tube forms for installations where heavy shock loads as well as vibratory forces are encountered. The "V-S" design effectively snubs shock loads without impairing vibration isolation characteristics.

Lord Flexible Couplings are one piece bonded rubber units that accommodate parallel and angular misalignment without inducing high bearing loads. Shear-stressed rubber provides effective absorption of torsional vibration and prevents transmission of sound through the shaft. Made in seven sizes up to and including 1 H.P. to fit all shaft sizes.

Other Lord Bonded Rubber Products include aircraft engine suspensions, joints for radial loading, torsion joints, diaphragms and instrument mountings. Special bonded rubber products can be designed and manufactured to meet individual requirements.

Lord's research facilities and wide knowledge of vibration engineering are available to every industry for the solution of problems in their field.



PLATE FORM



TUBE FORM



VERTICAL SNUBBING (V.S.) PLATE FORM

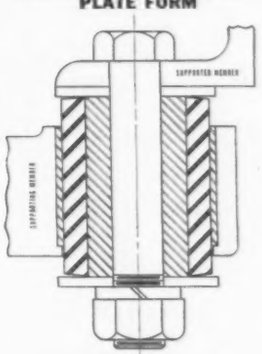

VERTICAL SNUBBING (V.S.) TUBE FORM



FLEXIBLE COUPLING

It takes rubber in shear to absorb vibration

LORD MANUFACTURING COMPANY ERIE, PA.

Research workers on war problems may find the answer in the following list

Ceramics:

Binder for ceramic insulation
Protective coating against mechanical abuse
Binder for vitreous enamels
Binder for abrasive wheels
Binder for porcelain enamel frit

Pharmaceuticals and Foods:

Edible emulsifying agent
Non-staining ointments
Edible fixative oil for candies
Binder for yeast tablets
Enteric coating
Polish for tablets and pills

Adhesives:

"Cellophane" and cellulose acetate adhesive
Tissue paper to aluminum adhesive
Adhesive for rubber to cloth
Thermosetting cement

Paints, Varnishes, Colors and Pigments:

Pulp color and pigment dispersing agent
Flattening agent for paints and varnishes
Emulsion paints
Lacquer and varnish plasticizer
Soft grinding of lake colors
Increased length of pigment lakes
Non-mar enamels
Water and ink resistant lacquers

Rubber and Synthetic Rubber:

Gasoline resistant finish
Rubber gasket lubricant
Rubber to cloth adhesion
Polishing of hard rubber
Plasticizing synthetic rubber

Metals:

Aluminum castings corrosion protection
Foundry cores
Joint seals for pipes
Aluminum drawing lubricant
Tin stamping lubricant
Nickel alloy stamping rust prevention
Metal surface protection
Drawing and stamping of nickel alloys
Sintered bearing lubricant

Paper:

Transparent coating
Waterproofing liquid
Flameproofing agent
Translucent paper
Wax coating

Textiles:

Transparent coating
Olive oil substitute
Waterproofing liquid
Textile lubricant
Flameproofing agent
Flexibilizer for cotton braid
Dye solvent
Textile emulsions
"Nylon" and "Vinyon" lubricant
Worsted and spun rayon lubricant

Cork:

Cork preservative

Cements:

Waterproofing agent

Wood:

Warpage prevention
Flameproofing

Leather:

Sulphonated oil substitute

Plastics:

Plasticizer and lubricant
Polishing
Lubricant for molding

•

Our laboratories have developed solutions to these unique problems. The answers to these and many other problems are given in a 112 page manual of chemical formulation for numerous industries. A copy of the manual "Chemicals by Glyco" is yours for the asking. Send for it today. You may find the answer to your w a r - t i m e problems. GLYCO PRODUCTS CO., INC., 230 King Street, Dept. 54, Brooklyn, N. Y.

Type FG-166

General Electric

PHANOTRON; mercury-vapor, half-wave rectifier; quick heating cathode; metal envelope; overall length 19½ inches (max); diameter 5 inches (max); flexible leads.

E_f = 2.5 v
I_f = 100 amp
Tube Voltage Drop
= 20 v (max)
= 5 v (min)
Peak Plate Voltage = 1500 v
Peak Plate Current = 150 amp
Avg Plate Current = 30 amp
Temp Range, Condensed Mercury = 20—70° C

Type FG-190

General Electric

PHANOTRON; inert-gas-filled, full-wave rectifier; metal envelope; overall height 4⅛ inches (max); diameter 1 1/16 inch (max); supplied with lead wires.

E_f = 2.5 v
I_f = 12 amp
Tube Voltage Drop
= 13 v (max)
= 5 v (min)
Peak Plate Voltage = 175 v
Peak Plate Current = 5.0 amp
Avg Plate Current = 1.25 amp
Temp Range = − 20—+60° C

Type FG-235-A

General Electric

IGNITRON; high-peak-current, pool-cathode tube; water cooled; for welding service; metal envelope; height 9½ inches (max); diameter 4¼ inches (max).

Supply Voltage (rms)
= 250—600 v
Demand = 1200 kva
Corresponding Avg Anode Current = 75.6 amp
Max Avg Anode Current
= 140 amp
Corresponding Demand
= 400 kva
Ignitor Voltage = 200 v
Ignitor Current = 40 amp

Type FG-258-A

General Electric

IGNITRON; high-peak-current, pool-cathode tube; water cooled; for welding service; metal envelope; height 12 inches; diameter 5⅝ inches (max).

Supply Voltage = 250—600 v
Demand = 2400 kva
Corresponding Avg Anode Current = 192.0 amp
Max Avg Anode Current
= 355 amp
Corresponding Demand
= 800 kva
Ignitor Voltage = 200 v
Ignitor Current = 40 amp

WHEREVER THERE IS RADIO
THERE ARE SPRAGUE CONDENSERS

Sprague Condensers are made to the highest quality standards in a complete line meeting practically every electronic, electrical and industrial need. It is natural then, that today's production is largely devoted to a complete, fully approved assortment for Army and Navy uses. Our engineers will gladly cooperate in solving your capacitor problems.

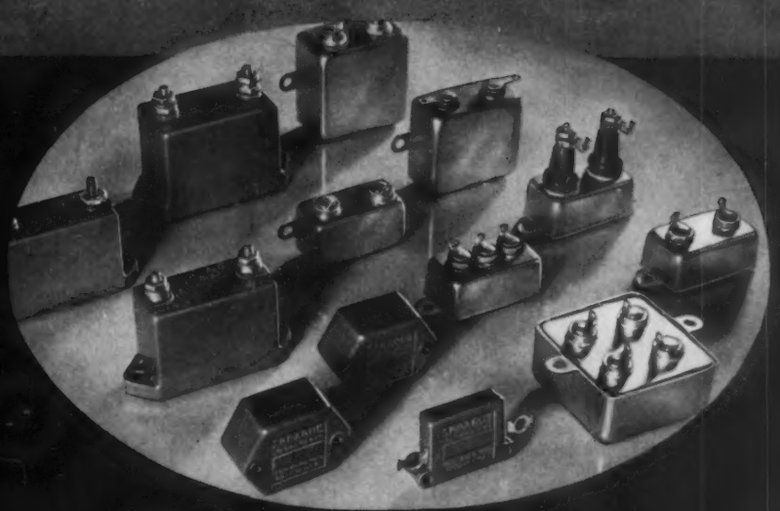



SPRAGUE
CONDENSERS—KOOLOHM RESISTORS

Quality Components • Expertly Engineered • Competently Produced

SPRAGUE SPECIALTIES COMPANY, NORTH ADAMS, MASS.

★ Yes indeed, it pays to follow the example of leading equipment builders, instrument makers, communication companies, broadcasters and other critical users of components: Let Clarostat solve your resistance problem!

Because Clarostat has a wider choice of resistors, controls and resistance devices, due to a wide range of fabrication facilities, you can usually take care of your requirements more critically when you depend on Clarostat. For instance:

Controls . . .

Clarostat composition-element controls are the last word in high-resistance potentiometers. Accurate resistance values, first and last. 1000 ohms to 5 megohms. Ad-A-Switch feature. Choice of tapers and taps. ★ Clarostat wire-wound controls or potentiometers, 1 to 100,000 ohms, choice of tapers and taps. Single or multiple units. ★ Clarostat power rheostats, 25 and 50 watt ratings, built for hardest kind of service. ★ Also faders, padders, mixers, attenuators, etc.

Resistors . . .

Greenohms—those green-colored cement coated power resistors found in quality transmitters, oscillographs, fine instruments and dependable electronic assemblies—are positively the toughest power resistors made. 4 to 200 watts. Fixed and adjustable. Round and flat. Any mounting or terminals. ★ Also choice of voltage divider strips, voltage-dropping power cords, etc.

Ballasts . . .

Tube-type plug-in resistors, line-voltage reducers, automatic line-voltage regulators, etc.

Submit that Problem . . .

No matter what your control or resistance problem may be, send it to us for engineering collaboration, recommendations, specifications, quotations. Engineering loose-leaf data on request.

CLAROSTAT *Manufacturing Co. Inc.*
285-287 NORTH SIXTH STREET
BROOKLYN, NEW YORK, U.S.A.
• OFFICES IN PRINCIPAL CITIES •

Type FG-271

General Electric

IGNITRON; high-peak-current, pool-cathode tube; water cooled; for welding service; metal envelope; height 8 inches (max); diameter 2¾ inches (max).

Supply Voltage (rms) = 250—600 v
Demand = 600 kva (max)
Corresponding Avg Anode Current = 30.2 amp
Maximum Avg Anode Current = 56.0 amp
Corresponding Demand = 200 kva
Ignitor Voltage = 200 v
Ignitor Current = 40 amp

Type FP-85

General Electric

KENOTRON; high-vacuum, half-wave rectifier; glass envelope; air cooled; overall height 6⅝ inches (max); diameter 2 7/16 inches (max); 4-pin base.

E_f = 10.0 v
I_f = 5.0 amp
Peak Inverse Anode Voltage = 20,000 v (max)
Peak Anode Current = 0.1 amp (max)

FP-85

Type FP-92

General Electric

KENOTRON; high-vacuum, half-wave rectifier; glass envelope; air cooled; overall height 25¼ inches (max); diameter 6¼ inches (max).

E_f = 10 v
I_f = 14.5 amp
Peak Inverse Anode Voltage = 150,000 v (max)
Peak Anode Current = 0.3 amp (max)

Type GL-411

General Electric

KENOTRON; high-vacuum, half-wave rectifier; glass envelope; air cooled; overall height 18¼ inches (max); diameter 5¼ inches.

E_f = 10 v
I_f = 14.5 amp
Peak Inverse Anode Voltage = 100,000 v (max)
Peak Anode Current = 0.3 amp

Type GL-415

General Electric

IGNITRON; high-peak-current, pool-cathode tube; water cooled; for welding service; metal envelope; overall height 5¼ inches; diameter 2¾ inches (max).

Supply Voltage (rms) = 250—600 v
Demand = 300 kva
Corresponding Avg Anode Current = 12.1 amp
Maximum Peak Anode Current = 22.4 amp
Ignitor Voltage = 200 v
Ignitor Current = 40 amp

MANY LARGE COMPANIES ARE NOW TAKING A CENSUS OF EMPLOYEES' CARS AS PART OF NATION'S PROGRAM TO GET 40,000,000 WORKERS TO THEIR JOBS ON TIME

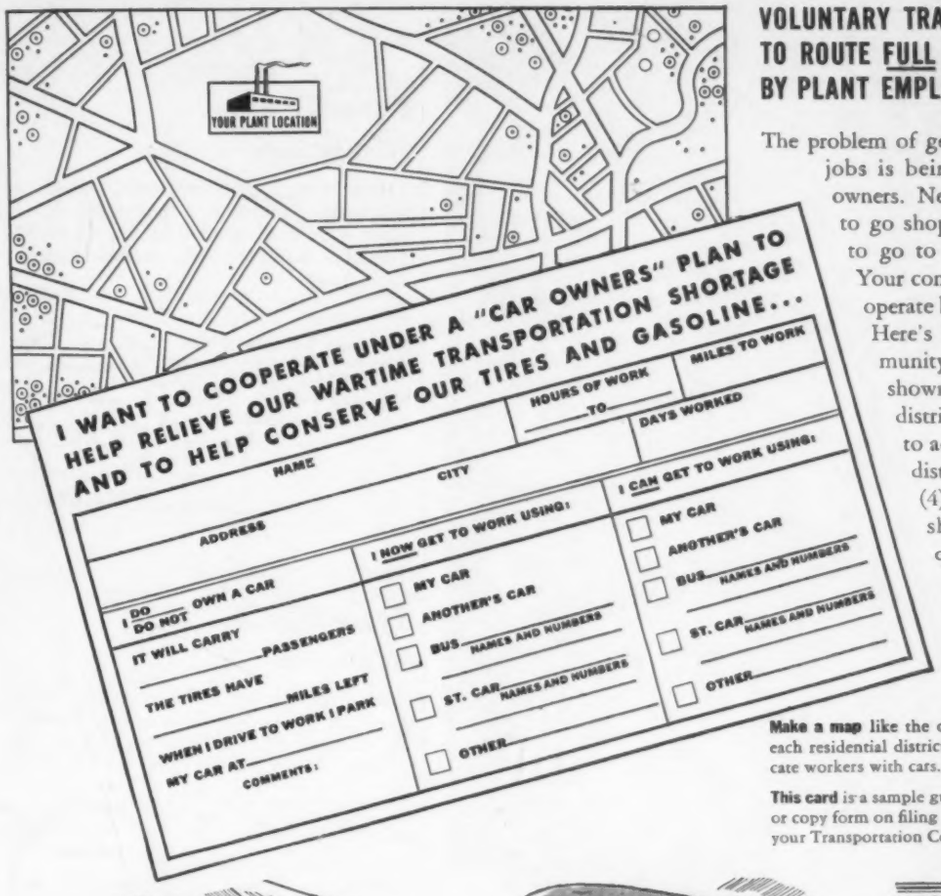
YOUR PLANT LOCATION
I WANT TO COOPERATE UNDER A "CAR OWNERS" PLAN TO HELP RELIEVE OUR WARTIME TRANSPORTATION SHORTAGE AND TO HELP CONSERVE OUR TIRES AND GASOLINE...
NAME
CITY
HOURS OF WORK
TO
MILES TO WORK
DAYS WORKED
ADDRESS
I DO / DO NOT OWN A CAR
IT WILL CARRY ____PASSENGERS
THE TIRES HAVE ____MILES LEFT
WHEN I DRIVE TO WORK I PARK
MY CAR AT
COMMENTS:
I HOW GET TO WORK USING:
MY CAR
ANOTHER'S CAR
BUS NAMES AND NUMBERS
ST. CAR NAMES AND NUMBERS
OTHER
I CAN GET TO WORK USING:
MY CAR
ANOTHER'S CAR
BUS NAMES AND NUMBERS
ST. CAR NAMES AND NUMBERS
OTHER

VOLUNTARY TRANSPORTATION COMMITTEES TO ROUTE FULL CARS TO WORK ARE SET UP BY PLANT EMPLOYEES IN EACH COMMUNITY

The problem of getting 40,000,000 workers to their jobs is being taken over by America's car owners. Neighbors are already doubling up to go shopping, to take children to school, to go to work . . . *but not enough of them!* Your company and your employees can cooperate by taking a census of workers' cars. Here's how you can do it in your community: (1) Fill out cards, like the one shown here, (2) Sort cards by residential districts, (3) Select sectional committees to act as traffic control groups for each district to assure equitable use of cars, (4) Route *full* cars to work on every shift. Details can be worked out quickly by you . . . your workers . . . your community. The important thing is to start today to get every last mile of use from our cars, our gas, our tires!

Make a map like the one above, on which to chart the routes for each residential district. Dots indicate workers' homes; circles indicate workers with cars.

This card is a sample guide. Make changes to suit your needs. Reprint or copy form on filing cards for each worker to fill out and turn in to your Transportation Committee.

Trolleys can't do it ALONE. Even with staggered work hours to level off transportation peaks there aren't enough trolleys to take America's millions to work.

Buses can't do it ALONE. They're already taxed to their full seating capacity. And enough vital steel and rubber can't be spared to build enough new buses.

Trains can't do it ALONE. Although every railroad is cooperating 100%, many of America's mighty war production plants can't be serviced by trains or subways.

HOW TO CONSERVE MECHANICAL RUBBER GOODS

This 48-page book is for managers, engineers and plant operating men. It shows how you can conserve rubber through proper handling, installation and care of rubber conveyor, elevator and transmission belts; all types of industrial hose; packings; linings; rolls; mountings; and other mechanical rubber goods; and electrical wires, cables, and tapes. For free copies, write directly to Mechanical Goods Division, United States Rubber Company.

GET FREE MILEAGE BUDGET CHARTS

and copies of this free 32-page book on tire care from your local U. S. Tire Dealer or write direct to the United States Rubber Company. Hundreds of thousands of these charts and books are already in the hands of American car owners — helping to save tires, gas and oil.



IN AMERICA'S FIGHT FOR LIFE, EVERY TIRE-MILE MUST BE SAVED FOR ESSENTIAL DRIVING

UNITED STATES RUBBER COMPANY

1230 Sixth Avenue • Rockefeller Center • New York

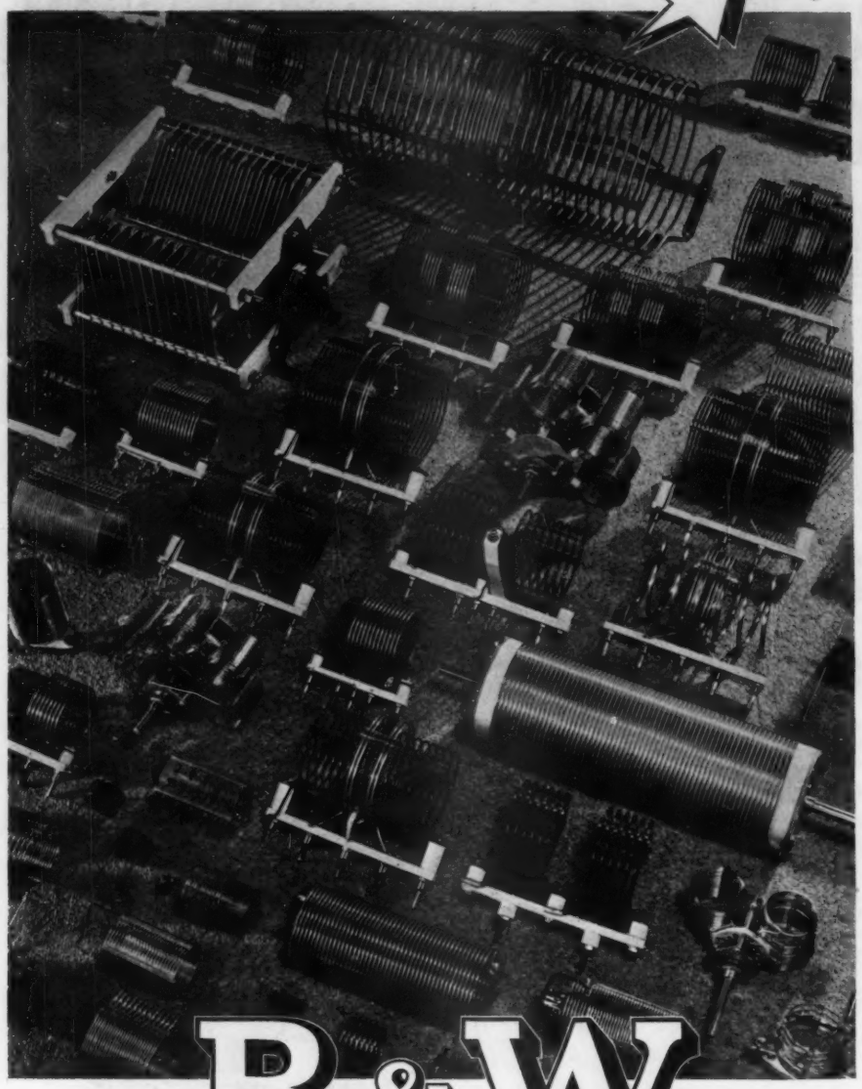

B&W

AIR INDUCTORS
VARIABLE AIR CONDENSERS

● There is that about a B&W Air Inductor or Variable Air Condenser which tells you more than words. This something is an outward evidence of inward goodness that comes as a result of conscientious manufacture by engineers by whom every product bearing their names is a matter of intense personal pride.

The above unretouched illustration shows a variety of standard and special B&W products now being supplied on priorities for today's exacting applications. Bulletins and engineering information upon request.

BARKER & WILLIAMSON, Radio Manufacturing Engineers
235 Fairfield Avenue, Upper Darby, Pa.

Type KC-4

General Electric

KENOTRON; high-vacuum, half-wave rectifier; glass envelope; air cooled; overall height 25½ inches (max); diameter 6¼ inches (max).

E_f = 20 v
I_f = 24.5 amp
Peak Inverse Anode Voltage = 150,000 v (max)
Peak Anode Current = 1.0 amp

Type KU-610

Westinghouse

THYRATRON; grid-controlled gaseous-discharge rectifier; inert-gas filled; glass envelope; overall height 6½ inches (max); diameter 2 7/16 inches (max); 4-pin base.

E_f = 2.5 v
I_f = 6.5 amp
Peak Anode Voltage = 500 v
Peak Anode Current = 0.4 amp
Avg Anode Current = 0.1 amp
Grid Voltage for Starting—Positive
Temp Range, Ambient = − 20— +70° C



KU-610

Type KU-618

Westinghouse

GRID GLOW tube; cold cathode; inert-gas filled; glass envelope; overall height 5¾ inches (max); diameter 2 3/16 inches (max); 4-pin base.

Peak Anode Voltage = 800 v
Peak Anode Current = 0.10 amp
Avg Anode Current = 0.015 amp
Grid Voltage for Starting—Positive
Temp Range, Ambient = − 20— + 70° C
Tube Voltage Drop
= 225 v (max)
= 180 v (avg)
= 125 v (min)

KU-618

Type KU-627

Westinghouse

THYRATRON; grid-controlled gaseous-discharge rectifier; glass envelope; overall height 7 inches (max); diameter 2 7/16 inches (max); 4-pin base.

E_f = 2.5 v
I_f = 6.0 amp
Peak Anode Voltage = 2500 v
Peak Anode Current = 2.5 amp
Avg Anode Current = 0.64 amp
Grid Voltage for Starting—Negative
Temp Range, Condensed Mercury = 25 − 70° C



KU-627 KU-628
KU-634 KU-636
KU-676

Type KU-628

Westinghouse

THYRATRON; grid-controlled gaseous-discharge rectifier; glass envelope; overall height 9¼ inches (max); diameter 3¼ inches (max); 4-pin base.

E_f = 5.0 v
I_f = 11.5 amp
Peak Anode Voltage = 2500 v
Peak Anode Current = 8.0 amp
Avg Anode Current = 2.0 amp
Grid Voltage for St arting—Negative
Temp Range, Condensed Mercury = 25—70° C

KU-627 KU-628
KU-634 KU-636
KU-676

Type KU-634

Westinghouse

THYRATRON; grid-controlled gaseous-discharge rectifier; glass envelope; overall height 9 inches (max); diameter 3⅛ inches (max); 4-pin base.

E_f = 5.0 v
I_f = 11.5 amp
Peak Anode Voltage = 7500 v
Peak Anode Current = 5.0 amp
Avg Anode Current = 1.25 amp
Grid Voltage for Starting—Negative
Temp Range, Condensed Mercury = 25—50° C

KU-627 KU-628
KU-634 KU-636
KU-676

Type KU-636

Westinghouse

THYRATRON; grid-controlled gaseous-discharge rectifier; inert-gas filled; glass envelope; overall height 7 inches (max); diameter 2$\frac{7}{16}$ inches (max); 4-pin base.

E_f = 2.5 v
I_f = 7.0 amp
Peak Anode Voltage = 350 v
Peak Anode Current = 0.4 amp
Avg Anode Current = 0.1 amp
Grid Voltage for Starting—Negative
Temp Range, Ambient = − 20— +70° C

KU-627 KU-628
KU-634 KU-636
KU-676

Type KU-676

Westinghouse

THYRATRON; grid-controlled gaseous-discharge rectifier; glass envelope; overall height 11⅞ inches (max); diameter 3⅞ inches (max); 4-pin base.

E_f = 5.0 v
I_f = 9.5 amp
Peak Anode Voltage = 1000 v
Peak Anode Current = 40.0 amp
Avg Anode Current = 6.4 amp
Grid Voltage for Starting—Negative
Temp Range, Condensed Mercury = 25—70° C



KU-627 KU-628
KU-634 KU-636
KU-676

MANUFACTURED FROM STANDARD PARTS . . .

Custom designed transformers can often be assembled from standard parts found in the large variety of types and sizes available to Chicago Transformer's customers.

Where entirely different designs are necessary, it's modern and complete plant and laboratory facilities are equipped to handle the most unusual assignments.

Given the application, description and the electrical results desired, the Chicago Transformer organization should best be able to solve your new and difficult transformer problems.

Manufacturers of all types of Transformers up to 10 KVA

CHICAGO TRANSFORMER
CORPORATION
3505 WEST ADDISON STREET • CHICAGO

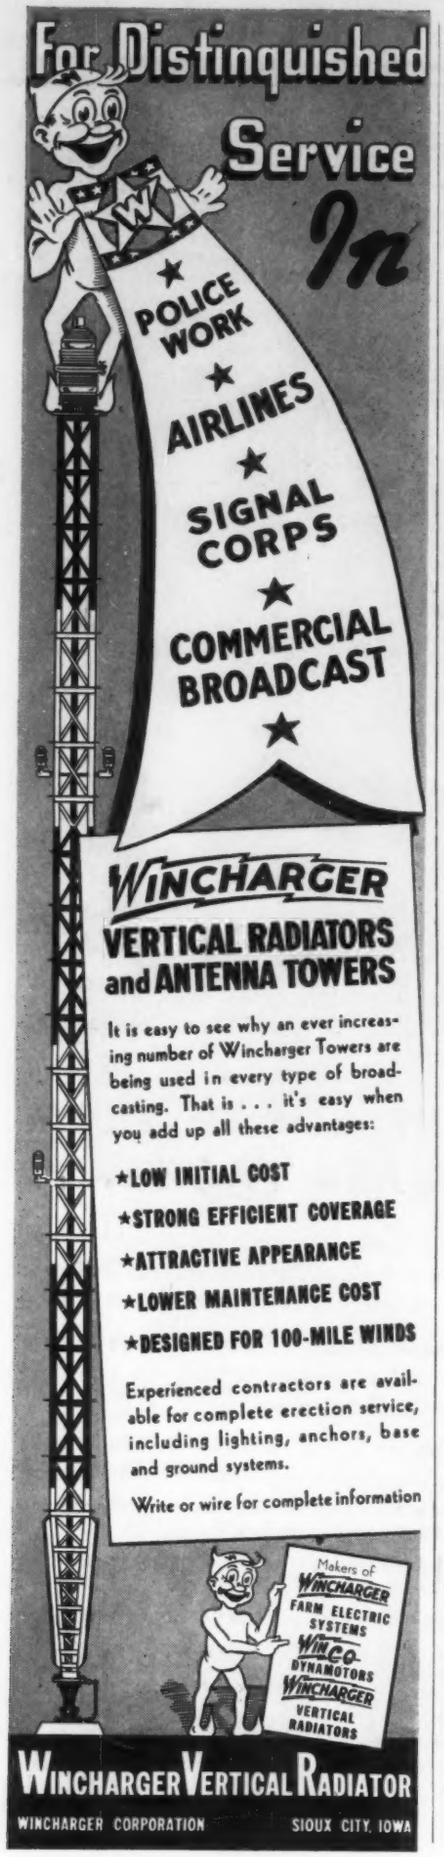
For Distinguished Service In
POLICE WORK
AIRLINES
SIGNAL CORPS
COMMERCIAL BROADCAST
WINCHARGER
VERTICAL RADIATORS and ANTENNA TOWERS
It is easy to see why an ever increasing number of Wincharger Towers are being used in every type of broadcasting. That is . . . it's easy when you add up all these advantages:
★LOW INITIAL COST
★STRONG EFFICIENT COVERAGE
★ATTRACTIVE APPEARANCE
★LOWER MAINTENANCE COST
★DESIGNED FOR 100-MILE WINDS
Experienced contractors are available for complete erection service, including lighting, anchors, base and ground systems.
Write or wire for complete information
Makers of
WINCHARGER FARM ELECTRIC SYSTEMS
WINCO DYNAMOTORS
WINCHARGER VERTICAL RADIATORS
WINCHARGER VERTICAL RADIATOR
WINCHARGER CORPORATION
SIOUX CITY, IOWA

THE ELECTRON ART

Optimum Response Scanning Slit-Image..... 140
Heating by High-Frequency Induction..... 142
Electronic Differentiation 143
The Relaxation Amplifier..... 145

Optimum Response Scanning Slit-Image

By George Logan

Sound Department
M-G-M Studios
Culver City, Cal.

In sound reproduction from film, a mechanism moves the sound track at uniform speed past a scanning beam. The track acts as a light modulator, and the modulated light transmitted through the film falls upon a phototube. A pulsating direct current is set up in the phototube circuit, and the amplified alternating component of that current operates the horns.

The scanning light is the image of a physical slit; the slit-image is created by an optical system such as is depicted in Fig. 1. Appearance of the slit-image is further illustrated in Fig. 2.

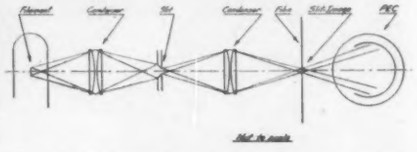

Fig. 1—Schematic arrangement of optical system of typical reproducer

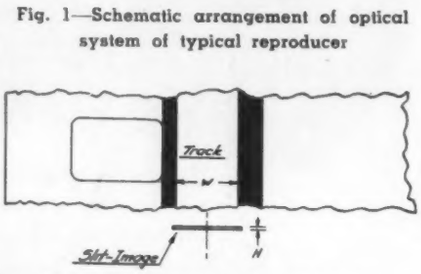

Fig. 2—Slit image and sound track

As is usual in most signal amplifying systems, it is desirable to secure an overall flat response up to some chosen cut-off frequency. To achieve this aim, the point of lowest level response must be determined, and equalization attenuation inserted to lower other regions of a response curve to that level. Yet, it is desirable to keep the amount of equalization attenuation inserted to a minimum. Such attenuation represents loss, and must be compensated for by increased amplifier capacity.

It has been well known that with a necessarily finite slit-image height, H, the relative response falls off with increasing frequency as shown by the curves of Fig. 5. It is logical, then, to determine the slit-image height which will present maximum relative response at the cut-off frequency. Once that optimum slit-image height is found, it will follow that the equalization attenuation chargeable to H will be a minimum. Hence the purpose of this investigation is to derive the formula for optimum H in terms of the cut-off frequency.

The symbols used in the derivation are:

T = track transmission, the ratio: (transmitted light)/(incident light),
y_m = maximum change in transmission from mean transmission,
λ = wavelength of cycle on track: $18000/f$,
θ = angular distance from cycle's origin,
ϕ = angular distance of slit-image center line from cycle's origin,
x = linear distance from cycle's origin,
Q_1 = incident light quantity,
Q_2 = transmitted light quantity,
H = slit-image height,
β = radians of cycle covered by $\frac{1}{2} H$
w = track width,
L = slit-image illumination intensity,
i = instantaneous value a-c and,
f = frequency, cycles per second.

Units employed are the radian for angles, the second for time, and the mil (0.001 inch) for linear distances.

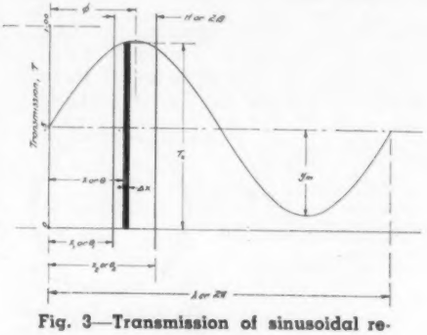

Fig. 3—Transmission of sinusoidal recorded cycle

Referring to Fig. 3, if a sine wave signal has been recorded, the light transmission along a cycle on the track is represented by a sine curve. For example, the transmission at x is T_x, and

$$T_x = \frac{\Delta Q_2}{\Delta Q_1}$$

$$\therefore \Delta Q_2 = (T_x)(\Delta Q_1)$$

$$= (y_m + y_m \sin\theta)(L\, w\, \Delta x)$$

Total quantity of light passed through the film is:

$$Q_2 = \sum_{x_1}^{x_2} \Delta Q_2$$

$$= \int_{x_1}^{x_2} (y_m + y_m \sin\theta)\, L\, w\, dx$$

To integrate, it is necessary to express dx in terms of $d\theta$.

$$\frac{x}{\theta} = \frac{\lambda}{2\pi}$$

$$dx = \frac{18000}{2\pi f}\, d\theta$$

Substituting above and integrating:

$$Q_2 = \frac{18000\, L\, w\, \beta\, y_m}{\pi f} + \frac{18000\, L\, w\, y_m}{\pi f} \sin\phi \sin\beta \qquad (1)$$

The incident light quantity presented to the film is:

$$Q_1 = L\, H\, w$$

$$\text{but } H = \frac{18000\, \beta}{\pi f}$$

$$\therefore Q_1 = \frac{18000\, L\, w\, \beta}{\pi f} \qquad (2)$$

Q_1 is a constant for any given optical system, which of course includes a fixed value for H. Substituting Eq. (2) into Eq. (1), we obtain:

$$Q_2 = Q_1\, y_m \left(1 + \frac{\sin\phi \sin\beta}{\beta}\right)$$

$$Q_2 = Q_1\, y_m \left(1 + \frac{\sin\phi \sin\dfrac{\pi f H}{18000}}{\dfrac{\pi f H}{18000}}\right) \qquad (3)$$

For any particular frequency we might choose to investigate, and for any particular value of H, the quotient $\dfrac{\sin\frac{\pi f H}{18000}}{\frac{\pi f H}{18000}}$ is a constant. From Eq. (3), therefore, it is apparent that scanning a recorded sine wave cycle will cause Q_2 to vary sinusoidally about an axis which is placed a distance $Q_1 y_m$ above the $Q_2 = 0$ line, as illustrated in Fig. 4. The maximum value of Q_2 must occur when $\sin\Phi = 1$, or at $\Phi = \pi/2$; and the minimum value of Q_2 must occur when $\sin\Phi = -1$, or at $\Phi = 3\pi/2$.

$$\therefore Q_{2\,max} = Q_1\, y_m \left(1 + \frac{\sin\frac{\pi f H}{18000}}{\frac{\pi f H}{18000}}\right)$$

$$\therefore Q_{2\,min} = Q_1\, y_m \left(1 - \frac{\sin\frac{\pi f H}{18000}}{\frac{\pi f H}{18000}}\right)$$

If we are working the linear range of the cell, which is assumed, the instantaneous current output of the cell is directly proportional to the amount of light falling on the cell.

$$i = k\, Q_2$$

Further, the signal output level of the cell depends upon the current swing; that is, upon the difference between i_{max} and i_{min}. We can express this difference in terms of y_m, Q, f, and H, it is seen. Our intention is to investigate the effect on response of H values, at different frequencies, so we assume y_m constant. Now if we arbitrarily select a reference set of conditions with, say, $H = 0.75$ mil and $f = 1000$ cps, we can write:

$$\text{Relative Response, decibels} = 20 \log (A/B) \qquad (4)$$

For Finer Co-ordination....remember
ONLY
WINCO GIVES YOU
ALTI-TEMP
The dynamotor specially designed to insure maximum efficiency at all operating altitudes and temperatures.
WINCO DYNAMOTOR
WINCHARGER CORP.
Quality Built WINCO DYNAMOTORS Insure
★COMPLETE DEPENDABILITY
★PERFECT BALANCE
★MINIMUM A. C. RIPPLE
★LOW VOLTAGE REGULATION
★COMPACTNESS and LIGHT WEIGHT
. . . .And, whatever your power problem, Winco Engineers will be glad to help you solve it. This service is free and without obligation. Why not consult us?
Makers of WINCHARGER FARM ELECTRIC SYSTEMS
WINCO DYNAMOTORS
WINCHARGER VERTICAL RADIATORS
WINCO DYNAMOTORS
WINCHARGER CORPORATION — SIOUX CITY, IOWA

Deliver DEFENSE PLASTIC PARTS Faster

BRAND LETTERING — DESIGNS and MARKINGS on Fuse Panels, Socket Bases and Other Parts!

AS PERFECT AS MOLDED LETTERING ITSELF

★ If you use plastic panels or other bakelite parts needed for communications systems of airplanes, tanks and other implements of war—it will PAY you to try Rogan "deep relief" BRANDING of lettering, designs and markings for economy, quality and speed!

SAVE DIE CHARGES and MOLDING COSTS



The fuse panel and socket base illustrated, typify the clear and sharp results others are getting with "deep relief" BRANDING on items approved by the U. S. Signal Corps and Ordnance Department.

"Deep Relief" BRANDING by Rogan is now being specified by large-scale producers of plastic panels and parts for DEFENSE.

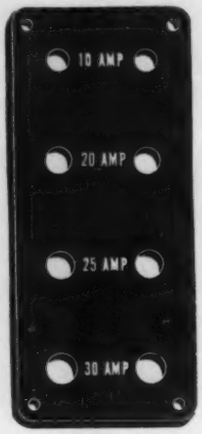

Above illustration shows laminated bakelite panel with Rogan *deep relief* branding.

WRITE TODAY for Full Details on Rogan Deep Relief Branding. No Obligation.

ROGAN BROTHERS 2003 S. Michigan Ave., Chicago, Illinois

EASTERN PLANT: 154 Lawrence St., Brooklyn, N. Y.

Doolittle

★ ★ ★ ★ ★ ★ ★ ★ ★ ★

EQUIPMENT HAS BEEN INDUCTED INTO THE SERVICE OF OUR COUNTRY FOR THE DURATION

THE ARMY • • THE NAVY • • THE AIR CORPS

● While we are proud that Doolittle equipment is helping to win the war, we do regret that we must ask our faithful customers to be patient, because the present need comes first. When peace comes we will be able to share with you the benefits of this broad experience which will be reflected in even better products.

Doolittle **RADIO INC.**

1421 LOOMIS BLVD. CHICAGO, ILL.

where A is current swing, for any combination of H and f and B is current swing, for $H = 0.75$ and $f = 1000$

Expressing current swing as indicated and simplifying:

$$R = 20 \log \left[\frac{7660 \sin \frac{\pi f H}{18000}}{f} \right]$$

To determine the H value which will give maximum response at some frequency, $\frac{d(R)}{dH}$ is equated to zero.

$$\frac{d(R)}{dH} = \frac{\pi f \log_e}{900} \cot \frac{\pi f H}{18000} = 0$$

$$\therefore H = \frac{9000}{f}$$

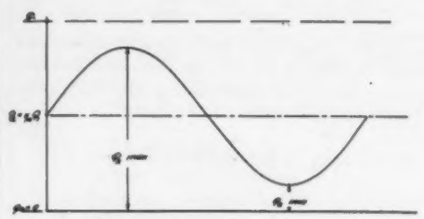

Fig. 4—Sinusoidal variation of transmitted light

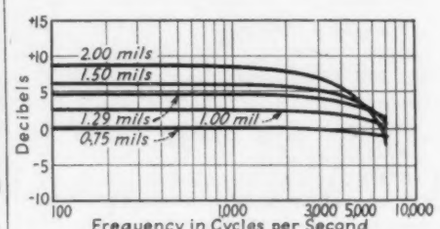

Fig. 5—Relative response of slit-image plotted against frequency

This Eq. (5) is the formula desired. Let us presume that the upper frequency to which we intend to equalize for flat response is 7000 cps. Then the optimum slit-image height is:

$$H = \frac{9000}{7000}$$
$$= 1.29 \text{ mils}$$

Each curve in Fig. 5 was obtained by selecting an H value, and solving Eq. (4) with various frequencies substituted therein. These curves show that only the 1.29 mil slit-image dimension will give maximum response at 7000 cps. Other values of H, whether larger or smaller, produce less response at that cut-off frequency, verifying the efficacy of Eq. (5).

• • •

Heating by High-Frequency Induction

THE PROBLEMS OF WARTIME production have accelerated the development of heating by high frequency induction. This method has the advantage in that heat can be induced into metals at points where it is wanted with most exacting control. Four pertinent articles on induction heating have appeared in the February 1942 issue of

Westinghouse Engineer. The first is on "Heating by High Frequency Induction" by Frank T. Chestnut; the second on "External Surface Hardening by Induction Heating" by W. E. Benninghoff and H. B. Osborn Jr.; the third on "Internal Surface Hardening by Induction Heating" by Howard E. Somes; and the fourth on "Electrical Equipment for Induction Heating" by C. C. Levy and L. J. Lunas.

The problems encountered in high frequency heating are much more involved than those of melting. If a charge is to be heated throughout to a uniform temperature, a low frequency should be selected for high depth of penetration and the power should be low enough to allow the interior of the charge to be heated by conduction from the surface nearly as fast as the surface itself is heated. On the other hand, if a charge is to be surface heated only, high frequency and high power are required.

Controlled temperatures up to 3600 deg. C have been attained in induction furnaces. Time cycles of only a few seconds may be obtained by automatic regulation of power and quenching intervals, thus assuring exact duplication of parts. Microscopically, the structure of an induction hardened area has a distinct appearance. The usual needle-like crystals resulting from furnace hardening are absent and instead we find a more homogeneous structure with finer nodular crystals.

High frequency hardening equipment consists of a high frequency generator, inductor, quenching auxiliaries, suitable transformers and capacitors, and automatic timing controls. Frequencies of from 60 cps to more than 100 kc have been used. A variety of generating equipment and of instruments is necessary to meet all requirements. Rotating equipment has been designed mainly for 500, 960, 1920, 3000, 9600 and 11,520 cps. Frequencies above 100 kc. are best obtained from electronic oscillators. They have the advantage of being non-rotating and are readily adaptable to changes in frequency. Small units up to 20 kilowatts are built with water-cooled tubes and when more capacity is required, several oscillators are connected in multiple.

Because an oscillator has no moving parts, and because its output frequency is variable, there have been attempts to replace motor-generator sets in the 500 to 12,000 cps field by electronic oscillators. However, the cost of the vacuum tube oscillator rises as the frequency is reduced and at present no economical low-frequency oscillators are available.

• • •

Electronic Differentiation

THE APPLICATIONS OF vacuum tube circuits to electronic differentiation are numerous: displacements can be converted into velocity, velocity into acceleration, quantity of electricity can be changed to current and sine wave

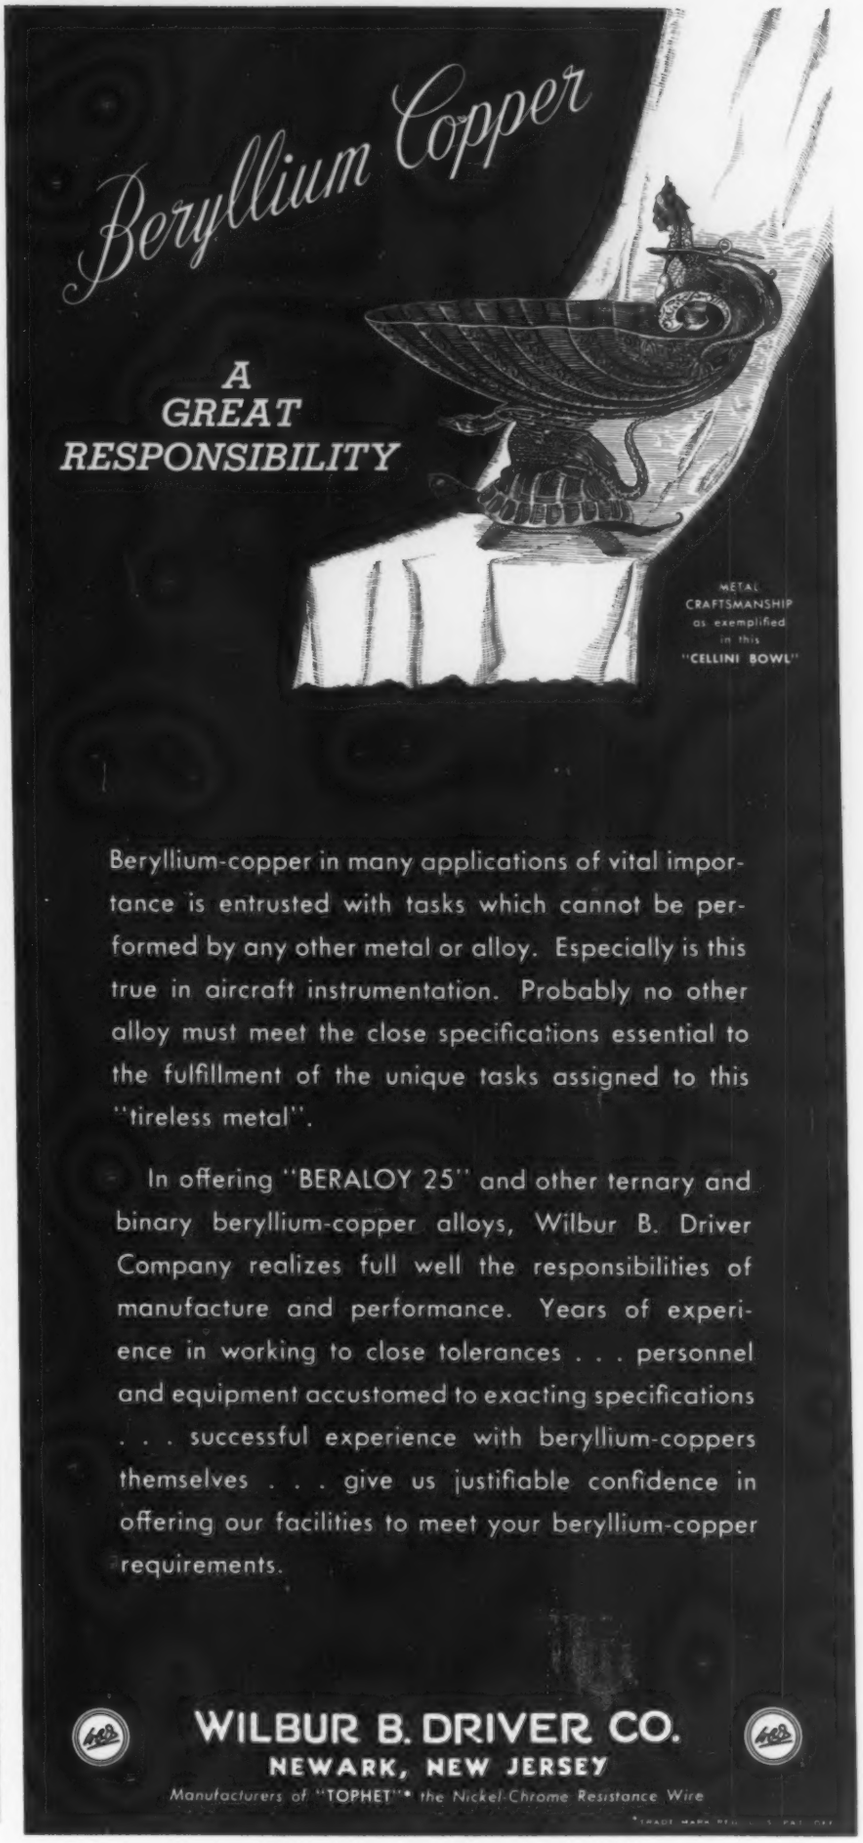
Beryllium Copper
A GREAT RESPONSIBILITY
METAL CRAFTSMANSHIP as exemplified in this "CELLINI BOWL"
Beryllium-copper in many applications of vital importance is entrusted with tasks which cannot be performed by any other metal or alloy. Especially is this true in aircraft instrumentation. Probably no other alloy must meet the close specifications essential to the fulfillment of the unique tasks assigned to this "tireless metal".
In offering "BERALOY 25" and other ternary and binary beryllium-copper alloys, Wilbur B. Driver Company realizes full well the responsibilities of manufacture and performance. Years of experience in working to close tolerances . . . personnel and equipment accustomed to exacting specifications . . . successful experience with beryllium-coppers themselves . . . give us justifiable confidence in offering our facilities to meet your beryllium-copper requirements.
WILBUR B. DRIVER CO.
NEWARK, NEW JERSEY
Manufacturers of "TOPHET"* the Nickel-Chrome Resistance Wire

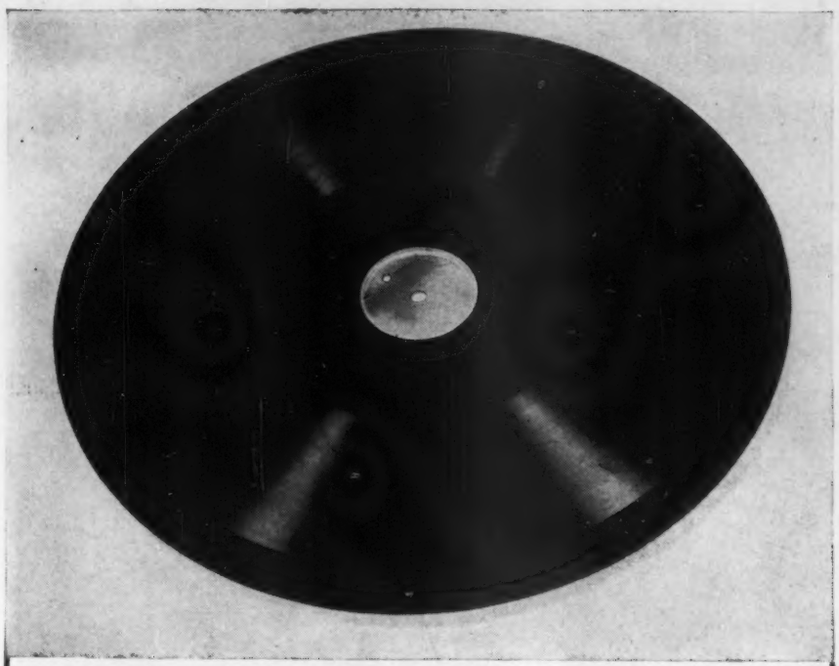

GLASS MASTER DISCS
NOW READY FOR DELIVERY

Presto 17¼" Glass Base Master discs are now in stock awaiting your order. Transcription manufacturers have been processing samples of the Presto Glass Master for several months and report it perfect in every respect, easily adapted to their plating equipment, thick enough (.135") for safe handling and having the exceptionally quiet surface characteristic of all Presto discs.

The Presto 17¼" Master is made in two styles. Type 917-D has a removable metal center insert to allow its use with overhead cutting mechanisms driven from the center of the turntable. The 917-E has a solid insert for tables having independent cutting head drive (Presto 8-C).

Priced only slightly higher than previous aluminum master discs. Sold by Graybar Electric Company and leading radio parts distributors throughout the United States and Canada.

PRESTO
RECORDING CORP.
242 WEST 55th ST. N.Y.

In Other Cities, Phone ... ATLANTA, Jack. 4372 • BOSTON, Bel. 4510 CHICAGO, Har. 4240 • CLEVELAND, Me. 1565 • DALLAS, 37093 • DENVER, Ch. 4277 • DETROIT, Univ. 1-0180 • HOLLYWOOD, Hil. 9133 • KANSAS CITY, Vic. 4631 • MINNEAPOLIS, Atlantic 4216 • MONTREAL, Wel. 4218 PHILADELPHIA, Penny. 0542 • ROCHESTER, Cul. 5548 • SAN FRANCISCO, Yu. 0231 • SEATTLE, Sen. 2560 • WASHINGTON, D.C., Shep. 4003

World's Largest Manufacturers of Instantaneous Sound Recording Equipment and Discs

voltages shifted 90 electrical degrees. Simplified electronic differentiating circuits are described by Otto H. Schmitt and Walter E. Tolles in an article entitled "Electronic Differentiation" in the March 1942 issue of *The Review of Scientific Instruments.*

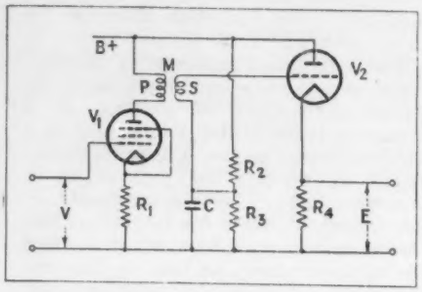

Fig. 1—Mutual inductance differentiator

Two general methods have been employed. The first uses a coupled circuit, as shown in Fig. 1. The voltage induced in the secondary of a pure mutual inductance varies in direct proportion to the time rate of change of current in the primary.

$$V_s = M \frac{dI_p}{dt},$$

where V_s is the secondary induced e.m.f., M is the mutual inductance and I_p is the primary current.

The second uses a series circuit of a condenser and resistor, as shown in Fig. 2. The current through the condenser varies directly with the time rate of change of potential across the condenser.

$$I = \frac{dq}{dt} = C \frac{dv}{dt}$$

where I is the current through the condenser, q is the charge on the condenser, V is the potential difference across the condenser plates and C is the capacitance of the condenser.

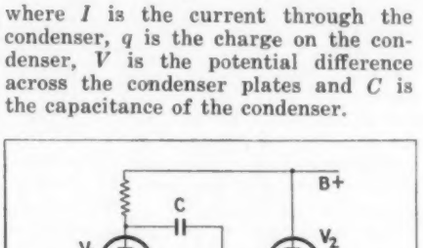

Fig. 2—RC differentiator

For applications of the first method, it is necessary that the current through the primary be directly proportional to the instantaneous value of the impressed voltage. This requires a large resistance in series with the primary, which may be accomplished by the use of a pentode with high dynamic plate resistance. The linearity of the pentode circuit is improved by using an unbypassed biasing resistor R_1.

The second, or condenser method, is the simpler of the two, and is applicable where a large but not extreme range of frequencies has to be handled by the circuit. The form of differentiator

relies upon a condenser C to provide a current proportional to the time rate of change of signal voltage V. The potential drop across R, connected in series with the condenser, is proportional to the current and hence proportional to the time derivative of the input voltage. The above statements are made with the assumption that the impressed potential is unaffected by the differentiator circuit. This requires that the input circuit have a low internal impedance as compared to that of R and C. They further assume that the resistance is much less than the capacitive reactance at all working frequencies. The first condition can be met by supplying the differentiator from a circuit of reasonably low impedance, such as a low resistance radio tube plate circuit; the second, by choosing suitable values of R and C. The authors recommend a value of R equal to the dynamic plate resistance of the vacuum tube and a value of C such that the voltage drop across R shall never exceed 1/30 of the impressed voltage.

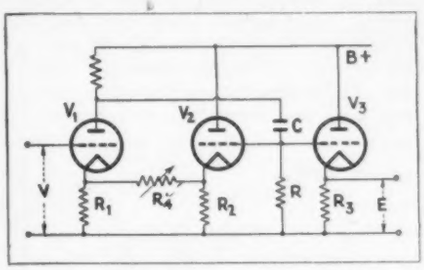

Fig. 3. Feedback type differentiator

The largest error, which is due to neglecting the voltage drop across the differentiating resistor, can be eliminated if a voltage equal to it, but in phase opposition is fed back into the differentiator circuit. This feed-back can be accomplished with a circuit shown in Fig. 3.

• • •

The Relaxation Amplifier

THE WELL KNOWN CIRCUIT of the relaxation oscillator is incorporated in the form of a pulse relay called a relaxation amplifier. It is described in an article by Dr. Martin Wald in *The Wireless Engineer* of December, 1941.

By the addition of a diode rectifier to the two tube relaxation oscillator of Abraham and Block, an interesting circuit results, called a relaxation amplifier by the author. The diode is inserted between the output and input, (see Fig. 1.) thus the feedback current can pass only in one direction and no oscillation will occur. Should any small voltage impulse be impressed on the input with the grid positive, relaxation oscillation will be produced. These oscillations, however, will be interrupted as soon as the current through the diode rectifier tends to change its direction, that is after a half cycle.

For maximum sensitivity and stable operation, the feed-back through the diode capacity is neutralized by means of the condenser C_x. The operating

STANCOR

Professional Series

COMPONENTS

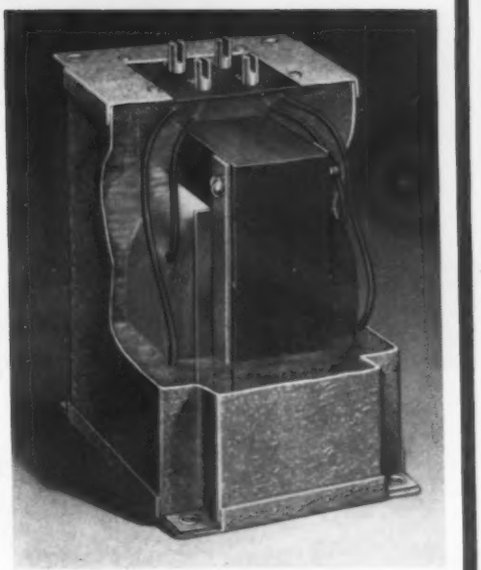

★

Ruggedly Constructed and Adaptable to Your Exacting Government Specifications

THE STANCOR PROFESSIONAL SERIES TRANSFORMERS are unique and conservatively designed to meet the most exacting needs. May be mounted with terminals either above or below mounting surface. When sub-panel mounting is used, cabled wiring is easy, providing quick assembly, wiring and testing. All are tropic impregnated, then potted in moisture-resistant compound for trouble-free service.

The extreme flexibility of these STANCOR Transformers makes them highly desirable for use in production runs of communication equipment, amplifiers and many other electronic devices.

SEND IN FULL DATA ON YOUR TRANSFORMER PROBLEMS FOR PROMPT QUOTATIONS

STANCOR

STANDARD TRANSFORMER

• CORPORATION •

1500 NORTH HALSTED STREET . . . CHICAGO

RACKS · CHASSIS · PAR-METAL · CABINETS · PANELS

Shown here, Cabinet Rack #R6618. Typical of a complete line listed in our Catalog No. 41.

A "De Luxe" job, typical of Par-Metal quality, this rack is in use on many commercial transmitters.

STANDARD AND CUSTOM-BUILT RACKS & CABINETS

Engineers who expect style, skill, and precision in metal work as a matter of course, will find that PAR-METAL thinks along this line.

And we are equipped for volume business. So why not consult us when bidding on defense orders. Estimates submitted promptly.

For your guidance, write for our Catalog No. 41

PAR-METAL PRODUCTS CORP.
32-62 49th ST., LONG ISLAND CITY, N. Y.
Export Dept.: 100 Varick St., New York, N. Y.

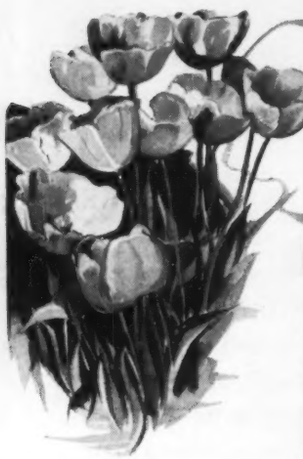

from BLACK Soil

COME LOVELY FLOWERS

And so it is that from the darkness of the present hour will emerge a brighter day when the brain and brawn of modern industry will be utilized in furthering peacetime products and pursuits. While serving the government today we are broadening both creative and manufacturing possibilities for a happier world of tomorrow. Astatic Engineering services are available to work in cooperation with electronic engineers in the development of new war-time equipment especially as it may have to do with the pickup and transmission of sound. Astatic Microphones, Pickups, Cartridges and Recording Heads, while limited in production, are still available for replacement use.

SEE YOUR RADIO PARTS JOBBER

ASTATIC

THE ASTATIC CORPORATION

YOUNGSTOWN, OHIO

Licensed Under Brush Development Co. Patents

In Canada: Canadian Astatic Ltd. Toronto, Ontario

point of the amplifier is determined by the setting of the negative bias voltage E_B.

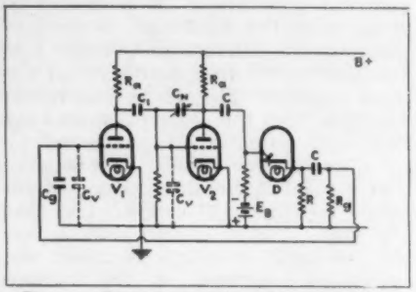

Fig. 1. Circuit of relaxation amplifier

If a sine wave with a frequency greater than that of the relaxation oscillations is impressed on the input of this amplifier, the output frequency will then be independent of the impressed frequency. Thus an unmodulated radio frequency signal on the input would be directly converted to an audio frequency. The author claims that the circuit operates well as a simplified telegraphic receiver, with a strong a.v.c. effect. As long as the input signal is smaller than the operation threshold of the relaxation amplifier, no sound frequency will be heard.

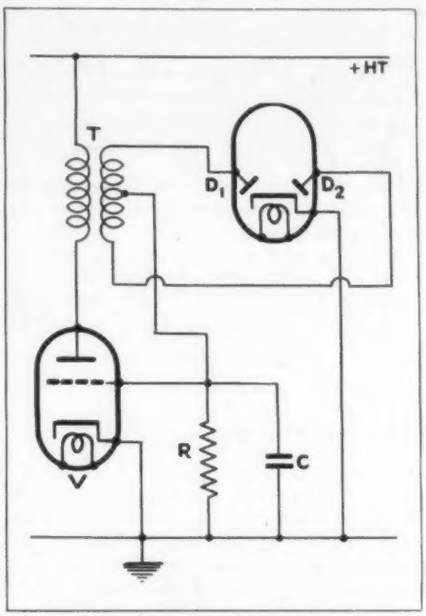

Fig. 2. Relaxation amplifier with transformer

For any signal amplitude exceeding the threshold value, the relaxation oscillation will produce an audio signal.

Another possible type of relaxation amplifier is shown in Fig. 2. Here the phase inversion is accomplished by means of the transformer T. The two ends of the secondary are connected to the duo-diode, and the mid-tap to the grid. Any negative impulse impressed on the grid will start a relaxation oscillation of large amplitude, increasing the negative grid potential until the tube blocks. After the condenser C discharges through the resistance R the system remains in balance until a new impulse occurs.

How to save time by doing more reading

That is a profitable paradox for you. More true today than perhaps ever before. For here in the pages of this publication are packed many helpful ideas . . . considerable useful information. Much of it, in fact, available from no other source.

And we most emphatically mean to include the advertising pages, as well as the editorial pages.

Just one new idea gleaned from these pages . . . a method for doing something better or faster or easier or at lower cost, may alone save you far more than a year's reading-hours invested in this and other worthwhile business papers.

Many people have found this a fact . . . not only once, but time and time again. That's significant . . . with time so precious today.

Good advertising speeds information from those who have it . . . to those who need it.

McGraw-Hill Publishing Company, Inc.
330 West 42nd Street New York

This Free Booklet May Help You Now

There are 23 McGraw-Hill Publications covering many branches of Business and Industry;—mining, metal-working, transportation, manufacturing, engineering design and heavy construction. Over a million readers are finding them constantly helpful in carrying out today's vital work in the army of production. Perhaps one of them would prove interesting and helpful to you. A 24-page illustrated booklet, describing each one in some detail, will be sent FREE, on request . . . this booklet has been prepared to help you select the paper which will serve you best. Just fill in and mail the coupon below.

McGRAW-HILL PUBLISHING CO., INC.
330 West 42nd St., New York, N. Y.

Gentlemen:
I would like to have your free booklet describing McGraw-Hill Publications.

Name .....

Company .....

Address .....

Our business is .....

New Books

Handbook of Chemistry and Physics

CHARLES D. HODGMAN, *Associate Professor of Physics, Case School of Applied Science, Editor in Chief and* HARRY N. HOLMES, *Professor of Chemistry, Oberlin College, Associate Editor. Chemical Rubber Publishing Co., Cleveland, 1941–2, 25th edition, 2503 pages. Price $3.50.*

ALMOST EVERY YEAR for many years this useful compendium of information had been revised, added to, and in general brought up to date with new research. This edition is no exception. Considerably more than half of the pages in the book have been added or completely revised and reset. These changes include such data as Physical Constants of Inorganic, Organic and Industrial Organic Compounds, Melting and Boiling Points of Organic Compounds, Description of the Elements, Properties of Commercial Plastics, X-Ray Crystallographic Data, Gravimetric Factors and their Logarithms, Definitions of Chemical Terms, Composition and Value of Foods, and many other important tables.

The format of the book also has been changed, making it longer and wider and, as a result, more convenient to use. —K.H.

Introduction to Modern Physics

By F. K. RICHTMYER and E. H. KENNARD *(Third Edition. 723 pages. McGraw-Hill Book Co. Price $5. 1942.)*

THIS WELL-KNOWN VOLUME was originally based on a course of summer lectures given at Cornell University by the late Professor Richtmyer. The first two editions of this book have enjoyed considerable popularity among upper class or graduate students in physics and engineering. After the sudden death of Professor Richtmyer, preparation of the third edition was undertaken by Professor Kennard, whose text on "Kinetic Theory of Gases", which has been reviewed in these columns, is a fitting companion for the present work.

The delightful introduction of the first two editions has been retained in the present edition in the historical sketch which outlines the advancement of physics from the earliest times to the development of the theory of electro-magnetism by Maxwell, Lorentz, Hertz and others. In the reviewer's opinion, the historical sketch given in the first chapter would be well worth reading by anyone having even a cursory interest in the physical sciences.

Once the 50 pages of Chapter I are behind the reader, it is evident that the volume is no mere high school textbook. The second chapter deals with electromagnetic waves and moving charges and rapidly brings the reader to the differential expression for Maxwell's equations. Subsequent chapters deal with the following subjects: The photoelectric and thermionic effects, theory of relativity, origin of a quantum theory, the nuclear atom and origin of spectral line, wave mechanics, atomic structures and optical spectra, the quantum theory of specific heats, x-rays, the nucleus, and cosmic rays. All of the topics will be of interest to the physicist or engineer with catholic interests.

To readers of ELECTRONICS, Chapter III dealing with the photoelectric and thermionic effects is likely to be of the most immediate and practical interest. The section dealing with the discovery of the photoelectric effects and the discovery of the electron, an appreciable amount of historical material is interspersed with the necessary scientific implications of the discovery. Again, in describing the Zeeman effect on page 87, the historical experimental researches of Faraday are mentioned and the reasons for his failure are given as are also the reasons for Zeeman's success. The subject of photoelectricity is treated briefly and succinctly under the following topics: Photoelectrons, relation between photoelectric current and intensity of illumination of the cathode, energy distribution of photoelectrons, relation between velocity of photoelectrons and frequency of the light, properties of photoelectric emission, source of the photoelectric energy, and the photoelectric section and the corpuscular theory of light. The modern point of view is apparent in the treatment of thermionic emission under the topics:

The "Radio" Handbook

Published by Editors and Engineers, Ltd., 1300 Kenwood Road, Santa Barbara, Calif. 640 pages. Price, $1.75 in clothbound edition.

THE RADIO HANDBOOK gives a general compilation of information on the practical aspects of radio. The contents is divided into three classifications: (1) principles of electricity, radio, vacuum tubes and antennas, (2) constructional information on the building of high frequency transmitters and receivers and (3) tube characteristic tables, reference charts and graphs, and a collection of formulas useful to the practical radio man.

The fundamentals of radio are given in a descriptive manner with little use of mathematics. The treatment is such as to be suitable for high school students, although the constructional material contains important information to any who may desire an introduction into high frequency technique and methods. Throughout emphasis has been placed on the practical aspects of the communication problem.—B.D.

MAKE YOUR OWN SAFETY GLASS

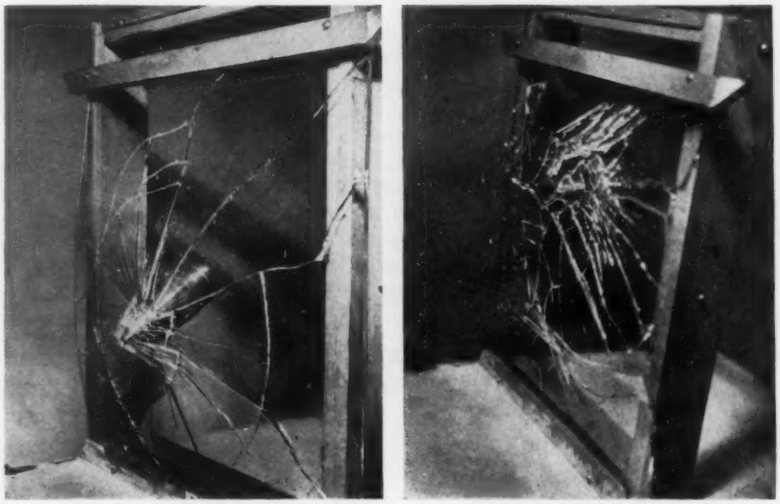

Roxaneal, a new glass protector, is a water-white transparent liquid that prevents broken glass from flying. It will not stop glass from fracturing but tests have proved that it will keep broken glass in place thus preventing dangerous glass splinters from flying. Photographs of the test were made at one millionth of a second. Left, shows the coated glass, right, is the plain glass

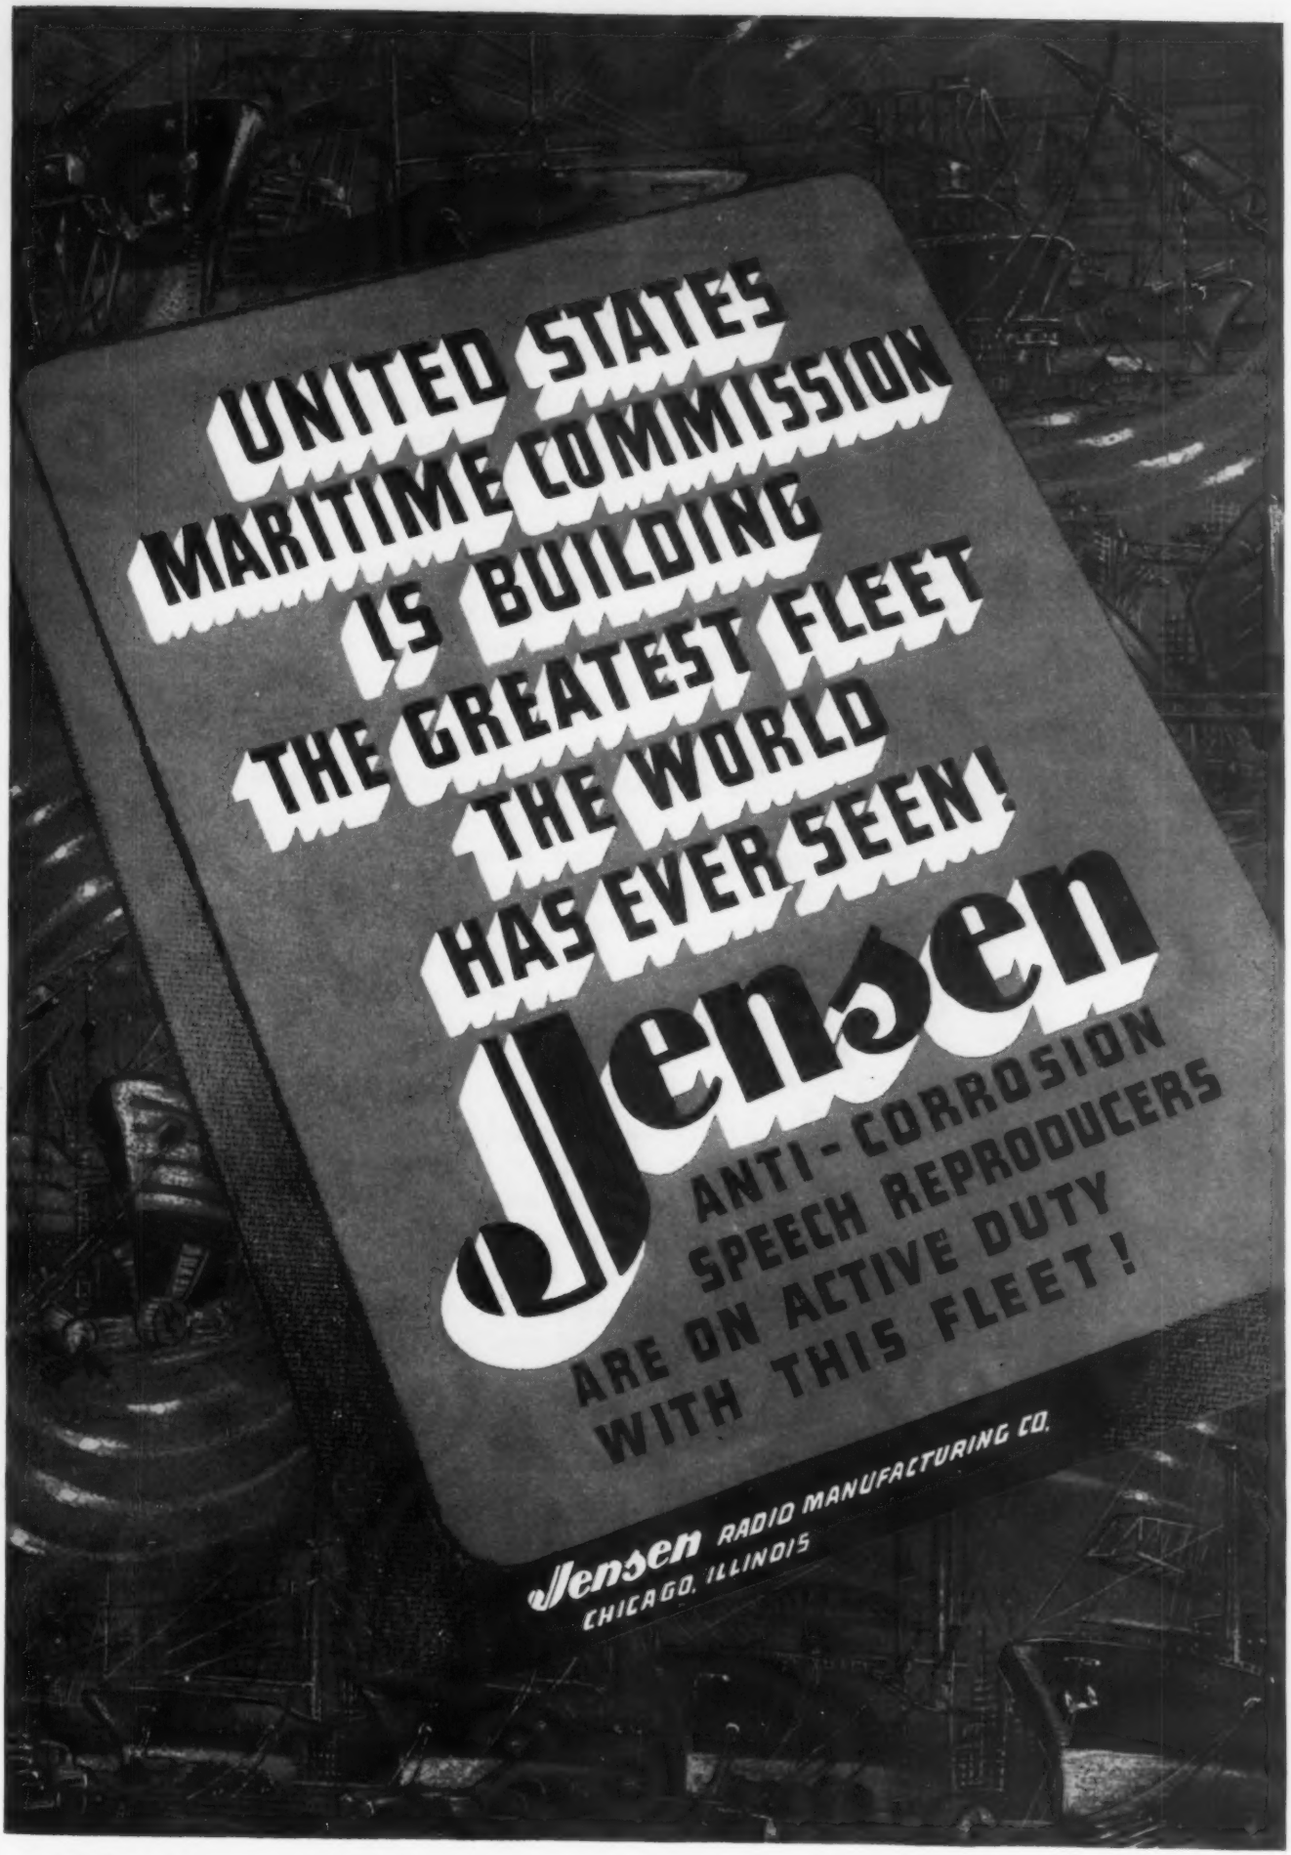
UNITED STATES
MARITIME COMMISSION
IS BUILDING
THE GREATEST FLEET
THE WORLD
HAS EVER SEEN!
Jensen
ANTI-CORROSION
SPEECH REPRODUCERS
ARE ON ACTIVE DUTY
WITH THIS FLEET!
Jensen RADIO MANUFACTURING CO.
CHICAGO, ILLINOIS

MAILING LISTS THAT WORK . . .

McGraw-Hill Industrial Mailing Lists are a direct route to today's purchase-controlling executives and technicians in practically every major industry.

These names are of particular value now when most manufacturers are experiencing constantly increasing difficulty in maintaining their own lists.

Probably no other organization is as well equipped as McGraw-Hill to solve the complicated problem of list maintenance during this period of unparalleled changes in industrial personnel. These lists are compiled from exclusive sources, based on hundreds of thousands of mail questionnaires and the reports of a nation-wide field staff, and are maintained on a twenty-four hour basis.

Investigate their tremendous possibilities in relation to your own product or service. Your specifications are our guide in recommending the particular McGraw-Hill lists that best cover your market. When planning your industrial advertising and sales promotional activities, ask for more facts or, better still, write today. No obligation, of course.

McGraw-Hill Publishing Co., Inc.
DIRECT MAIL DIVISION
330 West 42nd Street New York, N. Y.

thermionic emission, relation between thermionic and photoelectric constants, velocity of emission of thermions, theory of electron metals, origin of photoelectrons and thermions. While the classical work of O. W. Richardson is adequately recorded, there is no mention of Richardson's original derivation of the emission equation based on a theory of gases, although the reader is referred to Richardson's subsequent publication for the derivation of the emission equation.—B.D.

The Radio Amateurs' Handbook

Published by American Radio Relay League, West Hartford, Conn. Price $1.00. 288 pages.

"THE SPECIAL DEFENSE EDITION" of the well known Radio Amateur's Handbook is intended for use in radio training courses. It differs from the usual handbook reviewed in the February issue, mainly in that those chapters dealing with the discussion of amateur equipment and the operation of amateur stations has been omitted, while new chapters have been added on mathematics, measuring equipment and learning the code.

The text is suitable for high school students or graduates, is largely descriptive rather than mathematical and is written from the practical rather than the theoretical point of view. —B.D.

Elementary Mathematics for Engineers

SIR AMBROSE FLEMING. *Chemical Publishing Co., Brooklyn, N. Y., First American Edition 1941. 110 pages. Price $2.00*

FLEMING'S LITTLE BOOK (originally published in England) has as its object to "include in one small and portable book just the practical information on various branches of mathematics which are of importance in engineering." It is not a book of mathematics for mathematics' sake, but of the use of math as a tool.

Chapter headings are algebra, plane trigonometry, plane co-ordinate geometry, vector algebra, differential calculus, integral calculus, differential equations, harmonic analysis and hyperbolic trigonometry. Fortunately the language of mathematics is fairly universal so that this English book does not suffer the fault of many others of using terminology unfamiliar to an American reader.

Often these condensed versions of mathematics (or of any other subject) are so condensed that reading presents some difficulties but in general it is a useful book doing just what was planned.—K.H.

Electrical Illumination

By JOHN O. KRAEHENBUEHL, *Professor of Electrical Engineering, University of Illinois, (441 pages. Illustrated. Price $3.75. John Wiley & Sons.)*

ACCORDING TO THE AUTHOR, this book is intended to expound "the principles underlying specifications and design of electrical light for commercial and industrial buildings." Attention is given to the physiological and psychological aspects of lighting and illumination as well as the objective and subjective specifications of illumination. A chapter of 20 pages on color and shadow deals largely with the subjective aspects of lighting. Distribution curves and point-by-point methods of determining illumination are discussed in the fifth chapter. In the chapter dealing with incandescent and gaseous light sources, approximately 13 pages are devoted to incandescent lamps and 16 pages to gaseous conduction lamps, thereby reflecting the recent rapid advancement which has been made in electrical illumination by methods other than incandescent.

By far the largest part of this volume deals with the reflection, transmission and absorption of materials used for the control of lighting and illumination. Likewise, a considerable amount of space is given to various types of luminaires, and methods of installations which will be particularly of interest to the architect. The book is studded with line diagrams which provide helpful hints to the architect or designer by showing methods of utilizing illuminating systems. It is largely nonmathematical and is written for the level of college sophomores in both engineering and fine and applied arts divisions.—B.D.

Vacuum Tube Voltmeters

By JOHN F. RIDER, *Published by John F. Rider Publisher, Inc., 404 Fourth Ave., New York, 1941, 180 pages. Price $1.50.*

The Meter at Work

By JOHN F. RIDER, *New York, 1940, 152 pages. Price $1.25.*

THESE TWO SMALL VOLUMES are useful additions to any practicing engineer's reference library. They are well written, and the subjects are covered in a practical rather than theoretical manner. The information is specifically designed to be useful to engineers, students, and servicemen.

As the title implies, "Vacuum Tube Voltmeters" deals with potential measuring devices that employ vacuum tubes. The fundamental ideas of the subject are explained, and then how they are used in diode, triode, slide-back, rectifier-amplifier, tuned, audio-frequency, and logarithmic types of vacuum tube voltmeters. There is a section on v-t voltmeters for measur-

If your design problem can be simplified and the finished product improved by the use of

PRECISION METAL SHIELDED WIRE

here is data that will speed your work . . . A complete but condensed bulletin with the facts and figures that will assure accuracy of estimates and calculations . . . The mechanical, physical and electrical characteristics of this Static-proof, Moisture-proof wire armored with *Seamless* Copper or Aluminum Tubing are correctly tabulated for ready reference.

Upon request Bulletin E will be sent you by return mail together with testing samples of Precision Metal Shielded Wire in several forms. Write us today.

PRECISION TUBE CO.

Specialists in accurately drawn tubing of every description

3824-26-28 TERRACE STREET
PHILADELPHIA, PA.

Branches in all Principal Cities

M&W

CEMENTS
ENAMELS
LACQUERS

M&W Cements, Enamels, and Lacquers, specially developed for radio use, have been supplied to the Radio Industry ever since its earliest days.

In addition to the standard radio cements, enamels, and lacquers listed below, Maas and Waldstein Company supplies special materials formulated after a study of manufacturing conditions.

LOUDSPEAKER CEMENTS—A complete line having drying and film characteristics to meet every requirement of loudspeaker fabrication.

THERMOPLASTIC CEMENTS—For all hot pressing operations.

COIL ENAMELS—High dielectric strength; resistant to moisture; good coverage; for machine or hand dipping.

RESISTOR ENAMELS—Heat resisting; adhere to porcelain; in many colors for identifying resistors of various capacities.

CONDENSER ENAMELS—Adhere to greasy surfaces.

TUBE SHIELD LACQUERS—For tinned and aluminum shields; special heat-dissipating lacquers.

CONE LACQUERS—Clear or slightly pigmented; available in three standards of flexibility; moisture resistant.

METAL LACQUERS—Clear and decorative.

BRONZING LIQUIDS—For use with bronze powders in covering metal parts.

CABINET FINISHES—Materials and complete schedules for finishing metal and wood cabinets.

INSULATING LACQUERS—For use on inside of I. F. cans; adequate insulating properties.

Radio engineers, interested in securing the best results at lowest unit cost, are invited to avail themselves of M & W's advisory service.

MAAS AND WALDSTEIN CO.
Chicago NEWARK Los Angeles
PIONEERS IN PROTECTION

ing d-c voltage, current, and resistance. The design, construction, calibration, testing, and applications of v-t voltmeters is also discussed. A valuable bibliography on the subject appears at the end of the book.

"The Meter at Work" covers measuring instruments in general. Such topics as moving-iron meters, moving-coil meters, electrodynamometer and electrostatic meters, and thermal meters are treated in some detail with an eye to principles of operation and construction. The components, characteristics, and applications of these instruments are discussed. A chapter on the characteristics of rectifiers and thermocouples is also included.

An interesting feature of this latter book is its unusual construction. The publisher has separated the text from the illustrations and diagrams so that the reader is able to thumb through the text and have the diagram referred to before him all the time. This is accomplished by binding the diagrams and illustrations in the upper portion of the book, and the text in the lower portion with a small space separating the two sections. Thus in effect you have two small books bound in the same cover. In this manner repetition of diagrams is avoided and the reader is able to cover all phases of the subject he is interested in without having to turn back pages to refer to a particular diagram. The idea is good except that in turning the pages of the lower section you tend to have

• • •

WATER LOCATOR

This apparatus which is installed in a truck is driven to the location and small portable seismographs are set up on the ground. A small blast of dynamite is then discharged and the photographic recorders make a photo record of the rebound and passage of waves through the earth. The speed of these waves indicates the glacial deposits, formation of bed rock, kind of rock, amount of water under the ground and the distance down to the water. Rev. Daniel J. Linehan, S. J. is shown working on a group of the small seismographs which are used under water to pick up the waves of a blast

Type CE 11

CETRON
ELECTRONIC TUBES
•
PHOTOTUBES
over 70 types
•
RECTIFIERS
Mercury Vapor & Gas types
up to 30 amperes

SPECIAL TUBES
Grid Control, Printing Lamps, and many others
Complete information sent on request

CONTINENTAL ELECTRIC CO.
710 HAMILTON AVE.
GENEVA, ILLINOIS

*Micro-Dimensional
WIRE & RIBBON
for
VACUUM TUBES

In a complete range of sizes and alloys for Transmitting, Receiving, Battery and Hearing-Aid Tubes . . .

Melted and worked under close supervision to assure maximum uniformity and tensile strength . . .

*WIRES drawn to .0005" diam.
*RIBBON rolled to .0001" thick

SPECIAL ALLOYS made to meet individual specifications . . .

Write for list of stock alloys
SIGMUND COHN
44 GOLD ST. NEW YORK
SINCE 1901

the pages of the upper section turn also. This difficulty might be solved by binding the book with a spiral type of binding which would permit the diagrams in the upper section to lie flat as the pages of the text section were turned.—E.E.G.

Geophysics in War

C. A. HEILAND, *Professor of Geophysics, Colorado School of Mines. 85 pages, Vol. 37, No. 1 January 1942, Colorado School of Mines Quarterly. Price $1.00. Photographs, diagrams and charts.*

A TIMELY PUBLICATION discussing the application of the principles of geophysics to military operations and the application of the same principles to the location of mineral resources including water supply. Under military applications, the principles of geophysics may be applied to the location of the enemy's position, to remote control demolition, foundation tests of fortifications, location of wrecks and practice weapons, weather forecasting, road location, etc. Each of these applications is described, and the differences in use for under land or under water, or in the air are pointed out. Thus such matters as submarine or aircraft detection and location are described.

The second portion of the book is devoted to the more prosaic uses of geophysics in the location of water sources, prospecting for oil and for strategic and critical materials. Finally there is a brief summary of what geophysics has to offer for the post war period.—K.H.

• • •

LIFE SAVING DEVICE

Every British seaman will be equipped with a lapel torch. This red bulb is clipped to the shoulder of the men and shows clearly from the water. It has already been credited with saving the lives of more than four hundred men

NOW
IN OFFENSE
AS IN DEFENSE
IT'S G-M RELAYS

If your uninterrupted production depends on quality Relays, request details on the following G-M relays, which can be supplied in volume quantities, and quickly:

TYPE "J"; small, low-weight, D.C. aircraft relay; 2" long, 1⅞" high; heavy contact pressure; for high acceleration, altitude, vibration and humidity specifications, 2 or 3 poles; self cleaning wiping contacts.

TYPE "C"; small, 2⅛" long, 2½" high; 1, 2, 3 or 4 poles; self cleaning wiping contacts, A.C. or D.C.

TYPE "F"; small, 2½" long, 1⅛" wide; 1, 2, 3 or 4 poles; self cleaning wiping contacts; heavy contact pressure; A.C. or D.C.

For Full Data on these or other Relays Write or Wire.

G-M LABORATORIES INC.

4313 North Knox Avenue — Chicago, U. S. A.

A SELF-LOCKING NUT for every IMPORTANT FASTENING

STANDARD-HEIGHT HEX NUTS
For all classes of bolted fastenings

ANCHOR NUTS
For riveting to structures

THIN HEX NUTS
For shear bolts with light tensile load



INSTRUMENT-MOUNTING NUTS
For control panels

TEST ELASTIC STOP NUTS on *your* products and equipment. Sample nuts will be furnished without cost or obligation.

ELASTIC STOP NUTS are made in more than 2500 combinations of type, size, material, finish, and thread system . . . to provide safe and economical bolted fastenings for any mechanical or electrical application.

Each nut embodies the Elastic Stop resilient non-metallic self-locking collar that assures a tight hold under all conditions of vibration, shock, and prolonged hard service.

» *Catalog on request*

ELASTIC STOP NUT CORPORATION • 2371 VAUXHALL ROAD • UNION, NEW JERSEY

Elastic Stop SELF-LOCKING NUTS

OUR SERVICE NOW IS FOR DEFENSE —

COMPLETE UNIT PRODUCTION—QUALITY CRAFTSMANSHIP

ELECTRICAL DIVISION—

Products Engineering
on any Electronic Device—

Quality Amplifiers—

Communications System Components—

Conversion of Laboratory Models
into Commercial Production—

SHEET METAL DIVISION—

Metal Chassis and Cabinet Fabrication—

Stamping—Forming—Welding—Finishing

Equipment and Wiring for Communications Companies

LET US COOPERATE WITH YOU

SHERRON METALLIC CORPORATION
1201 FLUSHING AVENUE BROOKLYN, NEW YORK

STABILIZED A. C. VOLTAGE

UP TO 25 KVA

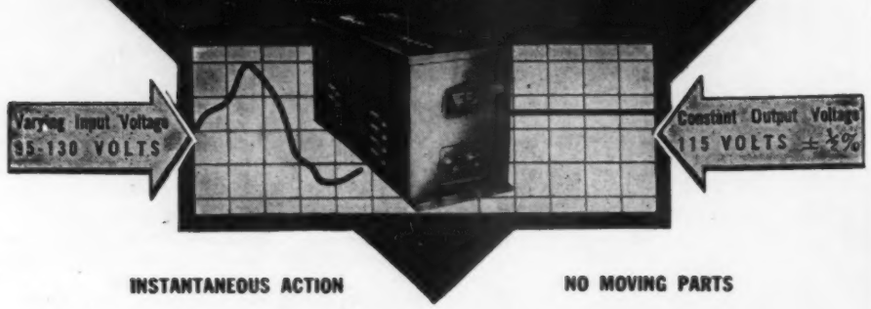

INSTANTANEOUS ACTION NO MOVING PARTS

When a precision electrical device or a critical process is powered from an AC line, a Raytheon Voltage Stabilizer will permanently eliminate all of the detrimental effects caused by AC line voltage fluctuations. Made for all commercial voltages and frequencies, single or three phase.

Raytheon's twelve years of experience in successfully applying the Stabilizer to hundreds of perplexing voltage fluctuation problems is at your service. It will pay you to take advantage of our engineering skill.

Write for Bulletin DL48-71 JE describing Raytheon Stabilizers.

RAYTHEON MANUFACTURING CO.
100 Willow Street, WALTHAM, Massachusetts

Program of the Summer Convention Institute of Radio Engineers

June 29, 30, and July 1
Statler Hotel
Cleveland, O.

MONDAY, JUNE 29

10:30 A. M.—1:00 P. M.

Addresses of welcome by A. F. Van Dyck, P. L. Hoover, and Carl E. Smith.

"Recording Standards" by I. P. Rodman Columbia Recording Corp.

"A New Approach to the Problem of Phonograph Reproduction" by G. L. Beers and C. M. Sinnett, RCA Mfg. Co.

"Measuring Transcription Turntable Variations" by H. E. Roys, RCA Mfg. Co.

"A New Type of Practical Distortion Meter" by J. E. Hayes, Canadian Broadcasting Corp.

"Frequency Modulation Distortion in Loud Speakers" by G. L. Beers and H. Belar, RCA Mfg. Co.

2:30 P. M.—5:00 P. M.

"Radio Frequency Oscillator Apparatus and Its Application to Industrial Process-Control, Equipment" by T. A. Cohen, Wheelco Instrument Co.

"The Scanning Microscope" by V. K. Zworykin, J. Hillier, and R. Snyder, RCA Mfg. Co.

"Spectroscopic Analysis in the Manufacture of Radio Tubes" by S. L. Parsons, Hygrade Sylvania Corp.

"Minimizing Aberrations of Electron Lenses" by H. Poritzky, General Electric Co.

• • •

LETTER ON A RECORD

At the USO club for servicemen in Norfolk, Va., service men record their letters on this recording-reproducing machine and mail the records home to the folks. These machines are being installed in USO clubs operated by the NCCS

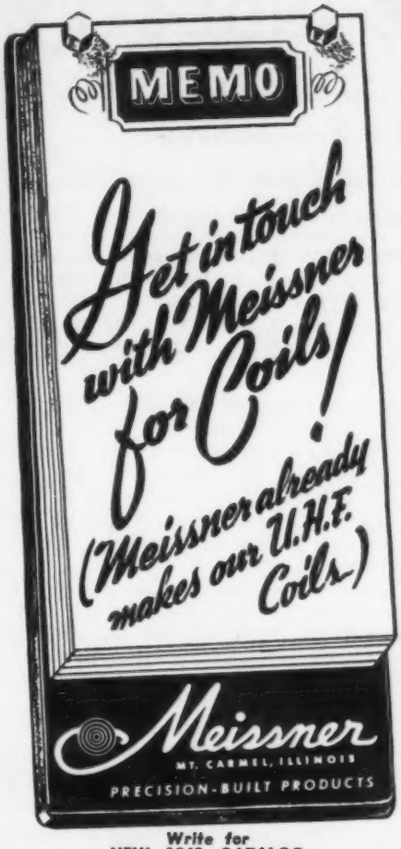

Write for
NEW 1942 CATALOG
Address—Dept. E-6

JONES 500 SERIES PLUGS and SOCKETS

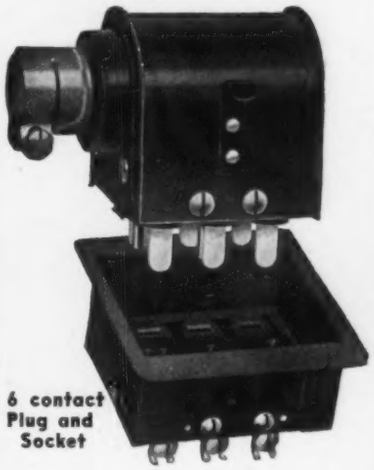

6 contact Plug and Socket

5000 volts and 25 amperes. Fulfills every electrical and mechanical requirement. Polarized to prevent incorrect connections. Easy to wire. Sizes: 2, 4, 6, 8, 10 and 12 contacts. Thousands of uses. Write for Bulletin 500 today.

HOWARD B. JONES
2300 WABANSIA AVENUE,
CHICAGO ILLINOIS

TUESDAY, JUNE 30

10:00 A. M.—1:00 P. M.

"Maintenance of Broadcasting Operations During Wartime" by J. A. Ouiment, Canadian Broadcasting Corp.

"High Power Television Transmitter" by H. B. Fancher, General Electric Co.

"F-M Transmitter-Receiver for ST Relay" by W. F. Goetter, General Electric Co.

"Effect of Solar Activity on Radio Communication" by H. W. Wells, Carnegie Institution of Washington.

2:30 P. M.—4:30 P. M.

"Television Video Relay Systems" by J. B. Keister, General Electric Co.

"Mercury Lighting for Television Studios" by C. A. Breeding, General Electric Co.

"The Focusing View Finder in Television Cameras" by G. L. Beers, RCA Mfg. Co.

"Automatic Frequency and Phase Control of Synchronization in Television Receivers" by K. R. Wendt and H. L. Fredenhall, RCA Mfg. Co.

WEDNESDAY, JULY 1

10:00 A. M.—1:00 P. M.

"Radio Strain Insulators for High Voltage and Low Capacitance" by A. O. Austin, A. O. Austin Co.

"Improved Insulators for Self-Supporting or Sectionalized Towers" by A. O. Austin, A. O. Austin Co.

"Brief Discussion of the Design of a 900 Foot Uniform Cross Section Guyed Radio Tower" by A. C. Waller, Truscon Steel Co.

"Circular Antenna" by M. W. Scheldorf, General Electric Co.

"Stub Feeder Calculations" by H. A. Brown and W. J. Trijitzinsky, University of Illinois.

• • •

SPEED CONTROL FOR AUTOS

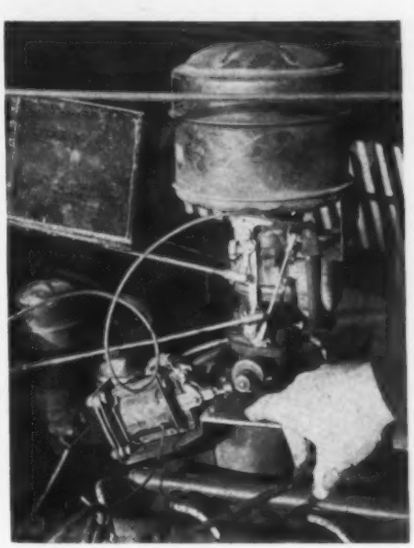

This radio-receiver device is attached to the motor of the automobile. Regardless of the pressure on the accelerator, it is so designed as to cut down the speed of autos approaching intersections

SIGMA

Midget Sensitive Relay

SIGMA TYPE 4F

IDEAL FOR AIRCRAFT APPLICATIONS.

- Withstands severe vibration
- Not affected by ambient temperature from —40°C to +90°C
- High resistance to humidity
- Exceptionally small size, weight 2 ounces
- Contacts handle high loads
- Coil resistance up to 10,000 Ω
- Operating on one milliwatt or less

Available on high priority. Write stating circuit characteristics and delivery requirements.

OTHER SIGMA PRODUCTS

Plug-in sensitive relays
Microswitch relays
"Zero center" differential polarized relays
Midget rectifiers

SIGMA INSTRUMENTS, INC.
78 Freeport St.
DORCHESTER (Boston) MASS.

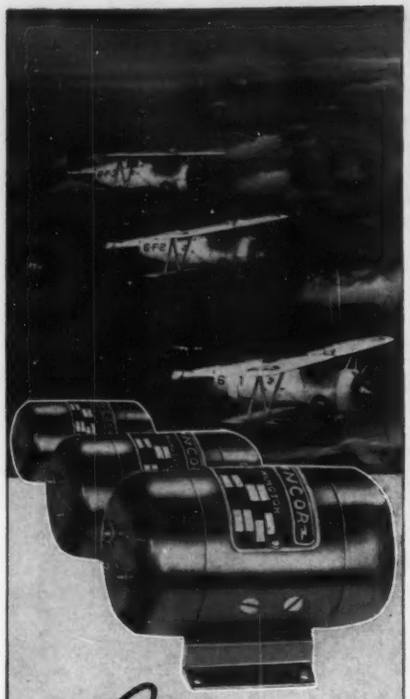
PINCOR
Products are
AT THE FRONT
Being "At The Front" has a different meaning in war than in peace. But to achieve both distinctions requires the "tops" in dependability, economy, and versatility. In the estimation of Military and Civilian experts, PINCOR Products have through the years, first in peace and now in war, proven that their just position is "At The Front"
ROTARY CONVERTERS
SMALL MOTORS
POWER PLANTS
HIGH FREQUENCY EQUIPMENT
PIONEER GEN-E-MOTOR
CHICAGO, ILLINOIS
Export Address: 25 Warren Street, N. Y., N. Y.
Cable: SIMONTRICE, New York

NEWS OF THE INDUSTRY

Supply of shellac for phonograph records sharply reduced. New demands for technical people continue to be made; even young women of scientific interest have opportunity to serve Signal Corps

News

ON APRIL 14, War Production Board limited the amount of shellac available to phonograph and transcription record manufacturers to 30 percent of 1941 consumption. The effect of this restriction upon production of records depends upon the ability of the manufacturers to use other less strategic materials or to use less shellac per record. Already, May 7, in New York records were moving out of dealers hands much faster than they were moving in.

April ruling by WPB that no new projects costing more than $5000 and requiring use of critical materials could be started without permission means that new broadcasting stations are practically impossible.

Emerson Radio and Phonograph Corp., New York City, has announced a complete line of quality replacement parts for servicing all makes of radio sets on the market. Tubes, ballast tubes, radio pilot lights, flashlight bulbs, condensers of all types, resistors, resistance line cords, shielded i-f transformers, varied phonograph equipment, speakers, transformers, volume controls, drive belts, etc. form the Emerson replacement line.

Armour Research Foundation, 35 West 33rd Street, Chicago, has undertaken to operate a national registry of rare chemicals. It does not buy or sell, or store chemicals, but maintains an indexed file of their sources thus aiding those who do not know where to go to find sources of supply.

American Standards Association has announced a new American standard for dry cells and batteries for hearing aids, flashlights, telephones, ignition and portable radios, which will represent the best practice for many types of cells and batteries and will serve as starting point for new development after the war.

A. E. Bailey, Jr., sales manager of new G-E electronic control section. Mr. Bailey has long been associated with the applications of electron tubes to industrial purposes, one of his major contributions being the light control system of the Chicago Civic Opera House, 1929

Audio Productions Sold

SALE OF AUDIO Productions, Inc., to Frank K. Speidell, president, acting for himself and certain associates together with interests representing outside capital, by the Western Electric Company has taken place. For the past nine years, Audio Productions has been one of the leading producers in the fields of industrial, advertising and training films.

Mr. Speidell will continue as president of Audio with Herman Roessle, vice-president, and P. J. Mooney, secretary.

Audio is now actively engaged on government film contracts and is expanding its technical facilities and staff to provide an even larger production set-up for training motion pictures now urgently needed in many government departments and in defense industries.

Audio's new production headquarters and general offices are in the Film Center Building at 630 Ninth Ave., New York.

Moves

CINAUDAGRAPH SPEAKERS, INC., has moved all office, machinery and equipment to a new factory at 3911–3929 South Michigan Ave., Chicago. Additional floor space was thereby secured.

Lord Manufacturing Company's sales and engineering force has moved to 520 North Michigan Ave., Chicago. The entire building at 844 North Rush St., their former location has been purchased by the Government.

Jobs

FEDERAL TELEGRAPH Co., 200 Mt. Pleasant Ave., Newark, N. J. wants men who by experience in the radio service field, have acquired a suitable background to become rapidly familiar with the inspection and testing of radio equipment for the armed services. A number of jobs are also available in marine installation work for men with commercial licenses and with ship experience. Engineering positions are also open for men who, by study have acquired the knowledge equivalent to that required for an engineering degree. No 1-A draft classification men will be considered.

Women skilled in amateur radio engineering or any part of the electronics field are having an opportunity to enter the civilian ranks of the Army Signal Corps. So great is the need for radio and telephone personnel in this branch of the armed forces that a recruiting mission is touring the country interviewing people who are interested.

Appointments as commissioned officers of the United States Marine Corps Reserve, for assignments to special aircraft warning duties, are now being offered to men holding B.S. degrees in electrical, communication or radio engineering. College graduates with special training in physics or mathematics are also eligible. Experienced radio operators, technicians and repairmen are also wanted by the Marine Corps. Appointments with initial rank of staff sergeant are open to qualified men between the ages of 17 and 35 with the assurance that they will be assigned aircraft duties. Write to Commandant, Headquarters, United States Marine Corps, Washington, D. C.

Pan American Airways-Africa, Ltd.

W. D. Cockrell, engineer of the new G-E electronic control division. Mr. Cockrell has 27 patents on electronic control and in 1941 received a Charles A. Coffin Foundation award for the development of phototube control of large machines and presses

A New AUTOMATIC FREQUENCY RESPONSE RECORDER

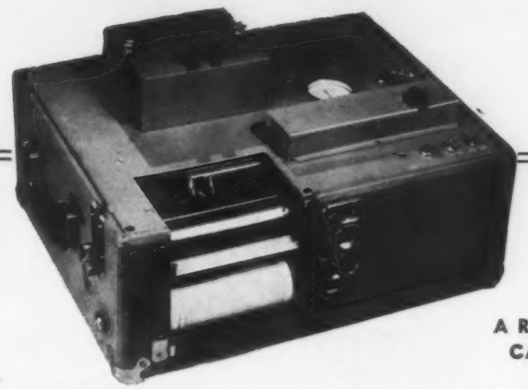

MANY NEW EXCLUSIVE FEATURES

A RECORD YOU CAN RELY ON

As its names implies, it will draw automatically and continually (on semi-log. paper, 4" wide) an accurate frequency characteristic of any audio transmission component or complete installation. Indispensable where rapid changes with respect to frequency occur and a continuous record is desirable; (Loudspeakers, microphones, etc.) Also for vibration and acoustical measurements.

The frequency response is essentially flat from 20 to 40 KC; it responds to a .2 of a DB change of the input signal.

If the DB Potentiometer is replaced by a linear type potentiometer, the instrument will be a recording ampere meter or volt meter.

Completely AC operated — light weight (40 lbs)—compact and portable.

The AUTOMATIC FREQUENCY RESPONSE RECORDER has many other new and exclusive features which are fully described in our Bulletin which we will send upon request.

• • • • •

SOUND APPARATUS COMPANY
150 West 46th St. New York, N. Y.

"M-M-M—A SUPPLY SOURCE FOR U.H.F. FIXED, MOBILE, or PORTABLE COMMUNICATION EQUIPMENT

Compact, rugged and dependable, ABBOTT ultra-high frequency transmitters and receivers are finding favor with military and home defense services.

May we quote on YOUR requirements?

ABBOTT INSTRUMENT, INC.
8 WEST 18 STREET • NEW YORK, N. Y

Obviously, this is NOT a military microphone

Nor have we any intention to illustrate any of the models which have been specifically designed for our fighting forces. After the war these advancements will be available for normal peacetime applications.

Until such time, we welcome requests for quotations from manufacturers who are producing Army, Navy or Aircraft communication equipment. All such correspondence will receive prompt and confidential attention.

ELECTRO-VOICE MFG. CO., Inc.
1239 SOUTH BEND AVENUE, SOUTH BEND, INDIANA
Export Division: 100 Varick St., New York, N. Y.—Cables: "Arlab"

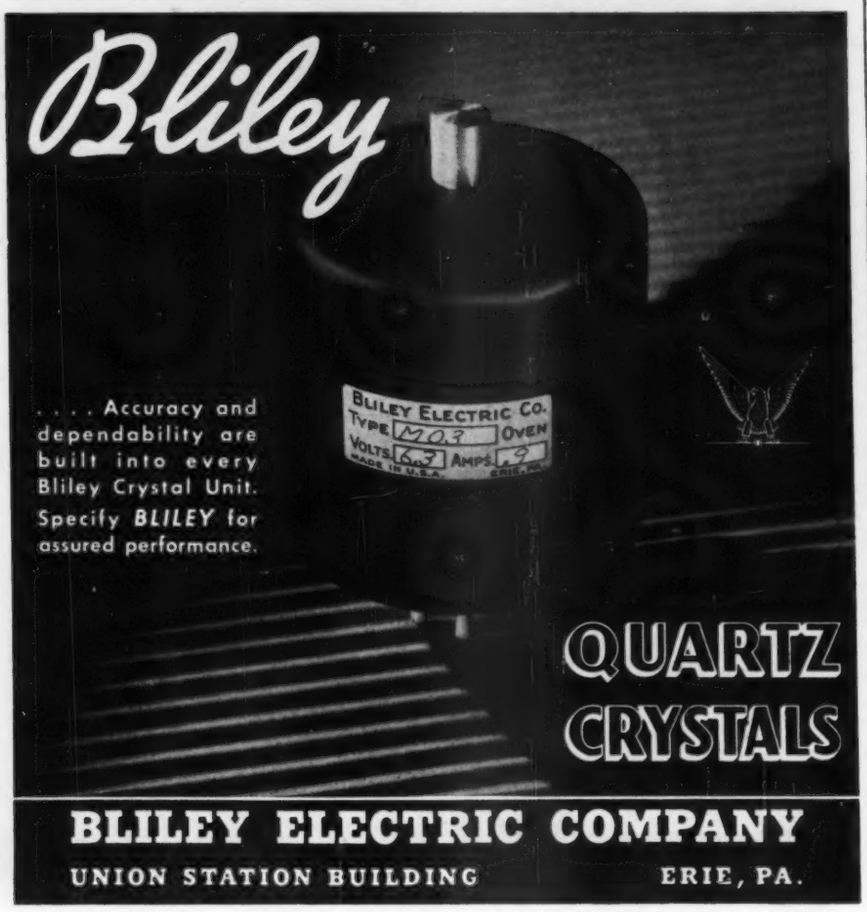
Bliley
. . . . Accuracy and dependability are built into every Bliley Crystal Unit. Specify BLILEY for assured performance.
BLILEY ELECTRIC CO.
TYPE MO-3 OVEN
VOLTS 6 AMPS .9
MADE IN U.S.A. ERIE, PA.
QUARTZ CRYSTALS

BLILEY ELECTRIC COMPANY
UNION STATION BUILDING ERIE, PA.

will train, at its own expense, a limited number of amateur radio operators for duty at its Africa stations.

In addition to free tuition the student will receive a salary of $100 per month until successful completion of this course, at which time he will depart for African duty at a salary of $250.00 per month plus all living and transportation expenses.

The Melville Aeronautical Radio School, 45 West 45th St., New York City, has been commissioned to train operators for Pan American Airways-Africa, Ltd.

Men between the ages of 18 and 45 with previous radio experience or training of any kind, in good health and free to travel are desired.

Opportunity for young women, high-school graduates with a bent toward mathematics and science, is offered by the Signal Corps which wants hundreds of such women to train as engineering aids. They will be trained for 6 to 9 months and then will be assigned as inspectors of communication equipment destined for the armed forces. Pay during training is $120 per month and starting with actual inspection work the salary is boosted to $135. These women are being registered and selected by the Third District of the U. S. Civil Service Commission, Philadelphia.

Marine Radio

ORDERS NOW ON hand by Radiomarine Corporation of America will bring the total vessels equipped with radio by this company to over 1000. Recently it received orders for radiotelegraph apparatus for 381 new Victory ships. It also has orders for 400 direction finders for vessels of this and other types.

Acoustics

TO MEET DEMANDS for acoustical experts in several government laboratories as well as the technical officer needs of the Army and Navy, four centers of instruction in acoustics will offer advanced training during the summer of 1942. The courses start June 15 at Case School of Applied Science, Cleveland; Brown University, Providence; University of California at Los Angeles; and the State University of Iowa, Iowa City. The courses are open to advanced undergraduates and to graduates in physics and engineering who will be available for employment upon completion of the course. During the time these subjects are offered, these schools will have other courses running and opportunity will thus be offered for men to round out their educational program.

People

WILLIAM M. BAILEY and Paul McKnight Deeley have been elected vice-presidents of the Cornell-Dubilier Electric Corporation, South Plainfield, N. J. Both of these men have been actively associated with the company since its for-

Polarized

JEWEL PILOT LIGHT ASSEMBLY

Now, the brightness of illumination, or colored signal light intensity, can be regulated *instantly*. For, a partial turn of the jewel dims or brightens the light intensity of our new No. 80 Type Assembly! Polarized discs, behind the jewel, arranged to be free to rotate with respect to each other, turn the trick!

Have you a copy of our catalog? It presents a complete line of standard and special Dial and Jewel Light Assemblies. We supply most of America's leading communications, aircraft and electrical manufacturers.

DRAKE MANUFACTURING CO.
1713 W. HUBBARD ST. • CHICAGO, U. S. A.

These are LITTELFUSE FACTORS — not "equivalents." It is the LITTELFUSE Twisted Element that protects against severe vibration—the LITTELFUSE Locked Cap Assembly that holds caps firmly under all conditions — the LITTELFUSE Gooseneck that takes up contraction and expansion.

Underwriters Approved Littelfuse

Mechanical Strength, Fatigue Resistance, and Long Vibration Life are LITTELFUSE qualities accounted for by its scientific structure. It will pay you to familiarize yourself on the details of *difference* among fuses. Send for the complete Littelfuse Catalog, listing fuses and mountings for every instrument service.

See Catalog for Littelfuse Extractor Posts and mountings for every requirement.

LITTELFUSE INC.
4755 RAVENSWOOD AVE CHICAGO, ILL.

mation. Mr. Bailey as chief engineer in charge of the Industrial and Transmitter Capacitor Divisions, and Mr. Deeley in charge of the Chemical Laboratories, the Electrolytic Capacitor Division and the Export Division.

Wallace K. Brown has been appointed vice-president in charge of procurement for the Crocker Wheeler Electric Manufacturing Company. He will coordinate and expedite all the related functions of the procurement and purchasing departments.

Jack DeWitt, chief engineer of WSM has left for the duration to work on equipment for the armed forces at the Bell Laboratories in Whippany. His successor is to be George Reynolds, veteran WSM engineer. Another loss at WSM is that of Walter E. Bearden of the engineering staff. He is going with the Columbia University Branch of the National Research Council to be stationed at Lakehurst, N. J.

Walter C. Evans, general manager of radio, x-ray and broadcasting divisions of the Westinghouse Electric and Manufacturing Company has been made a vice-president of the company.

E. H. Fritz has been appointed plant nanager of Stupakoff Ceramic and Manufacturing Company, Latrobe, Penna. Mr. Fritz is president of the Institute of Ceramic Engineers. Stupakoff is completing a large extension to its facilities for the production of Steatite insulators for radio and other communications services.

Dr. Joseph B. Engl, pioneer in sound film technique, died in New Jersey in April. Dr. Engl devoted practically his entire professional career to motion picture photography, and his patents issued in the very early days were the subject of continuous reference in litigation after sound pictures became the mode.

Another loss to the scientific world is that of Siegmund Strauss, an Austrian inventor who made notable contributions to the fields of radio and to the applications of electricity to medicine. Mr. Strauss first used a selenium cell in connection with a triode amplifier (1911); with von Lieben and Reisz made very early contributions to the electronic tube. Of recent years his contributions lay in the medical field. During 1910 to 1917 his papers appeared frequently in *ETZ* and in the London *Electrician*. He came to this country, a refugee, in 1940.

Aircraft Locaters

On April 23 newspapers carried stories regarding a press conference with Secretary of War Stimson that day giving some details of the aircraft warning systems now being located along the coast lines. According to this report, aircraft or ships at sea can be picked up more than 100 miles away. Mr. Stimson looked through one of the new warning instruments on a recent visit of inspection and "saw the electrical indication of a plane which I believe was sixty miles away."

Announcement

to the Readers of ELECTRONICS

YOUR attention is called to a Revolutionary Public Address System which embodies a speaker copied from the human larynx, resulting in the most powerful and efficient speaker system ever built.

The Dilks Fluid Flow Public Address System

It places the vibrations of sound where desired, as a searchlight places the vibrations of light where desired. The wasteful dissipation of sound upward is reduced more than 50%.

Other exclusive features of the Dilks Fluid Flow Public Address System include:

Highest fidelity sound reproduction at all amplifications.

Lowest cost per decibel of any sound system.

Simple as a radio to operate.

Costs but a fraction of far less powerful systems.

Light weight, compact, portable.

Approvals

Installed for Air Raid warnings in Boston, New Haven, Cambridge and other Atlantic coast cities. Furnished with a powerful oscillating unit, the Dilks System gives a distinctive sweep warble, and a clear steady note for all clear. Recommended also for music in War plants to step up production, and to faithfully amplify recorded messages from men at the front, and for open air and arena concerts and sports events.

For Engineering Data about this radically new Fluid Flow Public Address System kindly write.

DILKS SALES CO.
South Norwalk, Conn.

NEW PRODUCTS

Month after month, manufacturers develop new materials, new components, new measuring equipment; issue new technical bulletins, new catalogs. Each month descriptions of these new items will be found here

Photoelectric Relay

A NEW PHOTOELECTRIC CONTROL, designated as "Light Watchman" turns off show-window lights, illuminated signs, or protective lighting during blackouts. The control is a photoelectric relay which is actuated by the nearest street light. When the street light goes out at the start of a blackout, the photoelectric relay turns off the lights in the show window, sign, or protective lighting system. When the street light goes on again the controlled lights are again energized. The unit is highly directional, and is subject only to the control of the street light at which it is aimed. A short time delay prevents false operation of the relay by momentary flickering of street lights. If either of the two tubes in the relay fails, or if the sensitive relay coil is open-circuited, the relay is de-energized and the lights

are turned off. The operation of this device will not affect the normal functioning of a time switch, if one is used to turn on the lights at dusk and turn them off at a preselected time.

The "Light Watchman" is available in indoor or outdoor types, from General Electric Co., Schenectady, N. Y.

Radio and Telegraph Key

THE "GARCEAU ELECTROPLEX" KEY is an electronically operated semi-automatic or bug-key which is hand operated with the side-to-side motion of a paddle. Pressing the paddle to the right produces dots and to the left dashes. The speed of sending is continuously adjustable (even during the course of transmission) by a single control knob on the panel. At all speeds the mathematically correct proportion between

dots, spaces and dashes is preserved, resulting in good sending regardless of the idiosyncrasies of the operator. The transmission may be adjusted from less than 8 to over 80 words per minute. Power consumption is 17 watts at 115 volts either alternating or direct current. Key contacts will break loads up to 1/10th amp. A supplementary toggle switch is provided to hold a telegraph line closed when the key is not operating. Overall dimensions of the instrument are $4 \times 10\frac{1}{2} \times 3\frac{1}{2}$ inches. The cabinet is mounted on three rubber feet to prevent creeping. Net weight is 4 lbs.

Electro-Medical Laboratory Inc., Holliston, Mass.

Automatic Alarm Systems

THESE SYSTEMS ARE FOR use in conjunction with fences which have been built around property to protect it from saboteurs and intruders, and are especially useful during blackouts, fogs, or other adverse conditions. Each system includes two parts, the detector and the indicator. The system works on the principle of detection and amplification of vibration or sound. The detector (which is sealed in a small inconspicuous box) is of rugged and moisture-proof construction, and is an inertia type vibration instrument which is mounted on the guard fence at predetermined intervals. The indicator, which is located in an office or guard headquarters, is connected with the detector unit and supplies both audible and visible warning of any attempt by prowlers to scale, cut through or tunnel under a fence protected by the automatic alarm systems. The indicator operates on 110–120 volts, 60 cps (special voltages and frequencies are available if required) and conforms with government requirements of uninterrupted operation at temperatures varying from –40° F. to 130° F. The systems cannot be turned off or disconnected by other than an authorized individual.

If the protecting fence is constructed with a top rail or pipe, there is available Model 10 Automatic Alarm which utilizes this rail as a conduit for lines connected to detector units operating through the alarm indicator. Audible and visual signals of any desired intensity may be obtained from the detectors, and tampering with the fence in any way (even touching the fence) signals the presence of an intruder, and operates controls which will continue alarm signals until reset by the operator. This system consists of one automatic alarm indicator enclosed in a sealed steel cabinet, and three detector units sufficient for approximately 2200 feet of fence. Six such detector units can be used if necessary.

Where the segregation of two sections of fence for separate alarms is advisable, Model No. 11, illustrated below, is used. This system consists of one dual channel indicator and six detector units, three for each channel or section of fence. With this particular system it is possible to identify the particular section of fence from which the alarm originates, or on a double alarm to know that the danger lies between the two sections patrolled. The unit can be made to utilize twelve detectors.

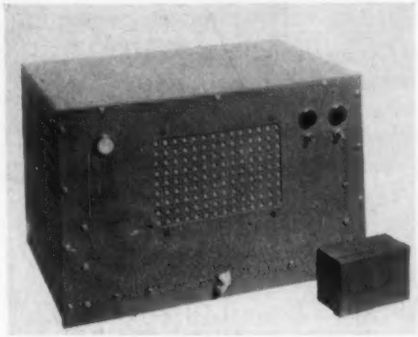

Model No. 30, besides patrolling the fence line, will also signal the failure of the alarm system that may be due to an open or short circuit in the detectors, detector lines or the indicator itself, whether caused by accident or tampering. The unit consists of one indicator and three detectors.

Model No. 31 combines all of the characteristics of individual models described above and is identical to Model No. 30 except that it utilizes the dual channel arrangement in one unit.

Automatic Alarms Inc., Youngstown, Ohio.

COMPLETE CONTROL

We trust no one else with any of the processes that go into the manufacture of B-H Sleeving and Tubing. Every step — from original braiding to final finishing is under our complete control. We are solely responsible for the quality of every foot of B-H.

FLEXIBLE

VARNISHED TUBING
MAGNETO TUBING
SATURATED SLEEVING
FIBRE GLASS TUBING
& SLEEVING

So if your specifications are exacting as to size, dielectric strength and flexibility we would like to show you how B-H products can meet them.

WRITE FOR SAMPLES

B-H

Bentley, Harris Mfg. Co.

CONSHOHOCKEN, PENNA.

CHICAGO OFFICE 440 W. Huron St.

MATHEMATICS FOR RADIO AND COMMUNICATION

by GEORGE F. MAEDEL, A.B., E.E.

Chief Instructor, N. Y. School, RCA Institutes

To master the technicalities of radio—to read engineering literature intelligently—you must have the mathematical groundwork covered by these absorbing books prepared for home study. Book I (314 pp.) covers the algebra, arithmetic, and geometry; Book II (329 pp.) covers the advanced algebra, trigonometry, and complex numbers necessary to read technical books and articles on radio.

MAEDEL PUBLISHING HOUSE **Room 108**
593 East 38 Street, Brooklyn, New York

Send me MATHEMATICS FOR RADIO AND COMMUNICATION as checked below. I enclose payment therefor with the understanding that I may return the book(s) within 5 days in good condition and my money will be refunded.

Name .....

Address .....

.....

☐ Book I at $3.75 plus 3c postage
☐ Book II at $4.00 plus 3c postage
☐ Books I and II at $7.75 postage prepaid
Foreign and Canadian prices 25c per volume higher.

Recording Discs

NEW RECORDING DISCS known as "Black Seal Glass Base Recording Discs" may be described as all glass discs in either a thin, flexible weight, or medium weight in 10, 12 or 16 inch sizes; both weights are available with either two

or four holes; there are no fibre or other foreign material inserts: there are no metal grommets around the holes; and, finally, the holes of the discs are precision machined directly in the glass.

These discs are available from The Gould-Moody Co., 395 Broadway, New York, N. Y.

Sectional Resistors

FOR USE IN RADIO CIRCUITS, power rectifiers and laboratories for measuring any high voltage a-c or d-c circuit of 250 to 30,000 volts, a new sectional resistor is available. The unit is designed to replace, in certain cases, the old box type resistor which had a high power consumption and was inconvenient to install or replace. Made up of individual, hermetically sealed units wire wound around a ceramic resistor spool, the resistor units have values of from 0.25 to one megohm and a rated current of 1 ma. Dimensions are 1⅜x1¼ inches in diameter per section. The ceramic resistor spool is sectionalized, and adjacent sections are wound in opposite di-

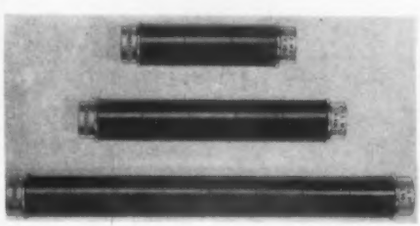

rections to obtain a non-inductive resistance.

Resistance is held within close tolerances permitting interchargeability of units having the same voltage rating. When a number of sections are mounted on one shaft, permanent taps may be taken off between any two sec-

MICRO-PROCESSED BERYLLIUM COPPER COIL OR FLAT SPRINGS

Eliminate-Drift Set-Fatigue

I-S beryllium copper coil springs are definitely superior—the result of micro-processing, a radically different technique, for making beryllium copper springs, perfected by Instrument Specialties Company after eight years of metallurgical research. *Micro-Processing makes the difference.*

First—I-S springs are made with special machines and tools of our own design. Economical for short or long runs.

Second — Special heat-treatment — laboratory controlled for each production lot—assures the desired physical properties for each shipment of I-S springs.

Third—With the Carson Electronic Spring Tester, our laboratory predicts controls and tests to closer tolerances.*

Fourth—Micro-Processed beryllium copper has higher strength and conductivity, better endurance, stability, and heat resistance than stainless steel or bronze. Better corrosion resistance and less drift than steel.

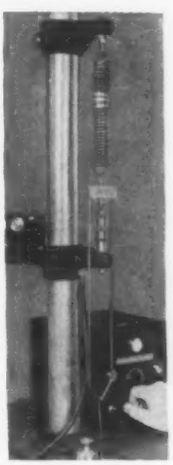

***COIL SPRING STANDARD PRODUCTION TOLERANCES**

Inside diameter, up to ½ in. (any wire diameter) .003
Load test at working length. 5%

FLAT SPRING STANDARD TOLERANCES

Angles—within ½° in bends.
Flatness—within .001 to .003 in. per inch of length.

Spring measurement has been revolutionized by the Carson Electronic Spring Tester—an exclusive I-S development. Measuring to ten-millionths of an inch without pressure, this superior precision instrument enables I-S to control and test within closer limits. Extensive spring research is constantly in progress in the I-S laboratory.

Write today for Bulletin #4 for further details on micro-processed beryllium copper springs. There is a difference. InSist on I-S.

"MICRO-PROCESSED" I S BERYLLIUM COPPER SPRINGS

INSTRUMENT SPECIALTIES CO., INC.
DEPT. S, LITTLE FALLS, NEW JERSEY

TO BUILD SPECIAL UNITS MORE EASILY



A DIAL DESIGNED FOR INDIVIDUAL CALIBRATION

TYPE ACN DIAL

- Dial bezel acts as drilling template.
- Blank scales for direct calibration.
- Index holes in pointer for pricking calibration points.
- Scale removable without dismounting mechanism.
- Employs Velvet Vernier Drive Unit.



A UNIT COMBINATION OF COIL AND CONDENSER

TYPE AR-16 COIL & TMK CONDENSER

- Plug-in coils fit swivel mount.
- Air-spaced coils or plain coil forms available.
- Low loss construction throughout.
- Rigid condenser frame for permanent calibration.
- Condenser mounts on panel, chassis or standoff insulators.
- Condenser capacities to 250 mmf.



AN INSULATED COUPLING THAT WORKS AROUND CORNERS

TYPE TX-12

- Isolantite insulation.
- High quality flexible shafting.
- Fits ¼" shafts.

NATIONAL COMPANY, INC.

MALDEN MASS.

tions, permitting a multiplicity of resistance combinations on one complete unit. For switchboard mounting, insulators are available in 7.5, 15 and 30-kv sizes.

Westinghouse Meter Div., Newark, N. J.

Relays

TWO TYPES OF LOCKING relays with electrical release are available for operation on any nominal voltage under 125 volts alternating or direct current.

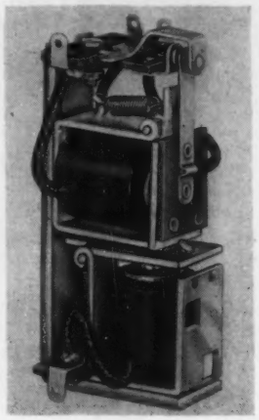

These are Type A.R.L. (top photo) which is a single pole double throw relay, and measures $1\frac{5}{8}$x$2\frac{3}{4}$x1 inches; and Type A.J.L. (bottom photo) which is a double pole double throw relay and measures $3\frac{1}{4}$x$1\frac{3}{4}$x1 inches. Features of these relays are: minimum mounting

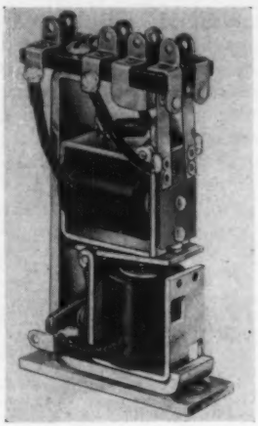

base area, small size and weight, ability to withstand vibrations. They have coils for momentary and continuous duty. The contact rating for Type A.J.L. is 5 amps non-inductive on 110 volts a.c., or 24 volts d.c. Standard operating voltages for both types are 6, 12 to 24 on d.c., and 6, 24 to 110 on a.c.

Allied Control Co., Inc., 227 Fulton St., New York, N. Y.

New Carter AIRCRAFT TYPE GENEMOTORS

● SENSATIONAL!! That's the word for the new Carter Multi-Output Dynamotor. Since its introduction a year ago, Police Departments, Government Agencies, and manufacturers of Tank Radio Equipment have found it has no equal for small size, high efficiency, and extra light weight. It's the coming thing for all Transmitter and Receiver installations

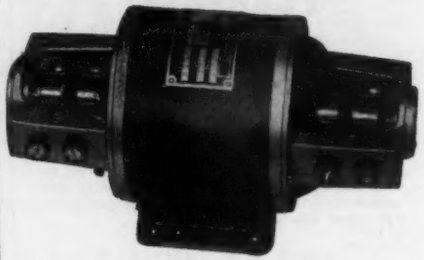

● Write today for descriptive literature on Carter Dynamotors—D.C. to A.C. Converters—Magmotors—Heavy Duty Permanent Magnet Hand Generators—Special Motors—High Frequency Converters—Extra Small A.C. Generators—Permanent Magnet Dynamotors and Generators.

Carter Motor Co.
CHICAGO ILLINOIS

1606 Milwaukee Ave. Cable: Genemotor

Carter, a well known name in radio since 1922

PLASTICS

VINYLITE · CELLULOID · ACETATE

★

FABRICATED PARTS
Printed - Laminated

INJECTION MOLDING

DIALS, SCALES, WINDOWS, KNOBS AND SPECIAL PARTS for RADIOS, INSTRUMENTS,

—and—

COMMUNICATIONS and ELECTRICAL EQUIPMENT

★

PRINTING, DIE STAMPING, FORMING, MOLDING, ETC.

★

Bids cheerfully submitted

THE EMELOID CO., INC.
Plastic Fabricators Since 1919
ARLINGTON, N. J.

Acorn Tube Socket

THE CERAMIC OF THIS new socket is of grade G Steatite, glazed on top and sides and impregnated in Cerese AA wax to prevent moisture absorption. It has very low losses at ultrahigh frequencies. Contacts are of grade C tempered phosphor bronze heavily silver plated to withstand 100 hours salt spray test, and are designed to hold the tubes with a minimum of insertion pressure under severe vibration tests. Contact jaws effect a scissor-hold on tube pin, and assure electrical contact. Another tube socket is of the lock-in type and utilizes a molded shell of mica-filled low-loss phenolic material for use at high frequencies.

A. W. Franklin Mfg. Corp., 175 Varick St., New York, N. Y.

Vacuum Relay

THE PRINCIPAL OF ENCLOSING CONTACTS subject to arcing in a vacuum is used in a small, light weight antenna switching unit. The unit can handle an r-f potential of 20,000 volts at 30,000 feet altitude and provides instantaneous break-in for keying operations. The high vacuum prevents transfer of energy between the open contacts. The relay consists of a single pole double throw switch enclosed in a highly evacuated glass envelope. The armature when actuated by an external electromagnet transfers the circuit from receiver

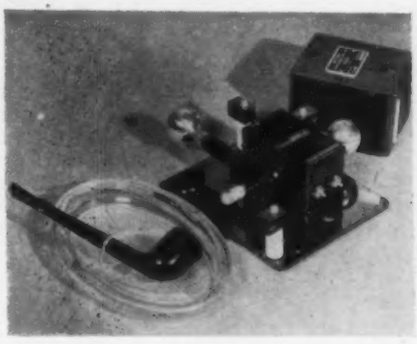

to transmitter. As the space between the open contacts is approximately 0.015 inches and because of the small mass of the armature, the transfer is fast enough for instantaneous break-in. This speed enables keying at 40 words per minute.

All maintenance is eliminated due to permanently fixed contacts which are enclosed in the glass envelope. This also makes the unit entirely independent of climatic conditions, altitude dirt or oxidation. Coils, which are capable of continuous operation, can be supplied for any of the common voltages. The unit weighs 24 ounces, including case, and measures 2⅝x5⅝x6⅛ inches overall.

Bendix Aviation, Ltd., Burbank, Cal.

● *Laboratory Standards*

Standard Signal Generators

Vacuum Tube Voltmeters

Square Wave Generators

U. H. F. Noisemeters

Pulse Generators

Measurements Corporation

Boonton New Jersey

ELECTRICAL COIL WINDINGS

Made To Specifications For

PLANES — TANKS — SHIPS

Radio Communication

Signal and Fire Control Equipment

Part of our production capacity, and all of our 25 years experience are available for war production. We're aiding scores of prime contractors to the Army-Navy-Air Corps and Maritime Commission

May We Help You?

Write – Wire – Phone

COTO-COIL CO., INC.

70 Willard Ave. Providence, R. I.

Excellent Facilities for Electrical and Mechanical Sub-contracts. Send for Facilities Record or Phone GAspee 4371

ALLIED

GLASS BASE RECORDING DISCS

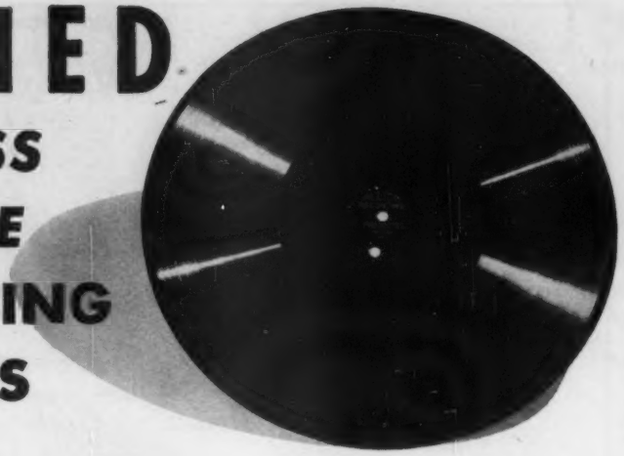

FOR six years, Allied has manufactured top quality, professional recording discs for an increasing number of critical users. Our change-over from aluminum to glass base discs was successfully accomplished more than a year ago. Control in manufacture, close inspection, and constant care in every manufacturing, packing and shipping detail—results a one quality, first quality line—guaranteed to be uniform whether you order one or a thousand discs. Our regular customers continue to send us repeat orders—indicating satisfaction. If you are not using Allied Glass Base Discs, a trial will convince you of their merits and superior quality. Your inquiry will receive our prompt and courteous attention.

RECOATING SERVICE for your old aluminum discs. Delivery in one week. Details on request.

It is *economical* and *saves you money* to buy direct from the manufacturer. PROMPT DELIVERY to any part of the United States, Canada, South America and some foreign countries.

ALLIED RECORDING PRODUCTS CO.

21-09 43rd Ave., Long Island City, N. Y.

Phone: STillwell 4-2318 • Cable: Allrecord New York

A MESSAGE TO ELECTRICAL DESIGN ENGINEERS.....

of radio, communication, electrical, aircraft, automotive and electronic equipment

B & C insulation materials include: Varnished Tubing, Saturated Sleeving, Varnished Cambric, Varnished Paper, and Extruded Plastic Tubing —all of the highest quality—manufactured to A.S.T.M. standards.

B & C insulation products are now being used in constantly increasing quantities and uses in the defense industries—including radio and electrical equipment and components, aircraft plants, leading industrials, and by many government departments.

We will welcome the opportunity to work with you on your insulation problems. Send us your specifications. Samples and prices will be submitted promptly. Our accelerated manufacturing schedule is now in operation.

● *Free sample display board #442 of tubing sent upon letterhead request.*

B & C INSULATION PRODUCTS, INC.

22 WEST 21st STREET, NEW YORK, N. Y.

CHICAGO OFFICE : 831 NO. WABASH AVE.

Sales representatives in principal cities

Low-Frequency Linear-Time-Base Generator

THIS PORTABLE GENERATOR (Type 215) is for use where oscillographic studies require sweep frequencies as low as one cycle every few seconds. It may be used in conjunction with an oscillograph provided with a long-persistence cathode-ray tube, or with photographic recording methods. Vibrations studies, stress and strain measurements, low-frequency electrical observation, electrocardiography and electroencephalography, may also be studied. The frequency range of the instrument corresponds to rotating speeds of 12 to 7500 rpm. Transient observation is provided for by a single-stroke sweep circuit. The generator provides a sweep frequency range of 0.2 to 125 cps. The maximum undistorted output signal is approximately 450 volts peak-to-peak, balanced to ground. The single sweep is initiated either manually or by an observed signal. Linearity is assured by a compensating circuit. It measures 14¼x8$\frac{13}{16}$x19½ inches, and is rated at 115 or 230 volts alternating current, 40–60 cps. Power consumption is 50 watts and fuse protection is 1 amp. The primary voltage is selected by a switch in the instrument.

Allen B. DuMont Labs., Inc., Passaic, N. J.

Thin Slot Insulations

TO PROVIDE NON-BULKING SLOT insulation for use in confined or limited space, a new thin type of insulation, called "Irv-o-slot" is available in seven different thicknesses, dielectric strengths and advantages. "Irv-o-slot" insulation consists of fish or Spauldo papers coated with resin, or bonded by means of a plastic insulator, to cambric, silk or Fiberglass. These insulations possess strength and toughness as protection

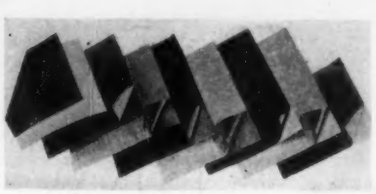

against mechanical stresses, and have high dielectric strength. The duplexed "Irv-o-slot" and Spauldo paper have good heat resistance. The bonded insulations have high moisture resistance. The insulation is flexible and easy to form. It is available in sheets and also tape form ready to be cut into slot strips.

Irvington Varnish & Insulator Co., Irvington, N. J.

Recommended . . .
for all delicate and precise Electrical and Laboratory Equipment

Leaves no residue of
DIRT or STICKY GUM . . .

Available . . .
in small bottles with applicator, as illustrated, or in 8 ounce, 16 ounce and gallon containers.

DAVENOIL COMPANY
158 SUMMIT STREET • NEWARK, N. J.

JACKSON
Resistance-Capacity Tuned
★ AUDIO OSCILLATOR

Model 652

Here is a tried, proven and accepted Audio Oscillator whose brilliant performance sets it apart from other makes. Audio Frequency voltage is developed at its Fundamental Frequency—by the *Resistance-Capacity Tuned* Principle. This is not a "beat frequency" oscillator and contains no R.F. circuits. Operation is vastly simplified. Characteristic faults of old style methods are eliminated. Glass enclosed direct reading dial is accurate to within 3% or one cycle. Many other outstanding features. Price $88.50.

Write for descriptive literature

THE JACKSON ELECTRICAL INSTRUMENT COMPANY
123 Wayne Avenue Dayton, Ohio

Low-loss H-f Coaxial Cable

FOR RADIO, TELEVISION, CONTROL and test equipment is a new type of co-axial cable which meets the requirements of military specifications for h-f low-loss cables. The central conductor is insulated to a suitable diameter with a recently developed low-loss dielectric, then covered with a copper braid which serves as a concentric outer conductor. The entire assembly is protected by a jacket, or sheath, made of a synthetic plastic called Simplex-Plastex. The cable itself is flexible, easy to install, and can be used on the highest radio frequencies. Moisture is eliminated and there is no internal condensation.

Simplex Wire & Cable Co., Cambridge, Mass.

Garceau Electroencephalograph

THIS IS AN ELECTRONIC DIAGNOSTIC instrument which was recently redesigned from a cumbersome and unwieldy cabinet to a compact Lindsay Structure all-steel housing. In changing the housing, the manufacturer also transformed the instrument from a complicated apparatus which could be used only by a specialized laboratory, into practical piece of medical equipment which can be operated by a non-technical person. The instrument is mainly for use in neurology, but it can also be used in

detecting epileptic tendencies in men selected for aviation training, as well as in the diagnosis of brain injuries associated with head wounds.

It consists of a vacuum tube amplifier and an oscillographic recording system. Small electrodes are placed in selective positions upon the scalp of the patient. The minute electrical potentials generated by the brain are picked up by the apparatus and amplified and recorded as an oscillogram which reveals to the diagnostician such information as the presence and location of brain tumors, focus of scars causing epilespsy, and epileptic tendencies.

Electro-Medical Laboratory, Inc., Holliston, Mass.

Mounted and Unmounted

PHOTO ELECTRIC CELLS

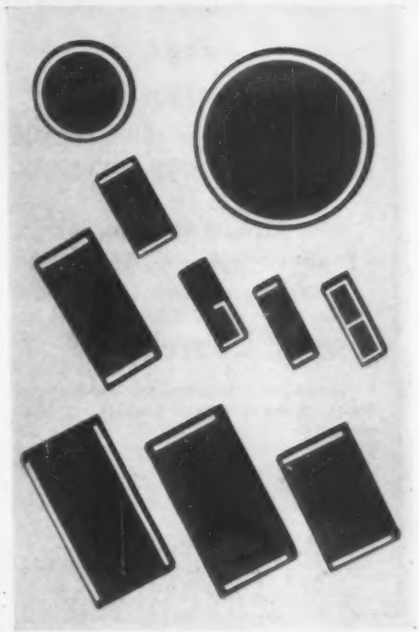

A Unit for Every Type Application

• Luxtron Photo-Electric Cells meet a wide variety of scientific and industrial requirements . . . measurement, analysis, indication, metering, control, signal, inspection, sound reproduction, etc. Available in a deversity of sizes, type, shapes and capacities, Luxtron units can also be produced to meet special needs. The Bradley Laboratories will gladly cooperate with engineers and designers; inquiries wanted. Write for illustrated literature.

*Luxtron**
PHOTO ELECTRIC CELLS
BRADLEY LABORATORIES, INC.
82 MEADOW ST. • NEW HAVEN, CONN.
*Reg. U.S. Pat. Off.

SOUND SCRIBER

embossed groove

DISC RECORDERS

for

**MICROPHONIC
COMMUNICATION — CONFERENCE
MOBILE—DICTATION RECORDING**

**Low Distortion
Frequency Range 150-4000
cycles**

★ REFERENCE RECORDERS

4 turntables operate continuously 2 hours without record change. 1 hour on each 7" disc (both sides) 300 grooves to the inch—22 rpm. Steel Cabinet. Approx. 35" x 20" x 15" Weight 225 lbs.

★ DUAL CONTINUOUS RECORDERS

Two 7" turntables with automatic timing unit operate continuously for 30 minutes without manual attention. 200 grooves to the inch. 33 rpm. Completely portable in leatherette or leather case. 18¾"x13¼"x8¼" Weight 50 lbs.

★ PORTABLE RECORDERS

Completely self-contained single turntable unit with inbuilt microphone, 200 grooves to the inch 33 rpm. Leatherette or genuine leather covered container. 13"x9½"x8¾". Weight 24 lbs.

★ STANDARD DICTATION and TRANSCRIBING MACHINES

For all-electric recording and transcribing. Adaptable to every form of office dictation and sound recording. Records 200 grooves to the inch. 33 rpm. Sturdy, handsome walnut cabinets. 11¾"x10"x7¾" Weight 17 lbs.

●

7" indestructible plastic discs, .010 inches thick are filable and mailable. All equipment available for 6 volt storage battery and other current sources by use of suitable converters.

*For detailed specifications—
wire—phone—write*

THE SOUND SCRIBER CORPORATION
82 Audubon Street New Haven, Conn.

Air Raid Siren

A NEW ELECTRONIC TYPE air raid siren called "Electro-Siren" is designed to give great volume for alarms. It makes use of a vacuum-tube tone generator which can either duplicate the rising and falling tone of a mechanical siren, or can be set at any pitch for best audibility over traffic or manufacturing noises. It can also be used to send code messages to air raid officials by dots and dashes. It has an arrangement so that a microphone can be used for voice announcements over the same system, which takes the place of a PA system. The unit operates from 110 volts source, but in case of current failure can be switched to 6 volt storage battery operation. It can also be used in police cars or other vehicles, operating from the car battery. The largest system can be operated continuously for four hours from a fully charged battery.

Audiograph Div., John Meck Industries, 1313 W. Randolph St., Chicago.

Aircraft Relays

THREE NEW RELAYS for aircraft or tank service have been announced. The first of these is a single-pole relay which is available in two forms—a single circuit form with one normally open contact (CR2791–B100A), and a two-circuit form with one normally open and one normally closed contact (CR2791–B100C). It has a maximum continuous current rating of 20 amps at 12 or 24 volts, and a maximum make or break rating of 100 amps at 12 or 24 volts. The coil operates at 1.2 watts. The relay weighs 3 ounces in the normally open form, and 3.4 ounces in the normally open, normally closed form. Tip travel is $\frac{1}{32}$ inch and tip pressure is 40 grams. The relay measures $1\frac{3}{4}$x$1\frac{3}{8}$x$1\frac{5}{16}$ inches.

The high-voltage relay (CR2791–D100F) is designed especially for use with aircraft radio transmitting equipment. The use of ceramic insulation and double-break contacts permits control of circuits as high as 1,000 volts direct current. The contacts have maximum current ratings of 0.020 amp. at 1000 volts direct current, and 0.100 amp. at 500 volts direct current. This relay has a coil wattage of 1.2, a tip travel of $\frac{1}{16}$ inch double-break, and a tip pressure of 25 grams. The contacts are arranged for double-pole, double-throw, double-break operation. The relay measures $2\frac{5}{16}$x$1\frac{1}{16}$x$1\frac{1}{16}$ inches.

The two- and three-pole relays are provided in two forms. One form (CR2791–B100D,G) has one normally open circuit per pole, and the other (CR2791–B100F,J) has one normally open and one normally closed circuit per pole. These relays have maximum continuous current ratings of 8 amps. at 12 or 24 volts, and the maximum make or break ratings at 25 amps. at 12 or 24 volts. The coils operate at 1.2 volts. Both two-pole forms are $1\frac{53}{64}$x$1\frac{3}{8}$x$1\frac{31}{64}$ inches, and

**—MICO—
ENGRAVER**

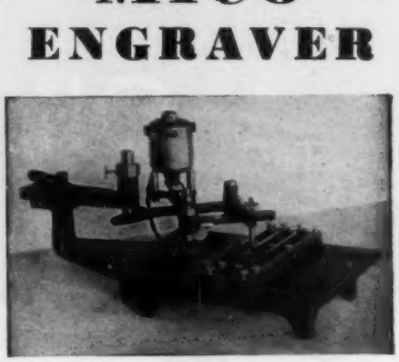

For lettering panels of steel, aluminum, brass, or bakelite, or for marking finished apparatus.

A sturdy machine for routine production as well as occasional engraving.

Attachments increase its versatility to include large work on flat or curved surfaces.

Excellent engraving can be produced by an inexperienced operator.

Catalogue on request
Prompt Delivery

Priced from $115 with type

Mico Instrument Co.

**20 ARROW STREET
CAMBRIDGE, MASS.**

"Keep 'em Moving"

ACCURACY IS IMPERATIVE!

INSIST ON INSTRUMENTS WITH

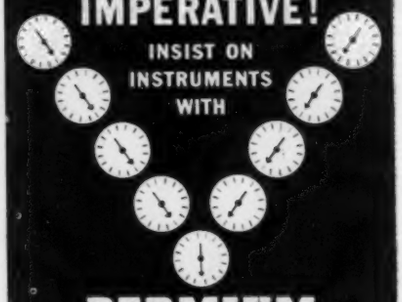

PERMIUM

Pivots—Alloy Jewel Bearings

- For Permanence
- Lifetime Accuracy
- Maintained Precision
- Less Maintenance
- Replaces Sapphire

Steel pivots corrode, rust—use the NEW HOMO-HEXTEROAXIAL WEAR-RESISTING ALLOYS (1000 times life of tool steel) "Used in preference to jewels."

PERMIUM—AEROPOINT—PERMETTE

Non-corrosive • Non-magnetic
Super Smooth • Less Friction

THE PARALOY CO.
Manufacturing Engineers
600 S. MICHIGAN AVE. • CHICAGO, ILL.

weigh 3.5 ounces. The three-pole forms are $1\frac{35}{32}$x$1\frac{1}{4}$x$1\frac{31}{32}$ inches and weigh 3.75 ounces. All four forms have a tip travel of $\frac{1}{32}$ in. and a tip pressure of 28 grams.

These relays are designed for use from minus 40° C to plus 95° C. They are suitable for use from sea level to 40,000 feet, and are corrosion-proof, meeting Navy 200-hour salt-spray tests. They are good for mechanical frequencies of 5 to 55 cps at $\frac{1}{32}$ inch maximum amplitude ($\frac{1}{16}$ inch total travel) applied in any direction. The contacts remain in the correct position when the relays are subjected to a linear acceleration of ten times gravity in any direction.

General Electric Co., Schenectady, N. Y.

Literature

Wire Data Chart. A useful chart for persons who employ wire in their designs or specifications. In columnar tabulation are given the B & S, Washburn & Moen and Stubs or Birmingham diameters for gauge sizes 1 to 50. The B & S column shows feet per pound for each size of standard 5 percent phosphor bronze. Also a table of conversion factors for obtaining ft/lb

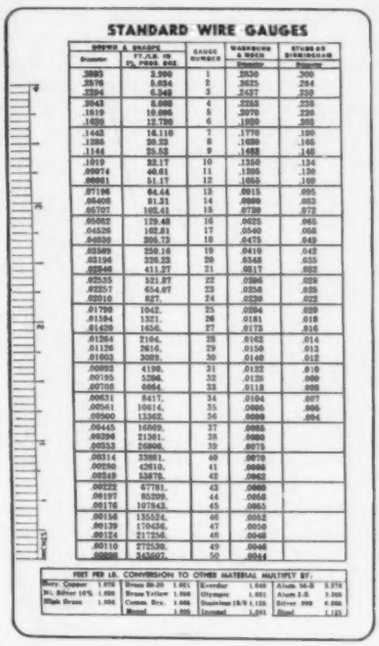
STANDARD WIRE GAUGES

values for 15 other common wire materials. On the reverse side of the card details of the composition, strength for hard and soft grades, percentage of elongation, and density are given. The card is heavy white celluloid, vest pocket size. Callite Tungsten Corp., Wire Division, Union City, N. J.

CONSULT INSULINE Now...

for PRODUCTS and PARTS

ESSENTIAL IN THE MANUFACTURE OF

ELECTRONIC APPARATUS

FOR war-order contractors we are in an excellent position to manufacture:—

- Metal Cabinets, Chassis, Panels, Racks, Boxes
- Metal Stampings; also Name Plates, Dials, etc.
- Completely assembled Screw Machine Products
- Hardware and accessories

New Catalog gives you a picture story of Insuline's enlarged manufacturing facilities, and general descriptions of products and parts . . . Write for your copy now.

We invite inquiries on SPECIAL WORK FOR MANUFACTURERS, such as: Screw Machine Parts, Engraving, Machining, Stamping, etc.

It will pay you to consult Insuline . . . now!

INSULINE CORP. OF AMERICA

30-34 NORTHERN BLVD., LONG ISLAND CITY, N. Y.

INSULINE CORP. OF AMERICA ICA TRADE MARK

Streamline SHEET-METAL HOUSINGS

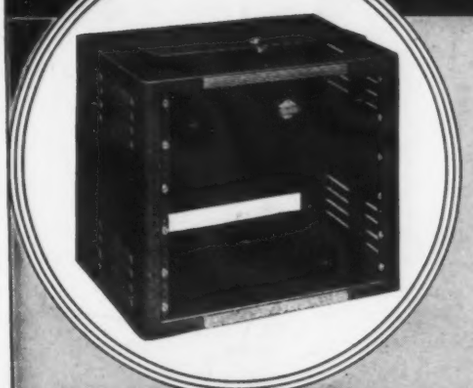

GENERAL CABINET RACKS

Featuring Beauty, Durability and Economy, these Streamline Cabinet Racks afford the BEST in enclosures for an endless variety of industrial electronic installations. The five cabinets made in this series accommodate 19" rack panels in heights from 8¾" to 35".

Call on our Sheet Metal Department for estimates on your special requirements. We make custom-built cabinets, panels and punched chassis for many types of commercial applications.

MIDGET CONDENSERS

BUD precision-built midget condensers are made in many types and capacities for a variety of commercial requirements. They feature Alsimag 196 insulation, positive wiping rotor contact, electro-soldered rotor and stator assemblies, bright cadmium plated finish, and rugged mechanical construction. We will be pleased to furnish estimates on your requirements.



BUD BUD RADIO, INC.

CLEVELAND, OHIO

KENYON
BRINGS IT THRU

KENYON is serving the Allied forces on the land . . . in the air . . . and under the sea. Whether it's an airplane flying for war or peace . . . whether it's a ship at sea or a submarine signalling beneath . . . whether it's a broadcasting station bringing the news . . . or a long-distance telephone call announcing a birth or a death . . . Kenyon Transformers are on the job. In the exigencies of war and along the byways of peace the efficiency and high fidelity of Kenyon Transformers are playing a part.

KENYON TRANSFORMER CO., INC.
840 BARRY STREET **NEW YORK, N. Y.**

ALLIED PRECISION BUILT LATCHING RELAYS

ALLIED presents a new line of mechanical lock, electrical release relays. They are designed for operation on any nominal voltage under 125 A. C. or 50 D. C. Current types are available in single pole double throw and double pole double throw.

This new line of relays has important features such as compactness, light weight, and minimum base mounting area. They are designed to meet Aircraft vibration tests and Army and Navy temperature and humidity requirements.

Allied Control Company, Inc. has specialized in the development of relays to meet critical test specifications. Special adaptations of standard relays to meet your specific requirements are solicited.

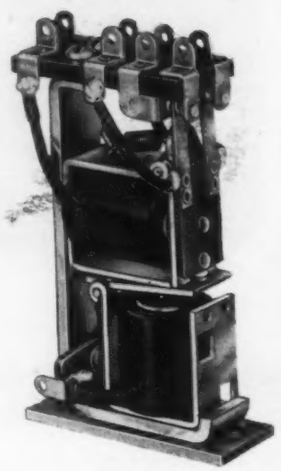

Type BJL D.P.D.T.

Inquiries from aircraft and other designing engineers will receive prompt attention.

ALLIED CONTROL COMPANY, INC.
227 FULTON STREET **NEW YORK CITY**

Definitions of Electrical Terms. A new American Standard known as Definitions of Electrical Terms, C42, sponsored by the American Institute of Electrical Engineers, is now ready for general distribution. It is the first time the definitions of the important terms common to all branches of the art as well as those specifically related to each of the various branches have been assembled and printed under one cover. This glossary is the result of more than twelve years of work of a sectional committee. The thirty-four organizations represented on this sectional committee include the national engineering, scientific and professional societies, trade associations, government departments and miscellaneous groups.

The primary aim in the formulation of the definitions has been to express for each term the meaning which is generally associated with it in electrical engineering in America. The definitions have been generalized wherever practicable to avoid precluding the various specific interpretations which may be attached to a term in particular applications.

The book contains three hundred pages, size 8 x 11 inches, and is indexed. It sells for $1.00 net each in U.S.A., and $1.25 outside of U.S.A. The price is the same for single copies or quantities. Checks should be made payable to American Institute of Electrical Engineers, and addressed to their headquarters at 33 West 39th Street, New York, N. Y.

Electronic Equipment. A 16 page catalog listing various stock items in rheostats, resistors, tap switches, chokes and attenuators. It contains illustrations, descriptions, ratings, prices and other helpful information. A copy of catalog 18 may be obtained from Ohmite Mfg. Co., Dept. 4-A, 4835 Flournoy St., Chicago, Ill.

Switches. The application, overtravel, operating mechanism and maintenance and inspection of small precision limit switches is described and illustrated in a new listing of dimension sheets by the Square D Co, Milwaukee, Wisconsin.

Induction Heating Data Sheet. A data sheet covering the fundamentals of induction heating. It gives a description of induction heating, current, frequency, magnetic fields, and heat producing losses. This is the first of a series of data sheets and from now on they will be released monthly by the Induction Heating Corp., 389 Lafayette St., New York City.

Rubber Conservation. This booklet gives explicit instructions for the proper care of many types of rubber goods such as electrical tapes, wires and cables, mountings, etc. Harmful effects of grease, oil and solvents is also discussed. U. S. Rubber Co., Rockefeller Center, New York, N. Y.

A Precision Crystal
Secondary
FREQUENCY STANDARD
THAT HAS BEEN
"Designed for Application"

A precision frequency standard capable of being adjusted to WWV or some other primary standard and putting out uniformly accurate calibrating signals with 10, 25, 100, 1000 KC intervals. Uses the new GENERAL ELECTRIC No. 18A 1000 KC crystal having a frequency temperature coefficient of less than one cycle /Mc/C°. The crystal is sealed in Helium in a standard metal tube envelope.

The self-contained AC power supply has VR150-30 voltage regulator tube.

In addition to oscillator, multivibrators, and harmonic amplifier, a built-in mixer with phone jack and gain control on panel is incorporated.

JAMES MILLEN MFG. CO. INC.
150 EXCHANGE ST. MALDEN, MASS.

JAGABI "LUBRI-TACT"
LABORATORY RHEOSTATS

JAMES G. BIDDLE CO.
Electrical Instruments
1211-13 Arch Street Philadelphia, Pa.

Tube Data Sheets. Application, characteristics, operating conditions and performance of several kinds of tubes are given in these sheets released by Eitel-McCullough, Inc., San Bruno, California.

Air Raid and Blackout Devices. A four page booklet describes automatic air raid siren controls, automatic blackout relays and automatic auxiliary systems. A brief description of other items manufactured is also included. This may be obtained from the Automatic Electric Mfg. Co., Mankato, Minnesota.

Quick Selector Catalog. A 64 page book covers safety switches, nofuse breakers, multi-breakers, panelboards, motor control and motors. New application data on latest equipment has been included. Electrical ratings, physical dimensions and circuit diagrams help in the selection of equipment. This revise may be obtained from Dept. 70-N-20, Westinghouse Elect. and Mfg. Co., E. Pittsburgh, Pa.

Electronics Parts and Equipment. The purpose of this booklet is to introduce the type of jobs which can be done for manufacturers of signal apparatus, transmitting and receiving apparatus, devices and parts. Insuline Corp. has expanded its facilities for large scale production of complete jobs or special jobs such as screw machine work, stamping, engraving, machining, finishing, or assembly.

The booklet describes and illustrates such equipment as various types of cabinets, amplifier units, trim mouldings and plates, handles, heavy duty bases, chassis bottom plates, front chassis, panels, and over twenty-five different component parts.

Insuline Corp. of America, 30-30 Northern Boulevard, Long Island City, N. Y.

Snubbing Mountings. The application of bonded rubber vertical snubbing mountings for vibration control and shock absorption in equipment is described in a 20-page Bulletin No. 103. In addition to describing the complete line of mountings available, the booklet also contains basic engineering information. Lord Manufacturing Co., Erie, Pennsylvania.

Photoelectric Cells. A booklet describing the principle of operation, characteristics, temperature factor, fatique effect, internal resistance, operating temperature, time lag, permanence, and spectral sensitivity. There is also a table of standard sizes. Emby Products Co., 1800 West Pico Blvd., Los Angeles, Calif.

THE STATES COMPANY

Woven Resistors for Heater Units

High Frequency Circuits and many other uses



Non-inductive
Flat - Thin
Easily mounted in groups or separately.

Ohm-spun

Resistors are Widely Used Where above Features are Essential.

New "RTS" Test Switches

—A "Pull-out" Switch *with spring return*

—A "Push-in" type *with spring return*

Potential or Current Units
"Make before break" or
"Break before make"
Momentary Contacts
1, 2 or 3 units operated by one knob.
Other types are described in Cat. #5, Sec. 1.
RTS Switches fit any test switch requirements where compact, positive switching in single or multiple units is desired.

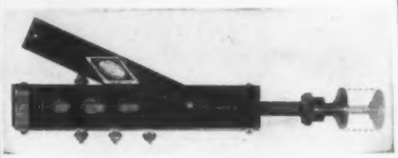

One hole mounting-Sealable

Phase Shifters

and Induction Regulators

For complete data see Cat. #1, Sec. B2 and Cat. #1, Sec. B4.

Tear Off and Mail Today

To THE STATES COMPANY
HARTFORD, CONN.
Send data.
Name ..... Title .....
Firm .....
City ..... State .....
ELEC.

AMP solderless wiring devices eliminate the faults of soldered connections and give assured service under conditions of the lowest operating currents and over the range from DC to the highest radio frequencies, as well as under normal current rating.

The design of these thoroughly engineered electrical devices assure economy, efficiency and convenience in production. A few outstanding characteristics are listed below:

1. **greater flexibility of installation**
2. **greater resistance to bending failure under repeated reversals of mechanical loading.**
3. **greater resistance to corrosion.**
4. **many types available with unique AMP "Diamond Grip" insulation support which protects wire, eliminates tape and insulation tubing illustrated at right. (Write for Bulletin #13)**

5. **facilitates insertion of wire.**
6. **more intimate electrical contact.**
7. **greater mechanical strength of the connection.**
8. **high safety factor for overload conditions.**
9. **greater tensile strength than required by government specifications.**
10. **quality of electrical joint can be determined by visual inspection.**

Aircraft-Marine Products, Inc., maintains a research and experimental laboratory for new devices and uses and for your special problems having to do with electrical connections.

AIRCRAFT-MARINE PRODUCTS INC
AMP
SOLDERLESS WIRING DEVICES

Write today for Bulletin #11_____ Complete description of AMP Solderless Wiring Devices

and Bulletin #13 describing "Diamond Grip"

AIRCRAFT-MARINE PRODUCTS, INC.
Dep't B • 286 N. BROAD ST. • ELIZABETH, N. J.

Backtalk

This department is operated as an open forum where our readers may discuss problems of the electronic industry or comment on articles which ELECTRONICS has published

I-F Stability

If the inductance of the i-f coils in an i-f stage having two double tuned transformers are too high, the i-f tube will oscillate as a tuned grid-tuned plate oscillator. The following formula gives the maximum values of inductance that can be used:

$$L = \frac{A^2\left(1 + \sqrt{\frac{16\pi\, fC g_m\, R_p^2}{A^2}}\right)}{16\pi^2 f^2 C g_m\, R_p Q}$$

where

Q = average Q of the coils in cans
R_p = plate resistance of i-f tube in ohms
g_m = mutual conductance of i-f tube in mhos
C = grid-to-plate capacity of i-f tube in farads
f = intermediate frequency in cycles/second
L = average inductance of coils in henries
A = phase shift factor depending on the coupling factor K (the average coupling of the transformers)

For $K = 1$ (critical coupling) $A = 2.52$
$K = 0.9$ (90% critical) $A = 2.44$
$K = 0.8$ (80% critical) $A = 2.4$
$K = 0$ $A = 2.$

A is obtained from:

$$A = \frac{(4X^3 + 1 - K^2) + 4K^2}{4X^2 + 1 + K^2}$$

where X is the solution of:

$$8X^3 - 4X^2 + 2X(1 - K^2) - (1 + K^2) = 0$$

Thus to determine values of A not given in the table above, substitute values of K in the cubic and solve for X. Then

Inductance of I-F Coils
At Which the I-F Tube Will Oscillate

Values of Maximum L in Millihenries for $Q = 100$

$B+$	Tube	$K = 1$ (critical coupling)	$K = .9$ (90% critical coupling)	$K = .8$ (80% critical coupling)
250	6K7G	1.42	1.37	1.34
100	6K7G	2.15	2.05	2.
250	7A7	1.43	1.38	1.35
100	7A7 12SK7G	2.24	2.15	2.1
90	1LN5 1N5	1.87	1.81	1.77
67.5	115	2.05	1.97	1.92
67.5	6SD7GT	1.38	1.33	1.31
67.5	7H7	0.805	0.776	0.762

B-I-W AIRCRAFT CABLES...

LIGHTING AND POWER CABLE
HIGH TENSION IGNITION CABLE
RADIO POWER AND CIRCUIT CABLE
MULTI-CONDUCTOR INSTRUMENT CABLE
SHIELDING BRAID AND BONDING CABLE

To all engineers working in the aircraft industry, we have to offer a complete selection of electric wires and cables made to the latest specifications.

In many cases our products are designed to meet the requirements of new instruments, devices or controls, using construction most suitable for lightness and serviceability.

Write for our catalog AM-1 and Coaxial Cable Bulletin

BOSTON INSULATED WIRE and CABLE COMPANY

Uphams Corners..... Dorchester, Mass.

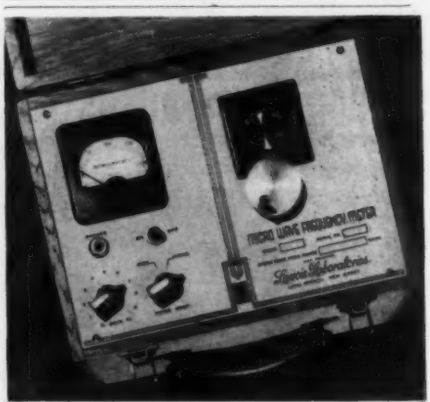

UHF and MICROWAVE PRECISION WAVEMETERS

- ***PORTABLE***
- ***BATTERY-OPERATED***
- ***ACCURACY 0.1%***

Models Available
100-4000 Megacycles
with 2 to 1 frequency
coverage on each Model.

Lavoie Laboratories

MICROWAVE EQUIPMENT

656-661 Broadway **Long Branch, New Jersey**

ELECTRICAL CONTACTS

by BRAININ

For your regular—and unusual requirements

Contact rivets in silver, platinum, palladium and their alloys, and other materials supplied to your specifications. Also, to meet today's requirements, we are expanding our field to take care of sub-assemblies using contacts.

We specialize in laminated sheet and wire, bimetals, composite rivets and screws. Write to Brainin for your contact requirements. Inquiries invited in reference to materials and designs. Prompt, confidential attention given to all communications.

THERMOSTATIC BIMETAL
PRECIOUS METAL PRODUCTS FOR ELECTRICAL MANUFACTURERS

C. S. BRAININ CO.

20 VANDAM STREET, NEW YORK, N. Y.

using this value of X and the value of K solve the equation above the cubic for A. About 20 percent should be allowed for being within regeneration limits.

In the table are values for 455 kc i-f calculated from the first formula for a $Q = 100$. For any other value of Q multiply by $100/Q$. Values are calculated on the handbook values of grid to plate capacity, mutual conductance and plate resistance.

J. J. ADAMS,
Zenith Radio Corp.

More on Conversion

Editor's Note—Late in March, ELECTRONICS wrote to many suppliers of components, materials and assemblers of communication and industrial electronic equipment to determine the impact of the stoppage of production of home radio receivers on April 22. The following letters are typical of the answers received:

"We are not doing any defense work. We have tried to get some of this work, visited Washington, but so far, no prints have been shown us.

"Our plant is ready for defense work, our people are ready, in fact they would like to work 48 hours per week without overtime if the Government would let them.

"We advised the Government that we were ready and if defense work could not be given us directly, they, the Government could have and use our plant for the duration without recourse or compensation, including the writer's service."

"For over a year we have tried to

• • •

RECORDING VOICES

The Australian Broadcasting Service recorded the voices of the defenders of Tobruk. The messages of the Scottish gunners who manned this anti-aircraft position will be relayed to Scotland. The men are shown listening to their own voices after they had been recorded

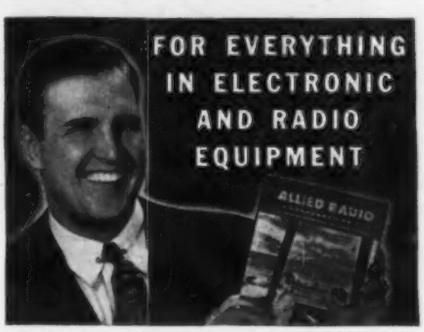

You Can Depend on ALLIED

FOR:
- Electronic Tubes
- Test Equipment
- Public Address
- Xmitting Gear
- Photo Cells
- Receivers
- 15,000 Parts, etc.

★

All the leading lines: RCA, National, Hammarlund, Mallory, Raytheon, Hallicrafters, Triplett, Thordarson, Bliley, etc.

★

Here's everything in Radio and Electronic equipment for engineering communications, laboratory and industrial application. You'll want the 208 Page ALLIED Buying Guide handy. For your FREE copy, write Dept. 24-F-2.

VAST COMPLETE STOCKS

IMMEDIATE DELIVERY

ONE DEPENDABLE SOURCE

GET YOUR 208 PAGE BOOK

ALLIED RADIO
833 W. JACKSON • CHICAGO

AC TO DC WITH BL RECTIFIERS

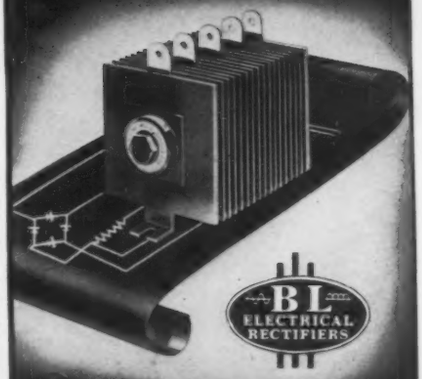

TO MEET YOUR SPECIFIC REQUIREMENTS

OVER twenty years of specialized engineering experience has served to make The Benwood Linze Company a Central Clearing House of information on Rectifiers and their applications.

A completely modern three story plant equipped with the latest production facilities is devoted to research, design and manufacture of selenium and copper sulphide rectifiers and rectifier transformer assemblies which incorporate these elements in addition to copper oxide and tube rectifiers. B-L rectifiers and assemblies are today serving America's Armed Forces and industry with service proved efficiency.

Now, with every thought concentrated on producing for America, the value of these years of experience is evident. If you have any problems involving conversion of electrical current from AC to DC, you will do well to join the hundreds of others who depend on the craftsmanship, engineering experience, and modern production facilities that B-L offers.

APPLICATIONS

Electronic Equipment
Communication Systems
Alarm Systems
Signal Devices
Photoelectric Cells
Electro-Magnetic Equipment
Radio Remote Control
Broadcasting

ASSEMBLIES

Fast Battery Chargers
Battery Boosters
Electroplaters
Cathodic Protection
Aircraft Engine Starters
Power Packs
Motion Picture Rectifiers
Voltage Adjusters

the BENWOOD LINZE CO.
ENGINEERS • MANUFACTURERS
1805 Locust St. • St. Louis, Mo.

Heroes All!
The defense of Bataan will go down in history along with the Alamo as one of our most heroic stands. Despite the impossibility of getting supplies or reinforcements they held their posts with a vengeance . . . the type of defense that we are proud our armed forces can always be counted upon to deliver.
Hallicrafters Sky Buddy (illustrated) in use at a former Bataan listing post.
the hallicrafters co.
CHICAGO, U. S. A.
Keep Communications Open

secure government work without success. Since our civilian business definitely ends this week, it was necessary either to close down or secure defense work, and in a last supreme effort we were fortunate in stumbling across a defense item. At the present time we are converting and by the first of next week we will be 100 percent on government work.

"Just for the sake of clarification: I should like to go on record as saying that the fact that we have not converted and have not been doing war work in the past is because we were utterly unable to obtain any kind of contract despite several trips to Washington, Fort Monmouth and Dayton in an effort to get something!

"We have been making strenuous and diligent efforts to obtain war production business for many months. As a matter of fact, long before the curtailment of the radio industry was even contemplated.

"We have a beautiful plant, occupying some 75,000 square feet of space, a trained personnel all of them adept and skillful in the handling of small assemblies, and we know that we could be of real service if given the opportunity to perform.

"We have been successful in lining up a few jobs for the Fall which will take about 35 percent of our plant capacity, but it is far from being enough work to keep our organization together, particularly from April 1st to September 1st. If there is anything that you people can do to call this to the attention of the proper people, we certainly would appreciate it."

• • •

RADIO DEVICE DIRECTS ARMY DOGS

A short-wave device for transmitting instruction by remote control to army dogs on the battlefield enabling them to locate wounded soldiers, carry messages and supplies. The dog carries a small receiver on his back, to which is attached a small circular aerial. The dog wears a small head set from which he hears the commands of his master. It takes three months to train a dog and ten days to train the man. Carl Spita, noted animal trainer, will submit this to U. S. Army shortly

EICOR

SPECIALIZATION

in the design and manufacture of rotary electrical apparatus has developed a high degree of accuracy in Eicor Products that makes them the accepted standard wherever such equipment is used.

In achieving this distinction, our personnel has gained the experience and confidence so necessary in meeting today's tremendously increased needs for Eicor equipment.

EICOR
EICOR, Inc., 1050 W. Adams St., Chicago, U.S.A.
Export: Ad Auriemo, 89 Broad St., New York

LOOK
TO
LINGO
FOR AM-FM
Lingo AM and FM radiators are creating new performance records throughout the broadcasting field. Improved designs and exclusive features are responsible for their high efficiency, unexcelled stability and low maintenance cost.
LOOK TO LINGO—for proven, factual information on modern antenna systems.
LINGO
VERTICAL
TUBULAR STEEL
RADIATORS
JOHN E. LINGO & SON, INC., CAMDEN, N. J.

RECENT U.S. PATENTS

Each week the United States Patent Office issues grants to many hundreds of inventions that pass the acid test of that office. A few of those relating to electronics are reviewed here

Non-communication Applications

Frequency Generator. A varying capacitor with a means to derive a signal from it. One capacitor is polarized with direct current and a high frequency is impressed upon the d-c polarizing potential. L. Hammond, March 2, 1940, No. 2,281,495.

Temperature Compensation. Means for temperature compensating a variable condenser throughout its capacity range, comprising a second variable condenser similar to and mechanically ganged with the first condenser, a fixed condenser having a temperature coefficient opposite in sign to that of the two variable condensers, connected in series with the second. The two series-connected condensers are in parallel with the variable condenser. K. D. Smith, Bell Telephone Labs, Inc., Sept. 24, 1941. No. 2,281,461.



Humidity Measurement. Combination of an elongated hygroscopic element expanding and contracting with changes in humidity, and a three element tube as a measuring device. E. A. Keeler, Brown Instrument Co., March 31, 1938. No. 2,280,241.

Welding Apparatus. Apparatus using electron tubes to control the spacing of the electrode in an arc welding apparatus as a function of the voltage between an electrode and the work. V. J. Chapman, G.E. Co., Aug. 9, 1940. No. 2,280,629.

Inspection System. A light sensitive system with a set-up responsive solely to the rate of change of illumination on the phototube. F. H. Gulliksen, WE&M Co., Sept. 7, 1939. No. 2,280,948.



Number Displaying Device. Use of a cathode ray tube in a character outline displaying apparatus. J. W. Bryce, I.B.M. Corp., April 10, 1940. No. 2,281,350.

Flaw Detection. A method for testing non-conductive material for flaws by subjecting the material to a high voltage discharge. Two means are provided for automatically checking or discontinuing the discharge at a flaw for a short interval, and establishing another current effective to prolong the interval for a predetermined short time after the checking or discontinuance of the discharge. L. J. Gorman and R. L. Morris, Consolidated Edison Co. Sept. 21, 1940. No. 2,280,119.

Precipitation Circuit. Electrical precipitation apparatus for cleaning gases, comprising the use of half wave rectifiers. H. J. White, Research Corp., Aug. 22, 1940. No. 2,280,330.

Tube Testing. Apparatus for simultaneously electrically treating and individually electrically testing a number of tubes. J. G. Pfeiffer, Western Electric Co., Dec. 1, 1939. No. 2,280,448.

Ultra High Frequency Apparatus

Generator. Frequency determining apparatus made of rod-like inductance elements parallel to each other, electrically connected to each other and having a balanced tuning condenser arrangement coupling one end together with shield surrounding the inductances. R. W. George, RCA. June 20, 1939. No. 2,277,638.



Feedback Balancer. In a high frequency relay system with receiving antenna connected to the input of an amplifier and a transmitting antenna con-

TIMING DEVICES

Cramer TIMERS

LATEST In RELAYS DESIGNED SPECIFICALLY for ELECTRONIC CIRCUITS

They possess everything you seek in this type of instrument,

RELIABILITY • APPEARANCE • SMALL SPACE •

Running Time Meters

Square or round meter type housing. Automatically and cumulatively register total operating time of plate and filament circuits. Obtainable in minutes or hours.

Ask for Bulletin F1

Time Delay Relays

Used in power supplies to provide an adjustable or fixed time delay between the closing of the filament and the application of the plate voltage.

Write for Bulletin F2

SAUTER Time Switches

The R. W. CRAMER COMPANY, Inc.

Specialists on Timers

P. O. BOX 3
CENTERBROOK, CONN.

SWITCHES

SAUTER

S. S. WHITE FLEXIBLE SHAFTS

For all POWER DRIVE and REMOTE CONTROL Uses

If you need flexible shafts for any application which rates a priority, let us know your requirements. Our production is now entirely for war work and is going full blast to supply our flexible shafts for their many applications in planes, tanks, ordnance, naval, signal corps and other war equipment and for portable tools and other production machinery. Even so, you can count on us for the fullest cooperation in meeting your needs. Write us.

If you want sample shafts for experimental purposes we'll be glad to supply them.

AT YOUR SERVICE
cooperation of our flexible shaft experts for working out actual applications. Send details.

DATA FOR ENGINEERS

The following bulletins will be mailed to you on request:

BULLETIN 1238 Flexible Shafts for Power Drives.
BULLETIN 38 Flexible Shafts for Remote Control.
BULLETIN 839 Flexible Shafts for Aircraft.

S. S. WHITE

The S. S. White Dental Mfg. Co.

INDUSTRIAL DIVISION

Department E, 10 East 40th St., New York, N. Y.

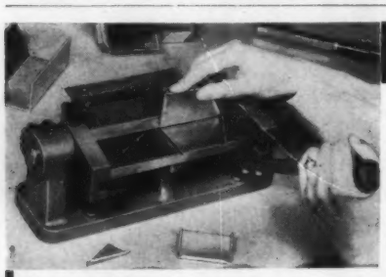

FORMING *WITHOUT* DIES!

Are you in a rush for some duplicated metal parts? Do you have experimental work? In many cases you can make the parts faster with the "Di-Acro" System, and avoid entirely the expense and delay of making dies. An almost unlimited variety of work can be rapidly done by the combined use of 3 Di-Acro Precision Units, — Shear, Brake, Bender.

Write for Catalog

New 32-page catalog "Metal Duplicating Without Dies" gives full details, shows many parts which can be made.

DI-ACRO PRECISION MACHINES

Di-Acro Brake No. 1 rapidly forms angles, channels, "Vees". Folding width 6". Brake No. 2, folding width, 12". Accurate to .001".

O'NEIL-IRWIN MFG. CO.
321 8th Ave. S. Minneapolis, Minn.

ADC

We Specialize in Transformers, Reactors, Filters (Electrical Wave) Jacks, Plugs and Kindred Items

Your Problems are Our Business, too!

AUDIO DEVELOPMENT COMPANY
2833 Thirteenth Avenue South, Minneapolis, Minnesota

nected to the output of the amplifier through coaxial transmission lines, with auxiliary electrodes within each of the transmission lines in adjustable relationship to the inner conductors, and an auxiliary transmission line connecting the auxiliary electrodes with means for adjusting the length of this auxiliary transmission line whereby a small amount of energy of predetermined phase and amplitude is introduced into the first transmission line from the second. F. H. Kroger, RCA. Jan. 31, 1939. No. 2,276,497.

Centimeter Wave Generator. Means for forming electrons from a gun into a beam, a hollow resonant electrode for shielding electrons from external fields, this electrode having an effective length equal to an integral number of half wave lengths of the oscillatory currents established therein, directing the beam



of electrons through the hollow electrode along its longitudinal axis and adjusting the velocity of the electrons so that the distribution of oscillatory potentials along the path of the electrode alters the energy of the electrons. E. G. Linder, RCA. June 29, 1939. No. 2,276,320.

Aircraft Radio Applications

Drift Corrector. Apparatus for use on a navigable vehicle comprising an energy collecting means having a normal angular relation to the source of radiated energy and to the longitudinal axis of the vehicle, means for automatically keeping the vehicle upon a predetermined heading, and responsive to deviations of the vehicle from the predetermined course for angularly displacing the collecting means from its normal relationship to the longitudinal axis of the vehicle. C. J. Crane and R. K. Stout, Dayton, Oct. 18, 1939. No. 2,280,117.

Glide Path. Method of guiding aircraft along a linear inclined path on approaching a field for landing by radiating from several points on the field to define in space the inclined plane in which the desired linear and inclined approach path is located, producing on the aircraft from the visual image of three spots in the relative relationship as viewed from the aircraft, of three points in the inclined plane, one point being the desired point of contact of the desired approach path with the landing field and the other points being above and symmetrically located with respect to the first point. I. R. Metcalf, Research Corp., July 26, 1938. No. 2,280,126.

Capacity Altimeter. An oscillator and a pair of capacitors connected to it for varying the amplitude of oscillation, the capacity of one condenser being a function of its altitude above ground, the capacity of the other being variable. F. H. Shepard, Jr., RCA, Nov. 30, 1938. No. 2,280,725. See also No. 2,280,109 on a beat frequency altimeter, A. A. Varela, Washington, D. C., Apr 7, 1941.

Guiding Beacon. Guiding an aircraft by producing two overlapping radiation patterns extending over a plane in phase opposition to one another and having a common plane of polarization substantially intersecting the first

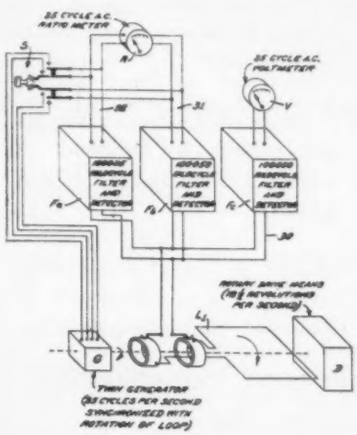

plane, receiving energy from the two patterns, and comparing the receiving energy from them to determine the first plane. A. G. Kandoian, International Tel. Development Co., Jan. 31, 1940. No. 2,280,514.

Communication Circuits

Noise Limiter. Between a source of signals and a receiver is connected a non-linear impedance acting as a transfer between signal and receiver. This impedance is biased whereby the transfer means is non-conducting for signals exceeding predetermined cut-off amplitudes. Frequency selective circuits associated with the non-linear impedance vary the cut-off amplitudes as a function of the signal frequency. Charles Travis, Philco. July 27, 1939. No. 2,281,395.

Alarm System. In a radio telephone system for transmitting from a central station to a movable vehicle voice messages concerning how the vehicle should be manipulated, a tone generator and a microphone at the central station, with switching means so that either may be used. A person on the vehicle may detect from the failure to receive either the tone frequency or a voice message the fact that the system may be out of order. V. C. Chappell, General Railway Signal Co., Aug. 21, 1940. No. 2,280,420. See also No. 2,280,421 to Chappell.

GENERAL CONTROL CO.
NEW **MASTER** CAM LEVER SWITCH

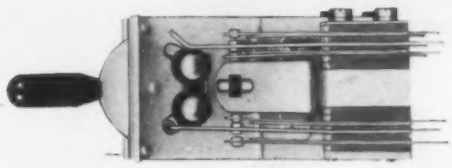

Seven years of building cam lever switches developed this new original MCL Switch featuring:

1. New single bolt assembly
2. New static shielding
3. New elimination of sliding friction
4. New all over tinned springs
5. New greater mechanical strength
6. New longer life construction
7. New gov't approved materials
8. New lower price

Fully interchangeable with your present GCL Switches. New catalog available showing complete mechanical and electrical specifications—Catalog No. MCL20

GENERAL CONTROL CO.
CAMBRIDGE, MASS.

Blackout Wanted in the drafting room!

You don't know what the word "black" means until you've put Eldorado to the test! The exclusive Typhonite process makes each of the 17 Eldorado degrees perfect, firm, opaque...gives the intensity of blackness you want! Improve your blueprints. Insist upon *Typhonite* ELDORADO!

Pencil Sales Department 59-J6
Joseph Dixon Crucible Co., Jersey City, N. J.

PERMANENT MAGNETS FOR WAR USE

DELIVERY
2 to 8 weeks

depending on design and priorities.
Send us your inquiries.

THOMAS & SKINNER STEEL PRODUCTS CO.
1127 E. 23D ST. INDIANAPOLIS, IND.

New DECADE AMPLIFIER MODEL 220

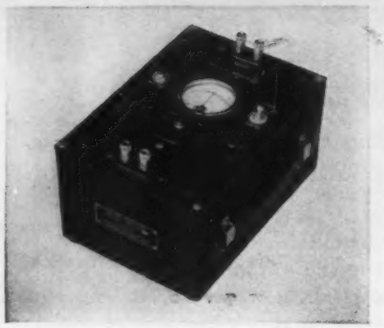

A highly stable amplifier giving gains of exactly 10 and 100 times. Operated by self-contained batteries. Through the use of special circuits the gain is independent of battery voltage, circuit constants and tubes within 2% from 10 to 100,000 cycles. Particularly useful with our Model 300 Electronic Voltmeter to increase its sensitivity, permitting voltage measurements down to 30 microvolts. Send for Bulletin 7.

SENSITIVE ELECTRONIC AC VOLTMETER

MODEL 300



10 to 150,000 cycles.

1 millivolt to 100 volts in five ranges (to 1,000 and 10,000 volts with multipliers).

Logarithmic voltage scale.

AC operation, 115 volts, 60 cycles.

Accurate and stable calibration.

Ballantine Laboratories, Inc.

BOONTON NEW JERSEY

Voltage Bridge. In a radio receiver in which there is a conductive connection between the power lines and the anode circuits of the tubes, a metal housing or chassis supports the receiver components and a means is provided for a lower impedance r-f path between the conductive connection and the chassis. Stray capacitance between the chassis and a high potential r-f portion of the receiver causes undesired currents to flow in the low impedance path. An impedance between the chassis and the r-f portion of the receiver causes equal and opposite currents to flow in the path, thereby preventing r-f voltages across the low impedance path. E. C. Freeland, Philco. Nov. 16, 1940. No. 2,281,488.

Relay Circuit. A rectified reaction tube circuit comprising a multigrid tube, a feedback circuit and a condenser in the feedback circuit for controlling the relation between the characteristic curve of anode current with respect to input to the circuit on increasing input and the characteristic curve for decreasing input. R. M. Kalb, BTL, Inc. April 26, 1941. No. 2,281,040.

Voltage Compensator. Circuit for compensating variations in voltage on



an r-f oscillator. R. E. Schock, RCA. August 20, 1938. No. 2,281,205.

Relay Circuit. In a telegraph system, two lines with means for impressing code telegraph signals on one of the lines and a thermionic repeater for relaying the signals to the other line. L. W. Franklin, Western Union Tel. Co., No. 2,280,308, Dec. 3, 1938.

Variable Band-Pass Receiver. A band-pass selector of adjustable bandwidth having a mean resonant frequency normally bearing a predetermined relation to the mean frequency of the carrier, the relation between the mean frequencies being subject to deviations which may be substantial as compared with the bandwidth of the signal, the selector initially having a pass band sufficiently wide to include the signal and the deviations, and means responsive to the mean frequency of the carrier signal for reducing deviations substantially to maintain said normal predetermined relation, and means for contracting the pass band of the selector in response to the translation of a carrier signal. H. A. Wheeler, Hazeltine Corp., Jan. 23, 1941. No. 2,280,139. See also No. 2,280,187 to N. P. Case, Hazeltine, July 10, 1940, on a system

VARFLEX

insulating tubing and sleeving has been specified for critical applications for twenty years.

VARFLEX pioneered and developed treated FIBERGLAS tubing and sleeving.

VARFLEX varnished tubing has always been recognized for its high quality.

SYNTHOLVAR extruded electrical tubing is furnished in proven and recognized formulations.

VARFLEX is the only manufacturer with a complete line of insulating tubing and sleeving.

VARFLEX CORPORATION

Rome, N. Y.

What Makes a Mailing Click?

Advertising men agree . . . the list is more than half the story. McGraw-Hill Mailing Lists, used by leading manufacturers and industrial service organizations, direct your advertising and sales promotional efforts to key purchasing power.

In view of present day difficulties in maintaining your own mailing lists, this efficient personalized service is particularly important in securing the comprehensive market coverage you need and want. Investigate today.

McGraw-Hill Publishing Co., Inc.

DIRECT MAIL DIVISION

330 West 42nd St., New York, N. Y.

for receiving a signal the amplitude of which may be less than that of an adjacent undesired carrier by means of an untunable broadly-responsive auxiliary signal-translating channel coupled to the main channel and including means for limiting to a uniform predetermined amplitude level all received carrier signals in the vicinity of and including the desired carrier signal plus other means selectively response to the desired carrier signal for deriving the carrier signal from the auxiliary channel and applying it to the main channel to develop therein a desired carrier signal, the amplitude of which is in excess of that of the undesired signals.

Coupling Circuit. A circuit for coupling two a-c input circuits of different frequencies to a common output circuit, comprising elements which present a high impedance to currents of the frequency of the input circuit be-



tween the terminals of which it is connected and a low impedance to currents of the frequency of the input circuit between the terminals of which it is not connected. C. D. Colchester and A. T. Starr, RCA, Nov. 5, 1940. No. 2,280,282.

Loop Circuits. The planes of a pair of loops of equal resistance and equal signal voltage pickup are arranged in a mutually perpendicular manner. Each loop is tuned to a desired signal frequency and the loops are reactively coupling loosely so that the signal current induced in one of the loops is in quadrature with the signal current induced in the other loop and means for applying the signal voltage developed across one of the loops between the control electrode and cathode of the tube. R. A. Weagant, RCA, July 2, 1940. No. 2,280,562.

Static Eliminator. Method of eliminating r-f disturbances while maintaining desired signal energy, including an antenna system and a counterpoise and coil connected to each with a movable

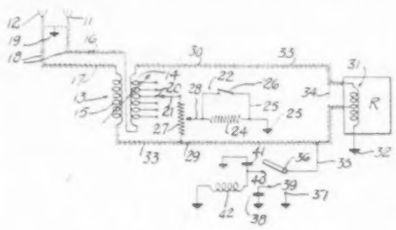

phase shifting coil connected to the counterpoise. The currents in the counterpoise are transmitted to ground through a variable resistor. Samuel Whisk, Brooklyn, N. Y. October 6, 1941. No. 2,280,461.

To former manufacturers of commercial

• BROADCAST RECEIVERS
TRANSMITTERS & ALLIED EQUIPMENT

Ferranti makes
TRANSFORMERS
for every Industrial and ELECTRONIC application

Quality transformers for every industrial, electronic, sound, communication, and laboratory use. — Air cooled transformers and reactors for every industrial application. Miniature aero transformers for aircraft and portable work. — High power plate and filament transformers. — Solenoids, relays. — Filters, equalizers, modulation sets and rectifiers . . . TO YOUR SPECIFICATIONS.



IF you are operating ALL OUT on war production for the Army, Navy, Air and Signal Corps, Coast Guard, Maritime Service, etc.

FERRANTI ELECTRIC

with increased manufacturing facilities, is in a position to make **Prompt Deliveries.**

Quantity Production on Quality Components at competitive prices . . . .

• IF YOU MANUFACTURE

Receivers, Compasses, Transmitters, Transceivers, Fire Controls, Walkie-Talkies, Test Apparatus, Direction Finders, Filters, Rectifiers, Power Supplies, Aero Equipment, Portable Systems, Marine Equipment, Measuring Apparatus, Communications Devices.

Consult Ferranti
FERRANTI ELECTRIC INC., RCA BLDG., NEW YORK, N. Y.

QUANTITY PRODUCTION at COMPETITIVE PRICES
Sixty Years of Development

NEW BULLETIN READY

Write for new Engineering Bulletin on the VIBROTEST . . . the insulation testing instrument having an amazing combination of advantages: (1) self-contained power source produces constant potential of 500 volts; (2) compact, readily portable; (3) easily read scale showing Ohms and Meghoms—also, A.C. and D.C. volts; (4) ingenious circuit design with standardization of synchronous vibrator; (5) can be operated with one hand, level or at an angle. New Bulletin—generously illustrated—gives specifications, uses, prices. Write for it today.

ASSOCIATED RESEARCH, INCORPORATED
427 SOUTH DEARBORN STREET • CHICAGO, ILL.

VIBROTEST

WAXES • COMPOUNDS *for* ELECTRICAL INSULATION

Zophar offers prompt service on Insulating Compounds for a wide variety of electrical applications, including:

. . . insulation for CONDENSERS, TRANSFORMERS, COILS, power packs, pot heads, sockets, wiring devices, wet and dry batteries, etc. Also WAX SATURATORS for braided wire and tape. WAXES for radio parts.
Special compounds made to your order.

ZOPHAR MILLS INC.
130-26th St. Brooklyn, N. Y.
FOUNDED 1846

FERRIS INSTRUMENTS

for RESEARCH • DESIGN AND PRODUCTION

• *Manufacturers of*

ULTRA HIGH FREQUENCY SIGNAL GENERATORS

STANDARD SIGNAL GENERATORS

CRYSTAL CONTROLLED SIGNAL GENERATORS

RADIO NOISE METERS

MICROVOLTERS*

Write for catalog E-4; illustrates and gives complete details and specifications for the complete line of Ferris Instruments.

FERRIS INSTRUMENT CORPORATION

Boonton • New Jersey

*Reg. U.S. Pat. Office

TAYLOR

LAMINATED PLASTICS

Vulcanized Fibre • Phenol Fibre

•

SHEETS, RODS, TUBES, FABRICATED PARTS

•

TAYLOR FIBRE COMPANY

Norristown, Pennsylvania

You Can Get A Priority On Time!

Bogen industrial sound systems save countless hours of precious time. Any man — anywhere in your plant — can be located in a second. An important message can be sent to all the workers while production continues at top speed. Air raid and fire alarms can be issued automatically — instantly.

Time is priceless today—and Bogen systems can save it for you. Let us show you how.

THE STANDARD OF PERFORMANCE

db

Bogen Sound Systems

DAVID BOGEN CO., Inc.

663 Broadway, New York City

Piezo Circuit. A network for producing exaggeration of the carrier with respect to the modulation side bands comprising a parallel resonant circuit tuned to the carrier frequency and arranged between cathode and a ground. The circuit is of low resistance and a piezo crystal is connected in shunt with

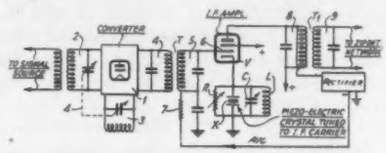

it and tuned to the carrier frequency. Degeneration is applied so that the amplitudes of the side band components are decreased uniformly with respect to the carrier frequency. W. vB. Roberts, RCA, Jan. 7, 1939. No. 2,280,-605.

Automatic Selectivity Control. In a superheterodyne, means for automatically adjusting the degree of selectivity of the i-f circuit including a device which is responsive to energy of a frequency equal to the difference between the i-f and the signal energy representative of an undesired adjacent channel frequency. Julius Weinberger, RCA, Nov. 25, 1935. No. 2,280,563.

Frequency Modulation. The following patents relate to various aspects of frequency modulation: No. 2,280,569 on a detector circuit passing waves of carrier frequency with maximum intensity, and attenuating waves of lesser and greater frequency as a function of their frequency spacing from the carrier frequency, and combining the total wave energy to produce a resultant wave of varying amplitude and constant frequency. W. G. Crosby, RCA. No. 2,280,570, also to Crosby, refers to a system for receiving f-m signals by a double channel system, one channel passing a wide band and the other a narrow band with means for varying the bandwidth of the system. No. 2,280,530 to G. Mountjoy, RCA, July 17, 1940, is on a detector for f-m waves comprising a pair of rectifiers, each rectifier having a resonant input circuit and an audio output circuit, the input tuned circuits being oppositely and equally mistuned with respect to the center frequency of the modulated waves. The output circuits are arranged in phase opposition, and the inputs are arranged in series with each other and with the rectifiers. The tuned circuits are connected by capacity to the rectifiers and the individual tuned circuits are sufficiently coupled together magnetically to cancel out the effect of the capacity coupling. No. 2,280,822 to C. W. Hansell, RCA, July 1, 1938, on a relaying system. A repeater comprising an oscillator and an amplifier excited by the oscillator has means for holding by the amplifier the oscillator frequency equal to the frequency of the repeated circuits. No. 2,280,707 to R. D. Kell, RCA,

DEFENSE REQUIREMENTS

ELECTRICAL
COIL WINDINGS
& TRANSFORMERS

Designed to meet specific requirements or to your specification.

COIL WINDINGS
ELECTROMAGNETS
SOLENOIDS
COIL ASSEMBLIES

PAPER INTER-LAYER SECTION
BOBBIN WOUND
FORM WOUND

Equipped for vacuum and pressure impregnation — varnish or compound.

An experienced organization at your service prepared to assist in design or cooperate on problems.

DINION COIL COMPANY
P.O. BOX D CALEDONIA, N. Y.

ARGON HELIUM KRYPTON
NEON XENON MIXTURES

Linde
RARE GASES
AND MIXTURES

. . . Spectroscopically Pure
. . . Easily removed from bulb without contamination

Scientific uses for Linde rare gases include—

1. The study of electrical discharges.
2. Work with rectifying and stroboscopic devices.
3. Metallurgical research.
4. Work with inert atmospheres, where heat conduction must be increased or decreased.

Many standard mixtures are available. Special mixtures for experimental purposes can be supplied upon request.

The word "Linde" is a trade-mark of

THE LINDE AIR PRODUCTS COMPANY
Unit of Union Carbide and Carbon Corporation
30 E. 42d St., New York UCC Offices in Principal Cities
In Canada: Dominion Oxygen Company, Ltd., Toronto

May 31, 1940, on a method of producing frequency modulation by generating frequency stabilized waves and applying a portion of the waves to establish saw-tooth waves which are combined with the desired modulation to produce pulses having an amplitude and a width corresponding to the modulation. The amplitudes of the pulses are limited to derive currents of square wave form, and the square waves are differentiated to form a series of pulses having a spacing corresponding to the modulation. These pulses produce waves of substantially constant mid-frequency and an extreme frequency corresponding to the applied modulation. No. 2,280,607 to W. vB. Roberts, RCA, Aug. 29, 1940, on an f-m receiver tuning indicator. A direct voltage component is produced in a discriminator network which is zero upon accurate adjustment of the tuning to the desired station. This direct current is used to provide a visual indication, the amount of which can be varied. No. 2,280,545 to R. E. Schock, RCA, June 18, 1940, on a frequency modulating detector comprising two rectifiers on each side of a push-pull circuit.

Automobile Radio System. A removable self-contained radio receiver including a storage battery and means for electrically connecting the set in the circuit with the car generator to cause both the set battery and the vehicle battery to receive charging current when the engine is running. A switch forms part of the set and is removable with it to permit charging current to flow to the set battery but not in a reverse direction. D. J. Barrett and L. G. Pacent, Sept. 11, 1940. No. 2,280,-465.

Wide Band Amplifier. An amplifier for producing uniform ratio between input current and output voltage and having resistance and capacity in shunt with the input to which the current is supplied. The current has frequencies extending over a wide band and having intensities only slightly above the noise level. In the intermediate frequency portion of the band above the carrier of the most intense noise the currents are attenuated without changing the characteristic relation between intensity of voltage on the resistance and capacity and the frequency in the high frequency portion of the band. At a later stage of the amplifier low frequency currents are attenuated to produce uniform amplification at all frequencies below said high frequency portion and thereafter accentuating voltages in the high frequency portion of the band by an amount sufficient to overcome the attenuation produced by the shunt resistance and capacity, said accentuation occurring at a point in the amplifier subsequent to a stage following the point where the low frequency accentuation occurs to avoid overloading the last stage with currents to be attenuated. D. E. Norgaard, G.E. Co., May 1, 1941. No. 2,280,532.

G.A.W.
CARBONYL
IRON POWDER

Manufactured by
GENERAL
ANILINE WORKS
435 Hudson Street,
N. Y. C.

SETTING
A NEW HIGH
IN
IRON CORE
PERFORMANCE

Available in three types, G.A.W. Carbonyl Powder — *combining high effective permeability and highest Q value*—is of increasing importance to leading core manufacturers supplying the carrier and high frequency fields where the highest efficiency is required.

Write for further information

Distributor of G.A.W.
Carbonyl Iron Powder:

ADVANCE
SOLVENTS & CHEMICAL CORPORATION
245 FIFTH AVENUE NEW YORK, N.Y.

audiodiscs

have consistently pioneered the major advances in recording-disc convenience, utility and performance. Here is the unparalleled record.

FIRST with a truly flawless surface — free from waves, swirls and thick-and-thin spots.

FIRST to provide ultra-high-frequency characteristics for perfect lifelike reproduction.

FIRST with engineered thread-action to facilitate effective control under any system.

FIRST to achieve complete freedom from deterioration—Audiodiscs do not dry out.

FIRST with glass-base recording blanks when aluminum Audiodiscs "went to war"

FIRST with a thin, flexible glass-base disc, completely interchangeable with metal-base types.

FIRST with all three drive-pin holes in glass discs, simultaneously eliminating chipping and breakage hazards.

FIRST with Safety Cartons for reshipping valuable glass-base Audiodisc recordings.

FIRST to provide special re-usable wood cases for shipping and storing, with full protection against dust and damage.

FIRST with a complete line of blanks—six types of Audiodiscs meet all recording and price requirements.

FIRST with *complete* national distribution—Audiodiscs are conveniently available everywhere

FIRST **IN THE MINDS OF RECORDING ENGINEERS**

•

RED LABEL • YELLOW LABEL • BLUE LABEL • MASTERS • REFERENCE

Call your jobber—or write for free folder, "Audiodiscs"

AUDIO DEVICES
INCORPORATED
1600 BROADWAY NEW YORK CITY

Industrial Applications

Temperature Control Apparatus. A Wheatstone bridge made up of negative and positive temperature resistance elements with a d-c amplifier across the bridge balance point which controls a heating element to raise the temperature in a chamber. V. B. Bagnall, AT&T Co. Aug. 15, 1940. No. 2,278,633.

Printing Press Control. A photoelectric registering system. Hermann Kott,

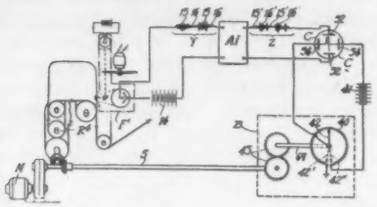

to Speedry Gravure Corp. June 2, 1938. No. 2,278,933.

Recording Apparatus

Magnetron Receiver. Method of using a magnetron in a superregenerative circuit by varying the shunt impedance

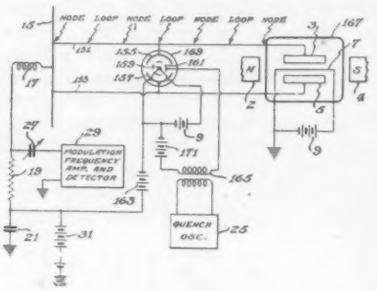

of a transmission line at a voltage loop at a quench frequency. R. A. Braden, RCA. Feb. 29, 1940. No. 2,277,841.

Sound Film Recording. Two patents, Nos. 2,274,529 and 2,274,530, to M. E. Collins, RCA, the first comprising means for continuously projecting a light beam on a motion picture film with a means to overmodulate a galvanometer to eliminate light beam from film, means for advancing the film, a second light source and means for periodically projecting the second light source on the film. The overmodulating means eliminates the first light beam during the advancement of a predetermined length of film, this length of film having images thereon made by the second light source. The second patent involves intercepting a certain frequency portion of a light beam and utilizing this portion to maintain the total light of the beam at a constant intensity.

Sound Film Projector. Mechanical equipment for moving sound film for television scanning. C. F. Mattke and R. V. Terry, BTL, Inc. Jan. 10, 1941. No. 2,275,540.

METAL SHIELDED WIRE

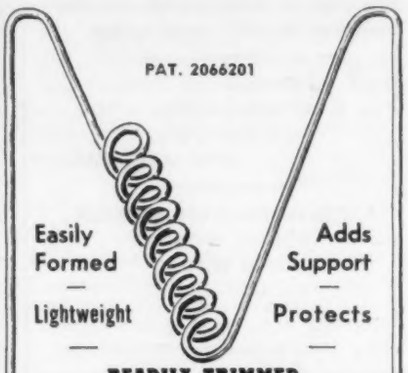

ELIMINATES ELECTRICAL INTERFERENCE, MOISTURE, ETC.

Let us solve your Shielding Problems

UNIFORM TUBES
SHURS LANE, ROXBOROUGH
PHILADELPHIA, PENNA.

IN THESE TRYING DAYS YOU CAN DEPEND ON TERMINAL

Yes . . . now more than ever, the radio industry is looking to us for Parts and Electronic Equipment. The reason for this lies in our ability to supply much needed material with utmost speed and maximum efficiency.

The largest stock in our history is available to manufacturers, Government Agencies, and other organizations engaged in war work.

In other words, *You Can Depend on Terminal* — Your Most Reliable Source of Supply!

TERMINAL RADIO CORP.
85 CORTLANDT STREET
New York City • WOrth 2-4416

Telautograph System. An electrostatic capacity at the receiver is varied as the scribing point of the receiver moves in one direction of a coordinate system, and means at the receiver for establishing the frequency of an alternating current by the capacity. Under

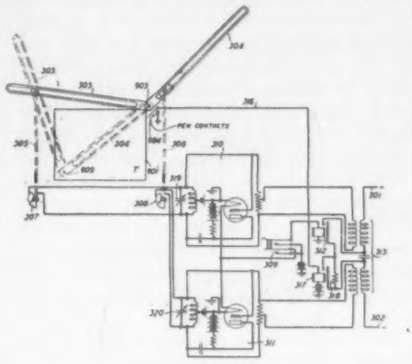

the control of this variable frequency a force for changing the capacity which is proportional to the instantaneous difference of a variable-frequency current from a transmitter and the frequency of alternating current established at the receiver. V. E. Rosene, BTL, Inc. Nov. 15, 1939. No. 2,274,638.

Sound Record. A negative sound film record is made on film and is then treated with a light sensitive dye. The dye in the areas not occupied by the sound wave envelope is then removed. E. W. Kellogg, RCA. Aug. 20, 1940. No. 2,268,752.

Microfacsimile System. Producing a series of picture signals from subject matter moved through the transmitter at a uniformly relatively slow rate, means for producing horizontal and vertical synchronizing signals and means for rapidly and cyclically scanning substantially each element of the subject matter to be transmitted at a relatively rapid rate in bi-dimensional directions so that each element of the subject matter is scanned a relatively large number of times during its passage through the transmitter to produce a series of picture signals, and for projecting the produced light images on a recording medium in minified form. A. N. Goldsmith, RCA. Aug. 22, 1939. No. 2,275,898.

Transmission System. Method of eliminating spurious additions to radio

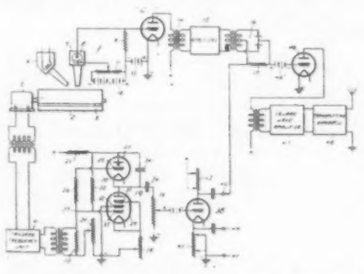

signals. D. R. Goodard, RCA, April 16, 1940. No. 2,274,829.

TIME-TESTED *veteran* IN

ELECTRICAL REMOTE CONTROL APPLICATIONS

Designed and made by the originators of the dial telephone system, the Automatic Electric's Class A "telephone type" relay has been used as standard in that service for a generation. And because the Class A relay has proved so dependable and durable, it is now providing these advantages in hundreds of industrial products important to the war program.

Only one of the scores of electrical control devices offered by Automatic Electric, the Class A relay can be supplied in a limitless variety of contact and coil combinations— for d-c or a-c operation, slow acting or quick acting, and with almost any desired contact load capacity.
If you are engaged in war production, write for a copy of our new catalog 4071-C.

AMERICAN AUTOMATIC ELECTRIC SALES COMPANY
1033 W. Van Buren Street, Chicago, Ill.

AUTOMATIC ELECTRIC
RELAY MAKERS SINCE 1898

You can write this ad . . .

Set down, if you will, all the qualities you would like in an instantaneous recording blank. . . . Make no compromise with quality. . . . We have an idea that you will find these exact things in the new

ADVANCE GLASS BASE
INSTANTANEOUS RECORDING BLANKS

STillwell 4-7837

ADVANCE RECORDING PRODUCTS CO.
36-12 34th STREET **LONG ISLAND CITY, N. Y.**

.... FOR ASSEMBLY WORK

the KNURLED heads make a DIFFERENCE

When production is rushed, you'll find the knurled heads mean speedier assembly. Fingers grip

UNBRAKO Reg. U.S. Pat. Off.

KNURLED SOCKET HEAD CAP SCREWS

without slipping so the screws can be turned faster and farther before a wrench is needed. Knurled heads give better appearance to finished product. These features at no extra cost. Sizes #4 to 1½" dia.

Where Ordinary Set Screws fail to hold

. . . apply "Unbrako" Self-Locking Hollow Set Screws with the knurled points. When tightened as usual, they dig in and stay put despite all vibration. Easy to remove and can be re-used. Send for Catalog 558.

Pat'd.

STANDARD PRESSED STEEL CO.

JENKINTOWN, PENNA. BOX 596

—BRANCHES—

BOSTON · DETROIT · INDIANAPOLIS · CHICAGO · ST. LOUIS · SAN FRANCISCO

MOLDED

S·S·White RESISTORS

The "All-Weather" Resistors



TYPE 65X

Actual Size

Other types available in the lower values

RESISTOR BULLETIN 37 GIVES FULL DETAILS...

It shows illustrations of the different types of S. S. White Molded Resistors and gives details about construction, dimensions, etc. A copy, with Price List, will be mailed on request. Write for it—today.

THESE widely used Resistors are favored because of their noiseless operation and durability and because they retain their values and characteristics under extremes of temperature, humidity and climatic changes.

STANDARD RANGE

1000 ohms to 10 megohms.

NOISE TESTED

At slight additional cost, resistors in the Standard Range are supplied with each resistor noise tested to the following standard: **"For the complete audio frequency range, resistors shall have less noise than corresponds to a change of resistance of 1 part in 1,000,000."**

HIGH VALUES

15 megohms to 1,000,000 megohms.

S. S. WHITE

The S. S. White Dental Mfg. Co.

INDUSTRIAL DIVISION

Department R, 10 East 40th St., New York, N. Y.

Monitoring System. Means for obtaining a penumbra shadow light beam from a source and for projecting this shadow through an optical system to a motion picture film with means for vibrating this shadow in accordance with a signal to be recorded. Simultaneously a second light beam is obtained from the source coaxially with the optical axis of the optical system for the observation of the condition and position of the incandescent element which provides the light for the penumbra shadow. M. T. Schomacker, RCA. Sept. 1, 1939. No. 2,270,350. See also No. 2,270,247 to C. N. Batsel dealing with the production of beams of a predetermined shape, the light forming means providing a linear relationship between the amplitude of the sound waves and the amount of said beam passing to the film over a range of signal amplitudes of the sound waves corresponding to 80 percent of the film range and a non-linear relationship between the amplitude of the sound waves and the amount of beam passing to the film over a higher range of amplitudes of the sound waves, this higher range being recorded in the remaining 20 percent of film range.

Sound Recording System. A movable armature actuates the mirror which vibrates a beam of light with respect to a film and surrounding this armature is an inductance with the means for impressing currents having varying amplitudes and frequencies on the inductance for moving the armature and the mirror and another inductance mounted on the armature having voltages generated in it directly proportional to the movements of the armature and the mirror. W. V. Wolfe, RCA. May 31, 1939. No. 2,270,367.

ANTENNA SYSTEMS

Vehicle Antenna. A self-contained resonant antenna utilizing a continuous portion of the structure of the vehicle as the antenna for operation at frequencies substantially independent of the equivalent electrical length of the portion of the structure utilized, containing a reactance adjacent to one end of the vehicle structure and electrically exposed to space at least in part, the reactance having a value such that the equivalent electrical length of the system is substantially equal to an even number of quarter-wavelengths of the desired operating frequency. Malcolm Bruce, Plymouth, Mass. March 21, 1941. No. 2,279,130.

Directive Antenna. A conductor positioned at an angle greater than zero degrees and less than 90 degrees to a frame perpendicularly related to the path of propagation of a wave and having a length substantially equal to a half wavelength of the desired wave plus the projection of the antenna on the path of the propagated wave. Edmund Bruce, B. T. L. Inc. Feb. 28, 1933. Re-issue No. 22,051.

SEARCHLIGHT SECTION

Wanted

ENGINEERS (2)

Connecticut war production manufacturer needs two engineers for permanent positions with following qualifications:

MECHANICAL ENGINEER

With several years' experience in manufacture of small precision parts; must be familiar with precise measuring equipment for quality control; knowledge of physical materials testing and writing of material specifications desirable.

DESIGNER

Graduate M. E. or E. E. with experience in small electromechanical and magnetic devices as applied to communication equipment; knowledge of application of plastics desirable.

State full particulars of education, experience and salary expected in first letter. Must be U. S. citizen. Our engineering staff knows of this advertisement. Write Chief Engineer,

P-334 Electronics

330 West 42 St., New York City

POSITION VACANT

RECENT ELECTRICAL ENGINEERING Graduates for test and installation of precision electro-mechanical ordnance apparatus. Position requires men with training and preferably some experience in the communications and electronics field. Location is in Metropolitan N. J. Area. In reply, state age, education, experience and when available. P-337, Electronics, 330 W. 42nd St., New York, N. Y.

POSITIONS WANTED

RADIO PATENT EXPERT and Electrical designer, proven merit. My designs have largest sales value of any advertised. R. G. Evans, 3945 Second, Detroit, Mich.

ELECTRONIC ENGINEER (E. E. and Physicist) highly experienced and capable, excellent background, numerous patents and achievements, many years connected with large concern, development, design, research, wants adequate position. PW-336, Electronics, 330 W. 42nd St., New York, N. Y.

WANTED

REWARD FOR INFRINGEMENT PROOF. Patent 2,107,135 covering "Distortion Neutralization" being infringed. 50% reward on net back royalties, plus 10% on future collections thereon. Reply guaranteed confidential. Attention Walter Steffa, Attorney, c/o Wilson Electrical Development Co., 154 W. Erie St., Chicago.

USED RECORDING EQUIPMENT, High Quality; Complete Assembly or Individual Components (Turntables, Feedscrews, etc.). 47 Oakview Drive, Sta. "C", Dayton, Ohio.

ENGINEER-DESIGNER WANTED

A client of ours — a long-established leader in his field — needs an electromechanical engineer qualified to handle development and design work on relays, timers and solenoids, and who has had practical production experience.

This is not a temporary "job." It is a position which, because it has been created for the purpose of looking to our client's future, should prove equally important to the future of the man who can fill it.

Proved design ability, based on a practical approach to the manufacturing problems involved, is of paramount importance. To the right man are offered free reign to initiative and ample opportunity for future development.

The company is located in Eastern Pennsylvania, does well over a million dollars annual volume, and will stand rigid investigation from any angle. All of its employes who might be interested know of this advertisement.

If you feel that you can fill the position, we suggest that you write us in detail. Correspondence will be treated with strictest confidence.

THE HARRY P. BRIDGE CO., *Advertising Counsellors*

1324 Walnut St., Box 12 Philadelphia, Pa.

WANTED
ENGINEERS
FEMALE

Mechanical and Electrical Engineers needed by well known large manufacturer of radio and communication apparatus. Fine opportunity in established engineering group for qualified candidates. Openings in physical and electrical laboratories on technical and special engineering tests, work on filters, equalizers, amplifiers and test set designs requiring good knowledge of fundamental circuits and electronics; also planning for manufacture of product, analysis of parts, machine and tool facilities, and preparation of manufacturing layouts.

Require engineering graduates of high standing from accredited engineering colleges; also will consider outstanding candidates with A.B. degree in mathematics and physics. Experience desirable but not necessary if recent graduate.

Write stating age, education, experience, place of birth, attach snapshot (not returnable). Box 655 Suite 1800, Times Building, New York.

SEARCHLIGHT SECTION

(Classified Advertising)

EMPLOYMENT • BUSINESS EQUIPMENT—USED OR RESALE

OPPORTUNITIES

RATES

UNDISPLAYED: 10 Cents a Word; Min. $2.

DISPLAYED: $6.50 per inch.

Contract rates on request.

FOR SALE—TRANSMITTER

Used as 500 watt experimental Television Transmission—Can be easily modified as 1000 watt broadcast transmitter (output now uses 4—833 tubes). Excellent condition. Complete with power supply tubes, meters, etc. Also other equipment—four Baird (British) Electron Multipliers, Cathode Ray Tubes—Transformers, etc. Offers to

FS-317, Electronics, 330 W. 42 St., N. Y. C.

DEPENDABLE

Used

ELECTRONIC TUBE EQUIPMENT

Complete line of used equipment for the manufacture of Radio Tubes, Neon Tubes, Incandescent Lamps, etc. Write for Bulletin showing 25 to 70%

CALLITE TUNGSTEN CORPORATION

formerly Eisler Electric Corp.

534 39th Street, Union City, N. J.

VACUUM PUMPS

For sale about 50 small mechanical compound vacuum oil pumps — price $66.00 each.

10 larger size pumps — $95.00 each.

All pumps brand new and will pull to one micron.

Tube Light Engineering Co.

427 West 42nd St. New York City

BEST QUALITY, USED ELECTRON TUBE MACHINERY

Equipment for the manufacture of all kinds of electron tubes, radio tubes, incandescent lamps, neon tubes, photo electric cells, X-ray tubes, etc.

AMERICAN ELECTRICAL SALES CO., INC.

65-67 East 8th St. New York, N. Y.

NOTICE

OLD TRANSMITTING TUBES ARE VALUABLE

Let us help solve your tube problem. We can rebuild most any tube from 250 watts to 20 K.W.

Freeland & Olschner

922 Howard Ave. New Orleans, La.

GET THE COMPLETE TECHNICAL RADIO BACKGROUND

most in demand today *under this attractive offer*

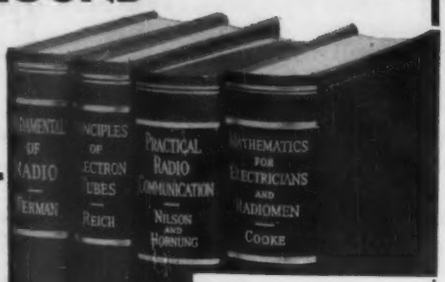

SAVE OVER 10% *in adding these standard books to your library*

Here is a library of books that brings you advanced radio engineering knowledge in the form in which you can most readily assimilate it and put it to use. The books were carefully selected from among standard McGraw-Hill works to give the most complete, fundamental coverage possible, in a small number of concise, compact, reasonably priced volumes. Use these books to bridge the gap between your own radio training or experience and more advanced, engineering command of the subject—the genuinely technical knowledge that best meets today's practical needs.

The New . . .
RADIO TECHNICIANS' LIBRARY

Full of definitions, descriptions, principles, formulas, data, methods, applications, etc., relating to:

—fundamental components of a radio system
—circuit elements
—fundamental properties of vacuum tubes
—thermionic emission
—glow- and arc-discharge tubes
—amplifiers
—modulation
—detection
—electron tube instruments
—rectifiers and filters
—dynamo-electric machinery and meters
—storage batteries
—radio transmitters
—ultra-high-frequency circuits
—marine transmitters
—low-power telephone and telegraph transmitters
—radio receivers
—antennas
—radio aids to navigation
—television
—acoustics
—control-room equipment and operation
—direct-current electricity and magnetism
—alternating-current electricity
—mathematics for electricians and radiomen
—etc., etc.

comprised of these 4 volumes:

Terman's FUNDAMENTALS OF RADIO

Reich's PRINCIPLES OF ELECTRON TUBES

Nilson and Hornung's PRACTICAL RADIO COMMUNICATION

Cooke's MATHEMATICS FOR ELECTRICIANS AND RADIOMEN

2213 pages, 1332 illustrations

In two of these books widely-used advanced engineering texts have been abridged, to cover the most fundamental aspects of tubes and circuits and their applications, but in the simplified form suited to introduce the man of limited radio and electrical training to these subjects. Another volume further applies these fundamentals to practical communication apparatus, completing a view of radio with which you can solve the technical problems met in a wide variety of situations. The fourth book gives you, at the same time, a progressive command of the radio and electrical mathematics, from arithmetic to advanced principles necessary in using the formulas and computations of advanced technical work.

SPECIAL LOW PRICE EASY INSTALLMENTS

Bought separately, these books would total $16.25 in price. Under this special Library Offer you save $1.75 of this amount, get all four books at once, and pay for them over an extended period. Get these advantages by deciding now to add these volumes to your radio library. Mail coupon today for 10 days' free examination.

10 DAYS' FREE EXAMINATION

McGraw-Hill Book Co., 330 W. 42nd St., N. Y.

Send me Radio Technicians' Library for 10 days' examination on approval. In 10 days I will send $2.50 plus few cents postage, and $3.00 monthly until $14.50 is paid, or return books postpaid. (We pay postage if you remit with first installment.)

Name .....

Address .....

City and State .....

Position .....

Company ..... L. 6-42

Antenna Coupling System. Coupling an antenna to a coaxial cable characterized by the fact that the antenna is formed by a conductor immersed in a tubular end portion of the inner conductor of the cable and protruding to such an extent beyond the end of the cable so that the ohmic series component of the antenna impedance at the entrance of the cable is equal to the wave resistance of the cable. The energy line formed by the inner conductor and the part of the antenna conductor which is immersed in the inner conductor is tuned by means of a movable connection to such a length that the wattless component of the antenna impedance is compensated. Werner Buschbeck, Berlin; to Telefunken. March 28, 1941. No. 2,278,531.

Multiple Antenna. Conductors arranged with their length parallel to the generatrix of the surface of a solid cone of revolution, means for energizing the conductors at their most closely adjacent ends and terminating the conductors at the other ends so that a traveling wave is set up along the conductors such that the instantaneous phase relationship of energy in the conductors progressively advances around the surface whereby a rotating field of radiation is established. Wilhelm Peters, Telefunken. No. 2,278,560. Sept. 30, 1939.

Repeater. In a repeater an antenna including a wave directive structure and means for eliminating radiation from the edges of such structure including a resonant structure tuned to offer a high impedance to the operating frequency of the antenna at the edge. N. E. Lindenblad, RCA, June 30, 1939. No. 2,281,196.

Wave Guide. Antenna comprising at least one conducting surface and serving as transmitting and receiving antenna and a conducting tube coupling the transmitter and receiver to the antenna, the receiver and transmitter being placed inside this conducting tube. W. Dallenbach, Berlin, July 12, 1938. No. 2,281,274.



Short Wave Antenna. Antenna for decimeter wave lengths comprising several radiator systems in superposed relationship spaced a distance apart equal to a multiple of the wavelength and mounted above ground a distance equal to a large multiple of the spacing

CONTACTS

FOR THE FIELD OF ELECTRONICS

We manufacture a complete line of equipment

SPOT WELDERS, electric, from ¼ to 500 KVA
TRANSFORMERS, special and standard types
INCANDESCENT LAMP manufacturing equipment
FLUORESCENT TUBE MAKING EQUIPMENT
ELECTRONIC EQUIPMENT, vacuum pumps, etc.
WET GLASS slicing and cutting machines for laboratory use
GENERAL GLASS working machines and burners
COLLEGE GLASS working units for students and laboratory
AC ARC WELDERS From 100 to 400 Amps.

EISLER ENGINEERING CO.
751 So. 13th St. (near Avon Ave.) Newark, New Jersey

SIGNICO

SIGNAL & INDICATOR PILOT LIGHTS
for all electrical devices.

WRITE FOR CATALOGUE showing a complete line of assemblies for all purposes.

SIGNAL INDICATOR Corp.
140 CEDAR ST. NEW YORK, N. Y.

MICROMETER FREQUENCY METER for checking transmitters, from 1.5 to 56 mc., within 0.01 per cent.

LAMPKIN LABORATORIES
Bradenton, Fla., U. S. A.

LECTROHM
Vitreous Enameled
RESISTORS

A complete range, from 1 to 200 W. wound with highest grade resistance wire. Tolerances plus or minus 5% (closer tolerances, if needed).
Wound on low loss ceramic cores. Mounting legs furnished when requested.

SEND FOR SAMPLES
Give complete data regarding resistance, maximum current, voltage drop required and mounting space available.

LECTROHM, INC.
5131 WEST 25TH PLACE
CHICAGO (CICERO P.O.) ILL.

HARVEY RADIO CO.
103 W. 43 ST. • NEW YORK, N. Y.

HARVEY RADIO LAB'S, Inc.
Manufacturers of Radio Transmitters
ELECTRONIC APPARATUS
447 Concord Ave., Cambridge, Mass.

CRYSTALS *by*
HIPOWER

The Hipower Crystal Company, one of America's oldest and largest manufacturers of precision crystal units, is able to offer the broadcaster and manufacturer attractive prices because of their large production and the exclusive Hipower grinding process. Whatever your crystal need may be, Hipower can supply it. Write today for full information.

HIPOWER CRYSTAL CO.
Sales Division—205 W. Wacker Drive, Chicago
Factory—2035 Charleston Street, Chicago, Ill.

TRANSFORMERS in a hurry ?
Thordarson - Kenyon Stancor - U.T.C. - etc. **IN STOCK ! !**
HARRISON RADIO CO.
12 West Broadway • New York City
Phone WOrth 2-6276

FINE RIBBONS
of Tungsten and Molybdenum
Molybdenum in widths .006" to 1" in thickness to .0005"
Tungsten Ribbon to specification
H. CROSS
15 Beekman St. New York

LOUDSPEAKERS to ARMY & NAVY Specs.
are all part of our regular daily routine

Today war needs have caused an increase in the variety of speakers we manufacture.

New mounting means are required on every Army & Navy specification.

Our engineering department is well equipped to handle your special problems in time to have them ready "yesterday".

UNIVERSITY LABORATORIES
208-225 Varick St. N. Y. C.

Quick ANSWERS to your business problems...

MISCELLANEOUS business problems are daily being solved quickly and easily by the use of the Searchlight Section of this and other McGraw-Hill publications.

The Searchlight Section is classified advertising; you can use it at small cost, to announce all kinds of business wants of interest to other men in the fields served by these publications. It is the regular meeting place of the man with business needs and the men who can fill those needs.

When you want additional employees, want to buy or sell used or surplus new equipment, want additional products to manufacture, seek additional capital, or have other business wants—advertise them in the Searchlight Section for quick, profitable results!

Departmental Staff
McGRAW-HILL PUBLISHING CO., INC.
330 West 42nd Street, New York City

SEARCHLIGHT
(Classified Advertising)
SECTIONS
are found in these
McGRAW-HILL
Publications

American Machinist
Aviation
Business Week
Bus Transportation
Chemical and Met. Engineering
Coal Age
Construction Methods
Electrical Contracting
Electrical Merchandising
Electrical World
Electronics
Engineering & Mining Jour.
Engineering News-Record
E. & M. J. Markets
Factory Man. & Maintenance
Food Industries
Power
Product Engineering
Textile World
Transit Journal

ELECTRON TUBE MACHINERY
of every type,—standard, and special design
KAHLE ENGINEERING COMPANY

Specialists in Equipment for the Manufacture of Radio Tubes, Cathode Ray Tubes, Fluorescent Lamps, Incandescent Lamps, Neon Tubes, Photo Cells, X-Ray Tubes and other glass or electronic products, on production or laboratory basis.

1307-1309 Seventh St., North Bergen, N. J.

A BETTER JOB with increased pay is within the grasp of every radioman who has the ambition and courage to start training now for greater efficiency today and security tomorrow.

You realize, of course, the tremendous opportunities that exist in radio today. You must be aware of the unprecedented demand for highly qualified, technically trained radiomen. But, only the BETTER jobs are open to such men!

—If you now hold a commonplace job in radio . . .

—If you hold a temporary job today and long for a permanent job for the future

—If you have the ambition and desire to hold a position of responsibility with higher pay . . .

. . . then a CREI home study course in Practical Radio Engineering will help you to acquire the necessary technical knowledge and ability which is demanded by the better, higher-paying positions in technical radio.

For more than 15 years the high calibre of CREI training has been recognized by engineers as worthwhile training at a cost within the reach of every radioman. That's why CREI has always been proud to say, "Ask any Radio Engineer!"

These facts are important to you—and to every man who is seeking advancement in his chosen profession. We will be pleased to send you our catalog and pertinent facts upon request.

CAPITOL RADIO ENGINEERING INSTITUTE

E. H. RIETZKE, *President*
Home Study Courses in Practical Radio Engineering for Professional Self-Improvement
Dept. E-6, 3224 — 16th Street, N.W. WASHINGTON, D. C.

Contractors to the U. S. Signal Corps—U. S. Coast Guard
Producers of Well-trained Technical Radiomen for Industry

between the systems, the systems being energized in an opposing phase relationship. W. Ilberg, Telefunken, April 12. 1941. No. 2,280,235.

Antenna. A short wave antenna comprising a pair of L-shaped con-



ductors like the illustration. De Witt R. Goddard, Nov. 26, 1938. No. 2,281,-429.

TELEVISION

Receiving System. A picture scanned sequentially at a certain frame frequency, the receiver comprising a cathode-ray set-up for reproducing the picture and a second cathode ray for reproducing the picture in superimposed relation to the first picture utilizing a picture storage tube comprising a double-sided mosaic. G. L. Beers, RCA. Feb. 23, 1940. No. 2,273,172.

Electron Image Amplifier. An apertured insulated grid and a means to project a flood of electrons through the grid, means to produce on the grid electrostatic charges representative of a picture and a target element located on the side of the apertured grid opposite the source of electrons. P. T. Farnsworth, July 6, 1937. Re-issue No. 22,009.

Projection System. The target area in a cathode-ray tube is scanned electrically and cyclically with a modulated beam of electrons at a predetermined rate. Polarized light is intermittently projected against the unscanned surface of the target, the intermittent rate of projection being greater than the scanning rate and bearing a whole num-



ber ratio with respect thereto. Means including a projection lens for directing the light reflected from the target upon an observation screen. Manfred von Ardenne, Berlin. March 18, 1940. No. 2,276,750. See also Nos. 2,277,007–2,277,008, inclusive on projection apparatus, also to von Ardenne.

Professional Services

STANLEY D. EILENBERGER
Consulting Engineer
Complete Laboratory and Shop Facilities
General Electronics Communications Electro Biology Patent Development
6309 27th Ave. Kenosha, Wis.
Telephone 2-4213

INTERNATIONAL ELECTRONICS, INC.
Special Instruments, Equipment and Methods to control gauging, welding, heating, communications, signaling, safety, inspection, color and testing. Quality control and cost reduction for mechanical, electrical, metallurgical and chemical industries.
Rockefeller Center New York City
Telephone CIrcle 6-8494

HAROLD J. McCREARY
Mem. A.I.E.E. & W.S.E.
Consulting Engineer
Laboratory Facilities
Research, Development, Design, Factory Practice, Patent Studies
Electronics, Television, Radio, Railroads Signaling, Telephony
105 W. Adams St. Phone STate 4003 Chicago, Ill.

JOSEPH RAZEK, PH.D.
Consulting Physicist
Electrical and Mechanical Engineering Problems
Instruments and Control Devices Electronics
Specialist in Colorimetry, Spectophotometry and Industrial Color Control
Laboratory and Shop Facilities
430 Greenview Lane Llanerch, Pa.

J. ALBERT STOBBE
Consultant
Electronics and Communications
63 Wall Street New York City

Now Available
U-H-F TECHNIQUE

The demand for extra copies of the U-H-F TECHNIQUE Section of April ELECTRONICS has been so great that we have put it in covers, now available in any quantity.

Already many copies have gone to schools and colleges, to Government departments—wherever the need for concentrated theoretical and practical material on this vitally important subject exists.

Contents:—
1. Radiating Systems and Wave Propagation
2. Generators for U-H-F Waves
3. U-H-F Reception and Receivers
4. Wide Band Amplifiers and Frequency Multiplication
5. Measurements in the U-H-F Spectrum

PRICES: 1-25 copies, 50¢ each; more than 25 copies, 35¢ each. Please send cash if 25 copies or less.

Editorial Department
ELECTRONICS

NOW . . . you can secure the mathematical background you need

for the solving of everyday electrical and radio problems

Radiomen and electricians know that the language and the habit of mathematics are essential to them for real grasp of, and progress in their chosen field. They know that mathematics is a tool for them that they are helpless without.

Now out of the U. S. Navy Radio Materiel School at Anacostia Station comes a complete home-study textbook that is so thorough, so careful in its explanations, so detailed in its examples *that any reader "who can perform arithmetical computations rapidly and accurately is capable of mastering the principles laid down in this text.*

JUST OUT!

MATHEMATICS FOR ELECTRICIANS AND RADIOMEN

By NELSON M. COOKE
Chief Radio Electrician, U. S. Navy
Member, Institute of Radio Engineers
604 pages, 6 x 9, $4.00

This book teaches you mathematics from elementary algebra through quadratic equations, logarithms, trigonometry, plane vectors and elementary vector algebra with direct applications to electrical and radio problems. It teaches you how to apply this mathematical knowledge in the solutions of radio and circuit problems. In other words, it gives you the grasp of mathematics you need and then shows you how to use your knowledge.

Keep these 3 points in mind

- gives you 600 illustrative problems worked out in detail;
- gives over 3000 problems for practice, with answers so you can check your work;
- based on more than 8 years' experience teaching mathematics to U. S. Navy electricians and radio operators.

10 DAYS' FREE EXAMINATION

McGraw-Hill Book Co., 330 W. 42nd St., New York

Send me Cooke's Mathematics for Electricians and Radiomen for 10 days' examination on approval. In 10 days I will send you $4.00 plus few cents postage, or return book postpaid. (We pay postage if remittance accompanies order.)

Name .....
Address .....
City and State .....
Position .....
Company ..... L. 6-42

Supersonic System. A supersonic wave light modulating device and a light source for illuminating the device plus means for applying picture signals to produce in this device a train of moving supersonic waves modulated in amplitude in accordance with the signals with means for forming optical and electron images. A. H. Rosenthal, New York. No. 2,270,232. Jan. 12, 1939.

Television and Cathode-ray Circuits

Signal Producing System. In a television system, a cathode-ray image-reproducing tube having an apertured grid with one surface of dielectric material and an opposite surface of secondary electron-emissive material. The surface is scanned with a signal-modulated beam to produce a charge image on the surface, and upon the other surface of the grid is directed an electron stream for developing a source of low voltage electrons of uniform density and of a cross-sectional area comparable to the area of the grid. Means for physically blocking the direct path of electrons of the stream through the grid, whereby the density of the electron stream through the grid is space-modulated by the charge image on one surface, and means for utilizing the modulated electron stream to produce a visible image. R. C. Hergenrother, Hazeltine Corp., Sept. 30, 1939. No. 2,280,191.

PURCHASING AGENTS and ENGINEERS!

★ HERE IS YOUR COMPLETE ★

Source of Supply

for ALL STANDARD

RADIO PARTS

and ELECTRONIC EQUIPMENT

★

GREATEST STOCK EVER IN RADIO HISTORY!

CONDENSERS • RESISTORS
TUBES • METERS • TRANSFORMERS
SWITCHES • RELAYS • WIRE
TEST INSTRUMENTS
PLUGS • JACKS • PANELS, etc.

Write us for complete information on any standard nationally-advertised product.

WE HAVE A LIMITED SUPPLY OF

TUBES

R.C.A. • G.E. • GAMMATRON
TAYLOR • EIMAC • HYTRON
RAYTHEON • SYLVANIA

It is quite possible that the tubes you urgently require may be right here in our stock. Drop us a line or phone us. We shall be glad to fill all priority orders to the best of our ability.

For *IMMEDIATE SERVICE*
Telephone BArclay-7-1840
New York's Oldest Radio Supply House

SUN RADIO CO.
212 FULTON ST.
NEW YORK, N. Y.

PANORAMIC RADIO*

Heterodyne Spectroscopes

Ideal for Fast accurate

CRYSTAL TESTING

- Quicker visual indication of frequency of crystal under test.
- Shows 50 kc to zero beat on either side of zero.
- Indicates crystal activity and frequency simultaneously.
- Indicates spurious response.
- Compares MANY crystals simultaneously.
- Automatically indicates multiple crystal behavior under temperature run.

Ideal for F M Transmitter

TESTING AND MONITORING

Gives continuous visual indication of:

- All sidebands of transmitter, on calibrated frequency scale.
- Mid-frequency and drift.
- Percentage modulation.
- Residual amplitude modulation.
- Modulation distortion.
- Spurious responses.

Sideband Resolution adjustable 1.5 kc to 5 kc. Available in universal or specific frequency ranges.

*Registered in U. S. Patent Office

Write for Free Bulletin of Information

PANORAMIC RADIO CORP.
242-250 W. 55th ST., NEW YORK CITY
Phone: Circle 6-9440 Cable: Panoramic, NewYork

Canadian Rep.
CANADA MARCONI CO. LTD.,
Montreal, Canada

AUDAX

"RELAYED-FLUX" Microdyne

"The Standard by Which Others Are Judged and Valued"

JUST as ability to reach high "C" does not mean a quality voice,—so wide range by itself, in a pickup, does not mean quality performance. It is the all-important factor of "VIBRATORY-MOMENTUM" that determines quality. Not only does V-M control quality, but is also a serious factor in record wear. Needle pressure, needle impedance, etc., are comparatively secondary.

The sharp clean-cut facsimile performance of MICRODYNE—regardless of climatic conditions—is a marvel to all who have put it to the only test that really counts . . . the EAR test. . . . All this bears out the contention of leading scientists that *only* the INDUCTOR PRINCIPLE makes possible high quality results—and that means MICRODYNE.

WITH OUR COMPLIMENTS
A copy of "PICKUP FACTS" is yours for the asking. It answers many questions concerning record reproduction.

Pickup List Prices
$14.50 to $198.00
HIGH FIDELITY CUTTERS
List to $150.00

If your dealer is unable to supply the Microdyne you want, you may order direct from us.

AUDAK COMPANY
500 Fifth Avenue New York City
[In Chicago, 'phone: Webster 4840]
"Creators of High Grade Electrical and Acoustical Apparatus since 1915."

Synchronizing-Signal System. In a synchronizing-signal separating apparatus energized by a composite signal including line-synchronizing and field-synchronizing pulses for each field-underlap interval of the same polarity as, by having a greater duration than the line-synchronizing pulses, an integrating circuit responsive to a predetermined one of the field-synchronizing pulses of each field-underlap interval and unresponsive to the line-synchronizing pulses means for deriving a sensitizing signal initiating at the trailing edge of each predetermined field-synchronizing pulses, plus means responsive jointly to the sensitizing signal and to the field-synchronizing pulse for deriving a control signal. J. C. Wilson, Hazeltine Corp., July 13, 1940. No. 2,280,181.

Generator. System for producing deflection voltage variations for a magnetically deflected cathode-ray beam having saw-tooth wave characteristics. E. L. C. White, E&MI, Ltd., May 15, 1940. No. 2,280,990.

Oscillator Drift Compensation. In combination with a resonant circuit varying in frequency by virtue of temperature effect on the circuit reactance and an electron tube having a cathode and two cold electrodes, an alternating voltage is applied across the circuit between the cathode and one electrode and a phase shifter connected with the other cold electrode develops

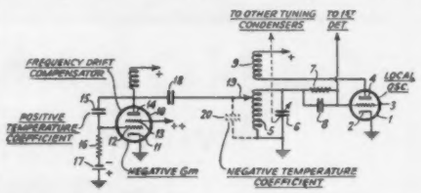

from this voltage a second voltage in phase quadrature with the first. The phase shifter includes a reactive element has a temperature coefficient of predetermined signal so related to the mutual conductance of the tube that a reactive effect is produced between one electrode and cathode which has a temperature coefficient compensating frequency variation. C. N. Kimball, RCA. No. 2,280,527, Sept. 7, 1940.

Electron Device. An electrical condenser comprising conducting elements separated by an insulating gap, and an electron beam normally separated from contact with the gap and at times moving the beam to such a position as to render the gap conductive. V. K. Zworykin, WE&M Co., Nov. 26, 1938. No. 2,280,877.

Scanning System. A cathode-ray beam scans a picture field, means for deflecting the beam in two directions, a high frequency oscillator supplying one of the deflecting elements, a low frequency oscillator supplying the other of the deflecting elements, said oscil-

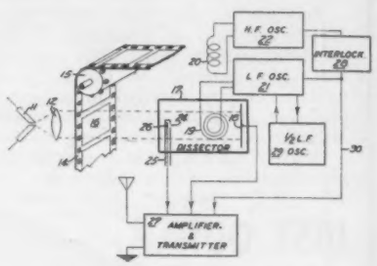

lators having commensurable frequencies, means for interlocking the frequencies, with an additional oscillator operating at a frequency lower than the said low frequency oscillator connected to the output of the low frequency oscillator. P. T. Farnsworth, 1934. No. 2,280,572.

Negative Transconductance Device. Two stages having a common source of anode voltage, control means connected to the grid of the first stage, and a direct connection from the grid of the second stage to a junction between the load resistor and the source of voltage. W. B. Roberts, RCA, Dec. 20, 1939. No. 2,280,987.

Response Adjustment. A multi-section filter having a rising frequency response characteristic, and a load circuit having a response characteristic complementary to the filter response connected intermediate to the ends of the filter. D. E. Foster, RCA, June 29, 1940. No. 2,280,695.

Mix with **REMLER** *Silver Tap*

ATTENUATORS

Enjoy the feel of self-cleaning pure silver on silver, ball bearings front and rear, precision machined in every detail. It's *smooth*. And those are the factors that make the REMLER silver attenuator QUIET—so quiet you can operate it in a low-level circuit in perfect ease and comfort. Standard impedances. Special values to order.

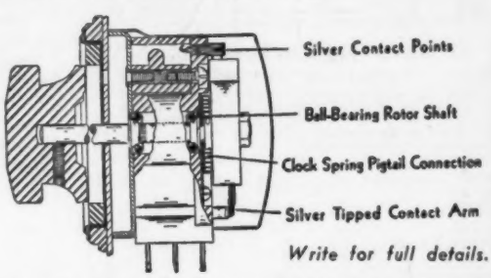

Write for full details.

REMLER COMPANY, Ltd. • 19th at Bryant • SAN FRANCISCO